

► **Code Number**
3918222

► **Description**

Concealed, Hydraulically Activated Sloan® Water Closet Flushometer, for Stainless Steel back spud water closets and Combination Fixtures. For use with: Acorn® Bradley® Willoughby® and similar fixtures.

► **Flush Cycle**

1.6 gpf/6.0Lpf

► **Specifications**

- Vacuum Breaker
- Exposed Parts Chrome Plated
- Non-Hold-Open Push Button, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Handle Packing, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant Non-Hold-Open Actuator
- Elbow Flush Connection and Coupling for 1-1/2" NPT Back Inlet (for connection in the pipe chase — flush connection through the wall not provided by Sloan)
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop


Valve Body, Cover and Tailpiece shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037.

► **Variations**


Hydraulic Actuator not included. Must specify separately



Water Closet

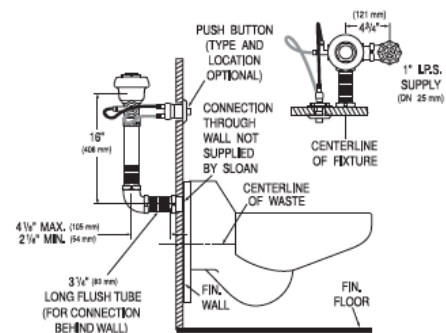

Combination Fixture

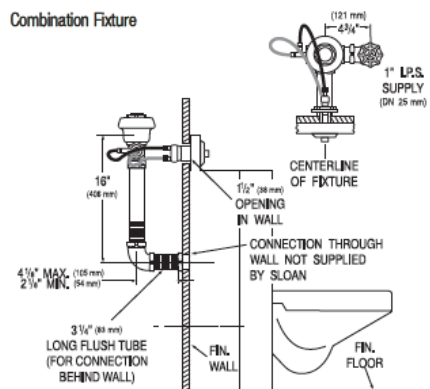

► **Compliance & Certifications**



Made In The
USA



This space for Architect/Engineer Approval



**Prison (600 Series) Sloan
Flushometers
9603**
