


**Z610****12-1/2 [318] SQUARE TOP HEAVY-DUTY
DRAIN**

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

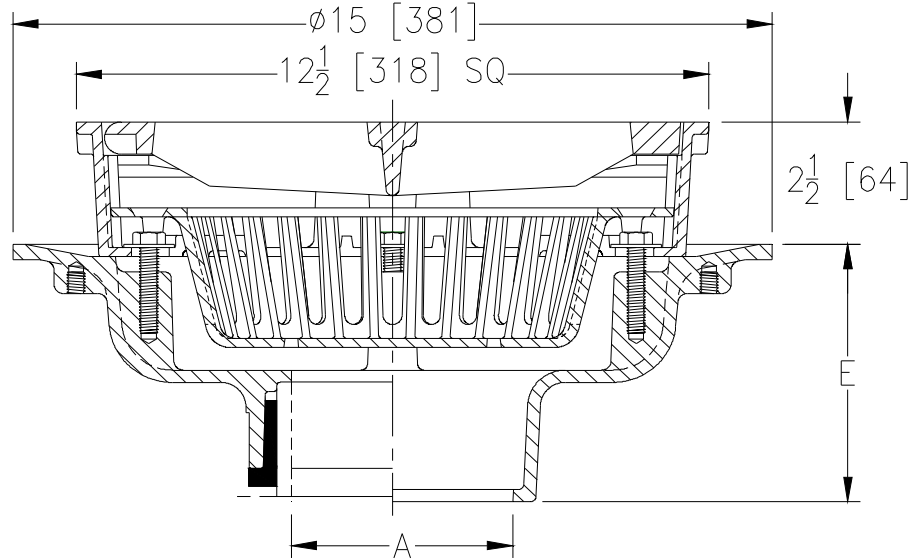

A Pipe Size In.[mm]	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2, 3, 4, 6 [51, 76, 102, 152]	54 [24]	42 [271]
8 [203]	56 [25]	

ENGINEERING SPECIFICATION: ZURN Z610

12-1/2" [305mm] Square top drain, Dura-Coated cast iron body with bottom outlet, seepage pan and combination membrane flashing clamp and frame for heavy-duty cast iron loose slotted grate, with suspended polypropylene sediment bucket.

OPTIONS (Check/specify appropriate options)**PIPE SIZE**

3, 4, 6 [76, 102, 152]
3, 4, 6 [76, 102, 152]
2, 3, 4, 6, [51, 76, 102, 152]
2, 3, 4, 6, 8 [51, 76, 102, 152, 203]
2, 3, 4 [51, 76, 102]

(Specify size/type) OUTLET

_____ IC Inside Caulk
_____ IG Inside Gasket
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc

'E' BODY HT. DIM.

5-1/4 [133]
5-1/4 [133]
3-3/4 [95]
5-1/4 [133]
4-5/8 [117]

PREFIXES

_____ Z D.C.C.I. Body and Top*
_____ ZB D.C.C.I Body w/Polished Bronze Top (Add 3/16 [5] to 2-1/2 [64] Dim. and 3/4 [19] to 12-1/2 [318] Dim.)
_____ ZN D.C.C.I Body w/Polished Nickel Bronze Top (Add 3/16 [5] to 2-1/2 [64] Dim. and 3/4 [19] to 12-1/2 [318] Dim.)

SUFFIXES

_____ -AR Acid Resistant Epoxy Coated Cast Iron	_____ -SC Solid Cover
_____ -DG Duresist Grate	_____ -SS Stainless Steel Mesh Liner for Bucket
_____ -DS Ductile Iron Solid Cover	_____ -TC Neo-Loc Test Cap Gasket
_____ -DX Dex-o-tex Flange (ZB, ZN Only)	(2, 3, 4 [51, 76, 102] NL Bottom Outlet Only)
_____ -F 2 [51] High Extension	_____ -TS Top Secured with Slotted Screws
_____ -G Galvanized Cast Iron	_____ -V Backwater Valve (See Z1099)
_____ -H Hinged Grate	_____ -VP Vandal-Proof Secured Top
_____ -HC Hinged Solid Cover	_____ -YA Aluminum Sediment Bucket
_____ -HL Hinged Locking Grate	_____ -YC Cast Iron Sediment Bucket
_____ -HLC Hinged Locking Cover	_____ -90 90° Threaded Side Outlet Body
_____ -LY (Less) Sediment Bucket	
_____ -P Trap Primer Connection	
_____ -S Secondary Strainer	

* Regularly furnished unless otherwise specified.