

uponor

# Plumbing Design Assistance Manual (PDAM)



**Plumbing Design Assistance Manual**

is published by

**Uponor Inc.**

5925 148th Street West  
Apple Valley, MN 55124 USA  
T 800.321.4739  
F 952.891.2008

**Uponor Ltd.**

6510 Kennedy Road  
Mississauga, ON L5T 2X4 CANADA  
T 888.994.7726  
F 800.638.9517

**uponorpro.com**

**uponorengineering.com**

© 2017 Uponor

All rights reserved.

Fourth Edition

First printing March 2008

Printed in the United States of America

Uponor has used reasonable efforts in collecting, preparing and providing quality information and material in this manual. However, system enhancements may result in modification of features or specifications without notice.

Uponor is not liable for installation practices that deviate from this manual or are not acceptable practices within the mechanical trades.

# Table of Contents

## Plumbing Design Assistance Manual

|  |           |
|--|-----------|
| <b>Foreword</b> . . . . .  | <b>iv</b> |
| <b>Chapter 1: Uponor PEX properties</b> . . . . .  | <b>1</b>  |
| Uponor PEX properties . . . . .  | 1         |
| PEX-a distinctions . . . . .   | 1         |
| Stress resistance . . . . .  | 1         |
| Cleanliness of Uponor PEX. . . . .   | 1         |
| Ultraviolet (UV) resistance . . . . .  | 2         |
| Chemical resistance . . . . .  | 2         |
| Oxidative resistance . . . . .   | 2         |
| Hydrostatic temperature and pressure ratings . . . . .                                   | 3         |
| Interpolation method . . . . .   | 3         |
| Excessive temperature and pressure capability . . . . .                                  | 3         |
| Standards, codes and listings . . . . .  | 4         |
| ProPEX® fittings. . . . .  | 5         |
| Uponor ProPEX engineered polymer (EP) fittings . . . . .                                 | 5         |
| The strength of Uponor EP . . . . .  | 6         |
| Uponor ProPEX lead-free (LF) brass fittings . . . . .                                    | 6         |
| Fittings by others . . . . .   | 6         |
| <b>Chapter 2: Making ProPEX connections</b> . . . . .                                    | <b>7</b>  |
| Distance between fittings . . . . .  | 7         |
| General ProPEX connection tips . . . . .   | 7         |
| Making ProPEX connections with Milwaukee® M12™ or M18™ ProPEX expansion tools . . . . .  | 8         |
| With auto rotation (standard Milwaukee heads) . . . . .                                  | 8         |
| Without auto rotation (standard Uponor heads) . . . . .                                  | 8         |
| Making ProPEX connections with Milwaukee M18 FORCELOGIC™ ProPEX expansion tools. . . . . | 10        |
| FORCELOGIC expansion head installation . . . . .   | 10        |
| Making a ProPEX connection . . . . .   | 11        |
| Making ProPEX connections with ProPEX 201 corded expander tools . . . . .                | 12        |
| Making 3/8" ProPEX connections . . . . .   | 14        |
| Proper expander tool and head maintenance . . . . .                                      | 14        |
| Disconnecting a ProPEX brass fitting . . . . .   | 15        |
| Troubleshooting ProPEX connections . . . . .   | 16        |
| <b>Chapter 3: Fire-resistant construction</b> . . . . .                                  | <b>17</b> |
| Wood-frame assemblies . . . . .  | 17        |
| Wood-frame floor/ceiling assemblies . . . . .  | 17        |
| Steel/concrete wall assemblies. . . . .  | 18        |
| Steel/concrete floor/ceiling assemblies. . . . .   | 18        |
| Wood-frame assemblies (U.S.). . . . .  | 19        |
| Wood-frame assemblies (Canada) . . . . .   | 21        |
| Concrete assemblies (U.S.) . . . . .   | 23        |
| Concrete assemblies (Canada). . . . .  | 24        |
| ASTM E814 or CAN/ULC-S115 . . . . .  | 25        |
| Fire stopping solutions . . . . .  | 25        |

|  |           |
|--|-----------|
| ASTM E814 and CAN/ULC-S115 listings . . . . .                      | 27        |
| Cast-in-place sleeves . . . . .                                    | 28        |
| ASTM E84 — surface burning characteristics . . . . .               | 29        |
| CAN/ULC-S102.2 — surface burning characteristics . . . . .         | 31        |
| Underwriters Laboratories (UL) 2846 . . . . .                      | 34        |
| <b>Chapter 4: Pipe sizing . . . . .</b>                            | <b>35</b> |
| Standard dimension ratio . . . . .                                 | 35        |
| Temperature and pressure ratings . . . . .                         | 35        |
| Pipe sizing an Uponor AquaPEX® plumbing system . . . . .           | 35        |
| Uniform friction loss method . . . . .                             | 37        |
| Uponor AquaPEX design parameters . . . . .                         | 39        |
| Friction loss with Uponor PEX piping . . . . .                     | 40        |
| Darcy-Weisbach method . . . . .                                    | 40        |
| Hazen-Williams method . . . . .                                    | 41        |
| Comparing Darcy-Weisbach and Hazen-Williams . . . . .              | 42        |
| Friction loss of fittings . . . . .                                | 42        |
| The $C_v$ method for calculating friction loss . . . . .           | 43        |
| UPC table 610.4 . . . . .  | 44        |
| IPC table E201.1 . . . . .   | 45        |
| NPCC table A-2.6.3.1(2)A . . . . .                                 | 47        |
| NPCC table 2.6.3.2 . . . . .                                       | 48        |
| <b>Chapter 5: System design and layout . . . . .</b>               | <b>51</b> |
| The Uponor advantage . . . . .                                     | 51        |
| Unit/in-suite piping . . . . .                                     | 51        |
| Uponor Logic plumbing . . . . .                                    | 52        |
| Efficiencies of Uponor Logic . . . . .                             | 53        |
| Hot-water performance . . . . .                                    | 53        |
| Reverse osmosis and de-ionized water systems . . . . .             | 54        |
| Surge pressure and sound intensity . . . . .                       | 54        |
| Water hammer . . . . .   | 54        |
| Water hammer arrestors . . . . .                                   | 54        |
| Hot-water system design . . . . .                                  | 55        |
| Recirculated hot-water systems . . . . .                           | 55        |
| Balancing of recirculated hot-water systems . . . . .              | 55        |
| Heat trace . . . . .   | 56        |
| Thermal conductivity . . . . .                                     | 56        |
| Insulation . . . . .   | 56        |
| Pre-insulated Uponor AquaPEX piping . . . . .                      | 56        |
| Uponor PEX vs. copper heat loss comparison — Btu/(hr•ft) . . . . . | 57        |
| Uponor Ecoflex® products . . . . .                                 | 58        |
| Thermal expansion and contraction . . . . .                        | 59        |
| <b>Chapter 6: Installation methods . . . . .</b>                   | <b>63</b> |
| Local code approvals . . . . .                                     | 63        |
| Storing and handling PEX . . . . .                                 | 63        |
| Uncoiling PEX . . . . .  | 64        |
| Bending PEX . . . . .  | 64        |

|   |            |
|---|------------|
| Reforming kinked piping . . . . .                                   | 64         |
| Thawing frozen piping . . . . .                                     | 64         |
| Supporting Uponor PEX pipe . . . . .                                | 65         |
| Supporting fittings and valves . . . . .                            | 66         |
| Uponor PEX-a Pipe Support . . . . .                                 | 68         |
| General requirements for PEX-a Pipe Support. . . . .                | 69         |
| Strapping requirements for PEX-a Pipe Support. . . . .              | 71         |
| ASTM E84 requirements for PEX-a Pipe Support . . . . .              | 72         |
| Expansion and contraction control with PEX-a Pipe Support . . . . . | 72         |
| Supporting Uponor multiport tees . . . . .                          | 73         |
| Vertical support requirements . . . . .                             | 75         |
| Support methods . . . . .   | 76         |
| Expansion-compensating devices . . . . .                            | 79         |
| Expansion and contraction: cold-water risers . . . . .              | 80         |
| Expansion and contraction: hot-water risers . . . . .               | 80         |
| Public-use fixtures . . . . .                                       | 81         |
| Pipe labels . . . . .   | 81         |
| Commercial flush bank detail . . . . .                              | 81         |
| Below-grade and in-slab installation . . . . .                      | 82         |
| Pre-insulated Uponor AquaPEX piping. . . . .                        | 82         |
| Pre-sleeved Uponor AquaPEX piping . . . . .                         | 82         |
| Water service requirements . . . . .                                | 82         |
| Trace wire . . . . .  | 82         |
| Trench bottom preparation . . . . .                                 | 84         |
| Piping embedment . . . . .  | 84         |
| H-20 loads . . . . .  | 85         |
| Horizontal directional drilling (HDD) . . . . .                     | 85         |
| Water system disinfection . . . . .                                 | 86         |
| Pressure-testing procedures . . . . .                               | 86         |
| Insulation . . . . .  | 87         |
| Icynene® spray foam insulation. . . . .                             | 87         |
| Closed-cell spray foams . . . . .                                   | 87         |
| Recessed light fixtures . . . . .                                   | 87         |
| Painting Uponor AquaPEX . . . . .                                   | 88         |
| Termiticides/pesticides . . . . .                                   | 88         |
| <b>Appendix A: Fluid properties . . . . .</b>                       | <b>89</b>  |
| <b>Appendix B: Uponor PEX friction loss tables . . . . .</b>        | <b>91</b>  |
| <b>Appendix C: Fitting equivalent length . . . . .</b>              | <b>101</b> |
| <b>Appendix D: ProPEX fitting dimensions . . . . .</b>              | <b>111</b> |
| <b>Appendix E: Expansion arm and loop calculations . . . . .</b>    | <b>131</b> |
| <b>Appendix F: Pipe heat loss and surface temperature . . . . .</b> | <b>161</b> |

## Foreword

This design assistance manual is published for architects, building officials, engineers and mechanical contractors interested in Uponor professional plumbing systems. It describes general installation recommendations that use Uponor AquaPEX® piping products. Refer to local codes for additional requirements.

Uponor made reasonable efforts to collect, prepare and provide quality information and material in this manual. However, system enhancements may result in modification of features or specifications without notice.

Uponor is not liable for installation practices that deviate from this manual or are not acceptable practices within the mechanical trades, codes or standards of practice.

Refer to the Uponor AquaSAFE™ Installation Guide to install a combination plumbing and fire safety system using Uponor products.

Direct any questions regarding the suitability of an application or a specific design to a local Uponor representative by calling toll free 888.594.7726 (United States) or 888.994.7726 (Canada).

Note that this manual is available in English, Spanish and French at no charge. To order additional copies, go to [uponorpro.com/pdam](http://uponorpro.com/pdam).



## Chapter 1:

# Uponor PEX properties

### Uponor PEX properties

PEX is an acronym for crosslinked polyethylene. The “PE” refers to the raw material used to make polyethylene; the “X” refers to the crosslinking of the polyethylene across its molecular chains.


The molecular chains are linked into a three-dimensional network that makes PEX remarkably durable within a wide range of temperatures and pressures.

Currently, three methods exist for producing PEX.

- Engel or peroxide method (PEX-a)
- Silane method (PEX-b)
- Electron beam (e-beam) or radiation method (PEX-c)

All three processes generate pipe that is crosslinked to various degrees according to ASTM F876 and F877 standards.

Uponor manufactures Engel-method PEX-a pipe. The PEX industry considers this pipe superior because the crosslinking is done during the manufacturing process when the polyethylene is in its amorphous state (above the crystalline melting point). Accordingly, the degree of crosslinking reaches more than 80%, resulting in a more uniform product with no weak links in the molecular chain.




**Figure 1-1: PEX-a (Engel) 80%+ crosslinked**

### PEX-a distinctions

The properties of PEX-a pipe make it the most flexible PEX on the market. This flexibility allows the tightest bend radius available — six times the outside diameter of the pipe. Its flexibility also greatly reduces instances of kinked pipe. And in the rare instance of a kink, the thermal memory of PEX-a allows kink repair with a simple shot of heat from a heat gun.

The pipe’s shape memory also offers the unique opportunity for ProPEX® fitting connections. Shape memory allows PEX-a to expand and then shrink back to normal size — creating strong, durable and reliable fitting connections.

Finally, PEX-a pipe offers more resistance to crack propagation (how a crack grows) than PEX-b or PEX-c pipe. A crack that occurs in PEX-a pipe is the least likely to grow over time and cause leaks or damage.



**Figure 1-2: PEX-b (Silane) 65-70% crosslinked**


### Stress resistance

Pipe installed in commercial applications must be capable of withstanding the stresses that result from installation within commercial buildings.

Typical stresses include:

- Expansion and contraction that result from repeated heating and subsequent cooling of the heat-transfer fluid
- Mechanical abrasion, shearing and stretching that occurs as a result of installation, normal structural movement and heating and cooling from seasonal weather changes

Uponor PEX provides the durability and reliability that is needed for these applications and currently holds the unofficial world record for long-term testing at elevated temperature and pressure. From 1973 to 2009, the pipe was subjected to ongoing testing at 203°F (95°C) at 175 psi by Studvik in Sweden and BASF in Germany.



**Figure 1-3: PEX-c (Radiation) 70-75% crosslinked**

### Cleanliness of Uponor PEX

The quality materials and exacting process used in manufacturing Uponor AquaPEX® yield remarkably clean water-distribution piping. Uponor PEX piping is made by crosslinking high-density, high-molecular weight, 100% virgin polyethylene flake. It is subject to the highest testing, codes, listings and standards.

In addition to testing and certification at NSF International, Canadian Standards Association (CSA) and Underwriters Laboratories (UL), Uponor PEX piping has been tested and approved for potable-water applications by the most demanding agencies in the world, including DVWG-Germany, KIWA-Netherlands, CTSB-France and BSI-Great Britain.

Toxicity extraction testing performed in accordance with ANSI/NSF 61 Drinking Water System Components — Health Effects verifies Uponor PEX piping does not leach potentially harmful substances into the drinking water.

## Ultraviolet (UV) resistance

The test method for evaluating UV resistance as required by ASTM F876 is ASTM F2657 *Test Method for Outdoor Weathering Exposure of Cross-linked Polyethylene*

(PEX). According to ASTM F876, PEX piping must bear a four-digit code to signify the requirements it meets. The second digit in the code references the minimum ultraviolet (UV) resistance of the piping. For example,

piping with a 5106 marking has a "1" as the second digit, which indicates the piping meets minimum UV resistance requirements for a period of 1 month. Piping with a "2" as the second digit indicates a resistance period of 3 months.

## Chemical resistance

PEX has very good resistance to chemical-dissolving agents. The unique molecular structure is stable and inert, and it is virtually unaffected by chemicals (organic or inorganic) commonly found in plumbing systems. Contact Uponor Technical Support for specific chemical compatibility verification. Review the Plastics Pipe Institute (PPI) Technical Report 19 *Chemical Resistance of Thermoplastics Piping Materials* for more information about the transport of chemicals.

| Product              | Marking | UV resistance |
|----------------------|---------|---------------|
| Uponor AquaPEX White | 5106    | 1 month       |
| Uponor AquaPEX Blue  | 5206    | 3 months      |
| Uponor AquaPEX Red   | 5206    | 3 months      |

**Table 1-1: Uponor AquaPEX® UV resistance ratings**

**Note:** Uponor AquaPEX purple reclaimed water pipe has not been tested for UV resistance and therefore retains a 5006 rating.

For the minimum UV resistance of all Uponor AquaPEX products, refer to **Table 1-1**.

**Note:** See **page 87** for handling guidelines regarding light fixtures.

| Property  | English units   | SI units                           |
|---|---|------------------------------------|
| Approximate modulus of elasticity (Secant at 1% and 1% and 73°F/22.8°C) | 91,350 psi  | 630 N/mm <sup>2</sup>              |
| Tensile yield strength at 68°F (20°C) per DIN 53455                     | 2.76-3.77 psi   | 19-26 N/mm <sup>2</sup>            |
| Piping density  | 59 lbs./ft <sup>3</sup>                                     | 936 Kg/m <sup>3</sup>              |
| Impact strength   | Will not fail under impact at temperatures of -284°F/-140°C |                                    |
| Water absorption  | Room temperature = 0.01%<br>Boiling for 40 days = 0.07%     |                                    |
| Coefficient of friction (surface-roughness factor)                      | 0.000019 inches   | 0.0005 mm                          |
| Surface tension   | 0.00014 lbs./inches   | 25 dyne/cm                         |
| Recommended working-temperature limits                                  | -58°F to 200°F  | -50°C to 93°C                      |
| Short-term maximum temperature  | 210°F   | 99°C                               |
| Coefficient of linear expansion at 135°F/57°C                           | Ave. = 9.2*10 <sup>-5</sup> in/in-°F                        | Ave. = 1.7*10 <sup>-4</sup> m/m-°C |
| Softening temperature   | 264°F to 268°F  | 129°C to 131°C                     |
| Specific heat   | 0.55 Btu/lb-°F  | 2302.3 J/kg-°C                     |
| Coefficient of thermal conductivity                                     | 0.219 Btu/(hr-ft-°F)  | 0.38 W/(m-°K)                      |
| Degree of crosslinking  | 70 to 89% (per ASTM F876)                                   |                                    |
| Minimum bend radius   | Six times the outside diameter                              |                                    |

**Table 1-2: Material properties of Uponor AquaPEX piping**

| Dimensions and physical characteristics of SDR9 PEX pipe |           |                                    |                               |   |
|--|-----------|------------------------------------|-------------------------------|---|
| Nominal pipe size  | Pipe I.D. | Weight of pipe only lbs./ft (kg/m) | Contents of pipe gal/ft (l/m) | Weight of pipe and water lbs./ft (kg/m) |
| ¼"   | 0.241     | 0.04 (0.06)                        | 0.0024 (0.03)                 | 0.06 (0.089)                            |
| ⅜"   | 0.35      | 0.05 (0.074)                       | 0.005 (0.062)                 | 0.09 (0.136)                            |
| ½"   | 0.475     | 0.06 (0.089)                       | 0.0092 (0.114)                | 0.14 (0.203)                            |
| ¾"   | 0.671     | 0.1 (0.149)                        | 0.0184 (0.229)                | 0.25 (0.377)                            |
| 1"   | 0.862     | 0.2 (0.298)                        | 0.0303 (0.376)                | 0.45 (0.673)                            |
| 1¼"  | 1.054     | 0.34 (0.506)                       | 0.0453 (0.563)                | 0.72 (1.071)                            |
| 1½"  | 1.244     | 0.44 (0.655)                       | 0.0632 (0.785)                | 0.96 (1.428)                            |
| 2"   | 1.629     | 0.682 (1.015)                      | 0.1083 (1.345)                | 1.58 (2.351)                            |
| 2½"  | 2.011     | 0.93 (1.384)                       | 0.1649 (2.048)                | 2.3 (3.423)                             |
| 3"   | 2.4       | 1.28 (1.905)                       | 0.2351 (2.92)                 | 3.24 (4.821)                            |

**Table 1-3: Dimensions and physical characteristics of SDR9 PEX pipe**

## Oxidative resistance

The test method for evaluating oxidative resistance as required by ASTM F876 is ASTM F2023 *Test Method for Evaluating the Oxidative Resistance of Cross-linked Polyethylene (PEX) Piping and Systems to Hot Chlorinated Water*. According to ASTM F876, PEX piping must bear a four-digit code to signify the requirements it meets. The first digit in the code references the minimum chlorine resistance at end-use conditions.

Uponor AquaPEX was evaluated according to the ASTM F2023 test method for evaluating oxidative resistance to hot, chlorinated water. This is the most stringent test method in the industry. Uponor AquaPEX piping exceeds the minimum life expectancy requirement of 50 years when operating with end-use conditions of 100% recirculation at 140°F/60°C for potable water. Refer to **page 55** for proper hot-water system design.



## Hydrostatic temperature and pressure ratings

Through scientific research and historical experience, hydrostatic design basis (HDB) ratings have been shown to be useful indicators of relative long-term strength of thermoplastic materials when tested under the conditions specified in test method ASTM D2837. The HDB is used to determine the temperature and pressure ratings of a specific material. These temperature and pressure ratings are based on an extrapolated life of 50 years.

Standard PPI TR-3 defines the policies and procedures for developing HDB ratings for thermoplastic piping materials or pipe.

Uponor maintains standard-grade ratings for Uponor AquaPEX piping as tested in accordance with TR-3. Uponor AquaPEX carries the following temperature and pressure ratings shown in **Table 1-4**.

**Note:** Uponor engineered polymer (EP) and lead-free (LF) brass fittings carry the same temperature and pressure ratings as Uponor AquaPEX pipe.

**ASTM F876 temperature and pressure ratings for SDR9 PEX**

| Rated temperature | Hydrostatic design stress (HDS) psi | Pressure rating for water psi |
|-------------------|-------------------------------------|-------------------------------|
| 73.4°F/23°C       | 630                                 | 160                           |
| 180°F/82°C        | 400                                 | 100                           |
| 200°F/93°C        | 315                                 | 80                            |

**Table 1-4: Hydrostatic temperature and pressure ratings for Uponor AquaPEX piping**

These listings are published in PPI TR-4, a culmination report of the listings that are maintained with PPI.

## Interpolation method

Pressure ratings at different temperatures are determined by using a linear relationship between the standard-grade ratings. See **Table 1-5** for interpolated temperature and pressure ratings.

## Excessive temperature and pressure capability

In accordance with ASTM F876 *Standard Specification for Cross-linked Polyethylene (PEX) Piping*, the excessive temperature and pressure capability of Uponor AquaPEX is 210°F at 150 psi (99°C at 10 bar).

This standard requires that Uponor AquaPEX piping maintain its integrity for a period of 720 hours (30 days) at 210°F at 150 psi (99°C at 10 bar). If installed as directed, Uponor AquaPEX will withstand these conditions.

**Note:** Excessive temperature and pressure requirements are always subject to approval by local building codes (e.g., temperature and pressure-relief valves).



| Temperature and pressure ratings |                 |
|----------------------------------|-----------------|
| °F/°C                            | psi/bar         |
| <b>200.0/93.3</b>                | <b>80/5.5</b>   |
| 190.0/87.8                       | 90/6.2          |
| <b>180.0/82.2</b>                | <b>100/6.9</b>  |
| 170.0/76.7                       | 106/7.3         |
| 160.0/71.1                       | 111/7.7         |
| 150.0/65.6                       | 117.8.0         |
| 140.0/60.0                       | 123/8.5         |
| 130.0/54.4                       | 128/8.8         |
| 120.0/48.9                       | 134/9.2         |
| 110.0/43.3                       | 139/9.6         |
| 100.0/37.8                       | 145/10.0        |
| 90.0/32.2                        | 151/10.4        |
| 80.0/26.7                        | 156/10.8        |
| <b>73.4/23.0</b>                 | <b>160/11.0</b> |
| 60.0/15.6                        | 168/11.6        |
| 50.0/10.0                        | 173/11.9        |
| 40.0/4.4                         | 179/12.3        |

**Table 1-5: Interpolated hydrostatic temperature and pressure ratings for Uponor AquaPEX piping**

## Standards, codes and listings

Uponor AquaPEX piping is manufactured to meet the following requirements.

### Standards

#### ASTM International

- ASTM F876 *Standard Specification for Cross-linked Polyethylene (PEX) Piping*
- ASTM F877 *Standard Specification for Cross-linked Polyethylene (PEX) Plastic Hot- and Cold-Water Distribution Systems*
- ASTM F1960 *Standard Specification for Cold Expansion Fittings with PEX Reinforcing Rings for Use with Cross-linked Polyethylene (PEX) Piping*
- ASTM F2023 *Standard Test Method for Evaluating the Oxidative Resistance of Cross-linked Polyethylene (PEX) Piping and Systems to Hot Chlorinated Water*
- ASTM F2657 *Standard Test Method for Outdoor Weathering Exposure of Cross-linked Polyethylene (PEX) Piping*
- ASTM E84 *Standard Test Method for Surface Burning Characteristics of Building Materials*
- ASTM E119 *Standard Test Methods for Fire Tests of Building Construction and Materials*
- ASTM E814 *Standard Test Method for Fire Tests of Through-Penetration Firestop Systems*

#### NSF International

- ANSI/NSF *Standard 14 Plastics Piping System Components and Related Materials*
- ANSI/NSF *Standard 61 Drinking Water System Components — Health Effects*
- ANSI/NSF *Standard 359 Valves for Crosslinked Polyethylene (PEX) Water Distribution Systems*

#### American Water Works Association (AWWA)

- AWWA C904 *Cross-Linked Polyethylene (PEX) Pressure Pipe, ½" (12mm) through 3" (76mm) for Water Service*

#### Underwriters Laboratories, Inc. (UL)

- ANSI/UL 263 *Standard for Safety for Fire Tests of Building Construction and Materials*
- UL 1821 *Standard for Safety for Thermoplastic Sprinkler Pipe and Fittings for Fire Protection Service (NFPA 13D applications only)*
- UL 2846 *Standard for Safety for Fire Test of Plastic Water Distribution Plumbing Pipe for Visible Flame and Smoke Characteristics*

#### CSA Group (Canadian Standards Association)

- CAN/CSA B137.5 *Crosslinked Polyethylene (PEX) Piping Systems for Pressure Applications*
- CAN/CSA B214 *Installation Code for Hydronic Heating Systems*

#### American Society of Mechanical Engineers (ASME)

- ASME B16.5 *Pipe Flanges and Flanged Fittings: NPS ½ through NPS 24 Metric/ Inch Standard*

#### Underwriters Laboratories of Canada (ULC)

- CAN/ULC-S102.2 *Standard Method of Test for Surface Burning Characteristics of Flooring, Floor Covering and Miscellaneous Materials and Assemblies*
- CAN/ULC-S101 *Standard Methods of Fire Endurance Tests of Building Construction and Materials*
- CAN/ULC-S115 *Standard Method of Fire Tests of Firestop Systems*
- CAN/ULC/ORD-C199P *Combustible Piping for Sprinkler Systems*

#### Plastics Pipe Institute (PPI)

- PPI Technical Report TR-4

### Codes

- ICC
- IPC
- IMC
- IRC
- UPC
- UMC
- NSPC
- HUD
- UFGS
- NPC of Canada
- NBC of Canada

### Listings

- cNSFus-fs
- cNSFus-rfh
- cNSFus-pw
- cQAlus
- UL
- CSA
- WH
- ETL
- PPI TR-4
- ICC-ES-PMG
- IAPMO
- BMEC
- CCMC

## ProPEX® fittings

Uponor ProPEX® fittings are available in both EP and LF brass and are tested and listed to:

- ASTM F1960 *Standard Specification for Cold Expansion Fittings with PEX Reinforcing Rings for Use With Cross-linked Polyethylene (PEX) Piping*
- CAN/CSA B137.5 *Crosslinked Polyethylene (PEX) Piping Systems for Pressure Applications*

## Uponor ProPEX EP fittings

### Accessibility

Based on Uponor's review of the International Plumbing Code (IPC), National Plumbing Code of Canada (NPCC) and Uniform Plumbing Code (UPC), there are no requirements for direct access to Uponor ProPEX fittings (i.e., ASTM F1960 and CAN/CSA B137.5). Thus, ProPEX fittings (which includes Uponor's multport tees) may be placed behind drywall or other coverings without the need for openings or similar means of direct access to the fittings. However, codes require that an operating valve must be accessible. Thus, a valve or similar operable component that incorporates Uponor ProPEX connections must be accessible.

### Performance

EP is a high-performance thermoplastic material that has superior mechanical, chemical and thermal properties which provide dimensional stability in demanding applications, including areas of high stress, heat and moisture.

Uponor EP fittings comply with NSF/ANSI 61 health effects requirements when tested at temperatures up to and including 180°F/82.2°C (i.e., commercial hot water).

### Durable

Resistant to corrosion, pitting and scaling, Uponor EP products are designed for any plumbing — and even heating — application, whether residential or commercial.

**Note:** Do not expose EP fittings to direct sunlight for more than 30 days.

### Lead free

EP fittings are the ideal solution to lead-free requirements and are even approved for direct burial in soil, making installation options endless.

### Cost effective

Uponor EP is a more cost-effective option because it offers a stable material cost and is not subject to the wide price fluctuations of metal.



Couplings



Elbows



Tees



Plugs



Multiport tees



## The strength of Uponor EP

Uponor EP is made from UDEL® polysulfone, Radel R® polyphenylsulfone or Acudel® modified polyphenylsulfone. These materials are part of a family of polymers that have been used successfully in the demanding environments of medical appliance, aerospace and plumbing for many years. In fact, lab tests prove the Uponor 2" ProPEX EP Tee and ProPEX connection are able to withstand up to 2,900 lbs. of pull force without failure.



Figure 1-4: Beginning of test



Figure 1-5: At approximately 2,900 lbs. of pull force



### Uponor ProPEX LF brass fittings

Uponor offers a complete line of LF brass transition fittings, valves, stub-outs, water-heater connectors and wall boxes.

- All Uponor LF brass products comply with NSF/ANSI 61 Annex G, NSF/ANSI 372 and conform to the lead-content requirements for "lead-free" plumbing as defined by California, Vermont, Maryland and Louisiana state laws as well as the U.S. Safe Drinking Water Act, effective January 2014.

- All Uponor LF brass fittings marked as NSFus-pw-G comply with the dezincification resistance (DZR) and stress-corrosion cracking (SCC) requirements of Sections 5.8.1 and 5.8.2 per the current NSF 14 Standard.
- Uponor's LF brass is approved for direct burial in soil per NSF/ANSI Standard 14 testing which established minimum performance criteria for DZR/SCC resistance for PEX fittings intended for potable water.

### Soldering

- When soldering LF brass fittings, Uponor recommends using a lead-free flux and solder which meet the requirements of NSF/ANSI 372 or NSF/ANSI 61 Annex G. Please refer to the solder and flux manufacturer for details on properly soldering lead-free brass materials.

### Fittings by others

Uponor PEX piping can be used with any type of SDR9 PEX fitting, including compression fittings. Compression fittings must be installed with an insert stiffener to ensure the pipe wall doesn't collapse under compression, compromising the connection.

Note that Uponor cautions the use of other manufacturer's PEX pipe with Uponor ProPEX rings as well as using other's expansion rings with Uponor PEX pipe. Because of the lower degree and uniformity of crosslinking in PEX-b and PEX-c pipe, stress cracking of the PEX-b and PEX-c pipe wall can occur during expansion, compromising the strength of the fitting connection. Additionally, the 25-year limited warranty for Uponor PEX systems is only valid when using both Uponor PEX pipe and Uponor

ProPEX fittings. Mixing Uponor ProPEX rings with other manufacturers' PEX pipe or other manufacturers' expansion rings with Uponor PEX pipe will limit the warranty. For complete warranty details, refer to [uponorpro.com/warranties](http://uponorpro.com/warranties).


**Note:** When transitioning from copper to PEX, Uponor recommends the use of ProPEX LF brass copper press adapters. Standard Uponor LF brass sweat adapters cannot be pressed as they are a different material.

## Chapter 2: Making ProPEX connections

Uponor ProPEX ASTM F1960 (CAN/CSA B137.5) cold-expansion fittings make solid, permanent, manufactured connections without the need for torches, glues, solder, flux or gauges. The unique shape memory of Uponor PEX piping forms a tight seal around the fitting, creating a strong, reliable connection.

This document shows how to make proper ProPEX connections using one of the following tools.

- Milwaukee® M12™ or M18™ ProPEX expansion tools
- Milwaukee M18 FORCELOGIC™ ProPEX Expansion Tool
- ProPEX 201 Corded Expander Tool
- ProPEX Hand Expander Tool

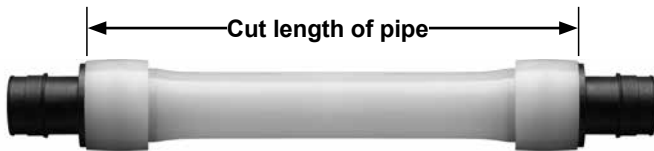

### Distance between fittings

Uponor requires a minimum distance between ProPEX fittings to ensure the fittings are not damaged during the expansion process by the expander head. Refer to **Table 2-1** for the minimum distance between fittings, which is expressed as cut length of pipe.

| Nominal fitting size | Cut length of pipe |
|----------------------|--------------------|
| ½"                   | 2"                 |
| ¾"                   | 3"                 |
| 1"                   | 3½"                |
| 1¼"                  | 4½"                |
| 1½"                  | 4½"                |
| 2"                   | 6"                 |
| 2½"                  | 7½"                |
| 3"                   | 9"                 |

**Table 2-1: Minimum distance between ProPEX fittings**

| Piping size | Milwaukee ProPEX tool |     |            | Uponor ProPEX tool |         |     |
|-------------|-----------------------|-----|------------|--------------------|---------|-----|
|             | M12                   | M18 | FORCELOGIC | Manual             | 100/150 | 201 |
| ⅜"          | 8                     | 9   | —          | 5                  | 7       | —   |
| ½"          | 5                     | 6   | —          | 4                  | 4       | —   |
| ¾"          | 9                     | 8   | —          | 9                  | 9H      | —   |
| 1"          | 12                    | 5   | —          | 14                 | 7H      | —   |
| 1¼"         | —                     | 7   | —          | —                  | 7H      | —   |
| 1½"         | —                     | 6   | —          | —                  | 8H      | —   |
| 2"          | —                     | —   | 4          | —                  | —       | 5H  |
| 2½"         | —                     | —   | 5          | —                  | —       | —   |
| 3"          | —                     | —   | 7          | —                  | —       | —   |

**Table 2-2: Recommended number of expansions for ⅜" to 3" piping at 73.4°F (23°C)**

**Note:** "H" in the table refers to Uponor H-series expander heads.



### General ProPEX connection tips

- If the fitting does not slide into the piping all the way to the stop, immediately remove it from the piping and expand the piping one final time.

**Note:** To avoid over-expanding the piping, do not hold the piping in the expanded position.

- **Table 2-2** shows the recommended number of expansions. Experience, technique and weather conditions influence the actual number of expansions. Fewer expansions may be necessary under certain conditions. The correct number of expansions is the amount necessary for the piping and the shoulder of the fitting to fit snugly together.

- Ensure the ProPEX ring rests snugly against the fitting shoulder. If there is more than ⅛" (1mm) between the ring and the shoulder of the fitting, the connection must be replaced. Square cut the piping 2" away from the fitting for ½" to 1" pipe, 3" away for 1¼" to 2" pipe and 5" away for 2½" and 3" pipe prior to making the new connection.
- Brass ProPEX fittings can be disconnected and reused. EP fittings must be discarded. Be sure to follow the recommended minimum distance between ProPEX fittings shown in **Table 2-1**.



# Making ProPEX connections with Milwaukee M12 or M18 ProPEX expansion tools

**Note:** All standard Uponor expander heads are compatible with the M12 and M18 tools. Uponor expander heads will not auto-rotate on the Milwaukee tools (only Milwaukee expansion heads will auto-rotate on the M12 and M18). H-heads are not compatible with Milwaukee tools and Milwaukee heads are not compatible with Uponor tools. Milwaukee heads are easily distinguished by color coding and the Milwaukee logo.



3/8" and 1/2" Milwaukee expansion head



3/4" to 3" Milwaukee expansion head

**Important!** Making expansions are slightly different when using a tool that features auto rotation. When making a ProPEX connection, be sure to follow the guidelines for the tool you are using in your application.

1. Square cut the PEX piping perpendicular to the length of the piping. Remove all excess material or burrs that might affect the fitting connection.
2. Slide the ProPEX ring over the end of the piping until it reaches the stop edge. If using a ProPEX ring without a stop edge, extend the ring over the end of the piping no more than 1/16" (1mm).

**Important!** If making a 3/8" ProPEX connection, first expand each side of the ring before placing it on the piping. Refer to the "Making 3/8" ProPEX connections" instructions on **page 14** for further information.

### With auto rotation (standard Milwaukee heads)

3. Milwaukee ProPEX expansion tools come with built-in auto rotation. If using a Milwaukee expansion head, simply hold the piping and tool in place while holding the trigger to expand the piping. The head will automatically rotate to ensure the piping is evenly expanded. Continue expanding and rotating until the piping and ring are snug against the shoulder on the expander head. See **Table 2-2** for the recommended number of expansions for each piping size.

**Note:** Do not force the pipe onto the expander head. Ensure the expander head is rotating during each expansion.

### Without auto rotation (standard Uponor heads)

4. Press the trigger to expand the piping.
5. Release the trigger, remove the head from the piping, rotate it 1/8 turn and slide the head back into the piping. Continue expanding and rotating until the piping and ring are snug against the shoulder on the expander head. See **Table 2-2** for the recommended number of expansions.

**Important!** Rotating the tool between expansions will provide smooth, even expansion of the piping. Failure to rotate the tool will cause deep grooves in the piping which can result in potential leak paths.



Expansion with Milwaukee M12 ProPEX Expansion Tool



ProPEX coupling

Insert ProPEX fitting into 1/2" Uponor PEX piping.



ProPEX tee

Insert ProPEX fitting into 1" Uponor PEX piping.

6. After the final expansion, immediately remove the tool and insert the fitting. Ensure the piping and ring seat against the shoulder of the fitting.

**Important!** Only perform the necessary number of expansions. DO NOT over expand the pipe. You should feel some resistance as the fitting goes into the piping. If you do not feel any resistance, the piping may be over expanded and will require additional time to shrink over the fitting.



Expansion with Milwaukee M18 ProPEX Expansion Tool

# Making ProPEX connections with Milwaukee M18 FORCELOGIC ProPEX expansion tools




## FORCELOGIC expansion head installation

The Milwaukee FORCELOGIC ProPEX Expansion Tool for 2", 2½" and 3" Uponor PEX pipe features an auto-rotating head with specially designed alignment cogs. This requires slightly different head installation than the M12 and M18 ProPEX expansion tools for ¾" to 1½" pipe sizes.

1. Remove the battery pack and place the FORCELOGIC tool in the upright position (cone up).
2. Verify the expansion cone is fully retracted.
3. Screw the head onto the tool (clockwise). Hand-tighten securely. Do not over tighten. Ensure the expansion head fits flush against the tool.
4. Check the installation.
  - a. Ensure the head segments do not "flower" (see **image 4a**).
  - b. If the head flowers, correct the installation by loosening the head slightly and rotating the segments until they engage in the cogs. Re-tighten the head.
  - c. Rotate the six expansion segments in the clockwise direction. They will rotate freely. They should not rotate counterclockwise.
  - d. The expansion head collar will fit flush against the tool.



Auto-rotate teeth



Incorrect expansion head "flowering"



Correct expansion head alignment



## Making a ProPEX connection

1. Square cut the PEX piping perpendicular to the length of the piping. Remove all excess material or burs that might affect the fitting connection.
2. Slide the ProPEX ring over the end of the piping until it reaches the stop edge.
3. The Milwaukee tool comes with built-in auto rotation, meaning the head will automatically rotate to ensure the piping is evenly expanded.



**Note:** To cancel the expansion process quickly, pull and release the trigger.

4. Press the trigger to initiate the rotation of the head. A green light will turn on and the work light will blink. Insert the pipe and ring and release the trigger. When the expansion head has reached its maximum diameter, it will retract.


**Important!** Do not force the pipe and ring on the head during any expansion.

5. After the tool has retracted, the green indicator light blinks three times. Press the trigger and repeat the expansion process.

6. Repeat the process until the pipe and ring are snug against the shoulder of the expansion head. Repeat the expansion one or two more times depending on the ambient temperature.

**Note:** Fewer expansions are required in colder temperatures.

7. After final expansion, immediately remove the tool and insert the fitting.



# Making ProPEX connections with ProPEX 201 corded expander tools



1. Square cut the PEX piping perpendicular to the length of the piping. Remove all excess material or burrs that might affect the fitting connection.
2. Slide the ProPEX ring over the end of the piping until it reaches the stop edge. If using a ProPEX ring without a stop edge, extend the ring over the end of the piping no more than  $\frac{1}{16}$ " (1mm).
3. Slide the expander head into the piping until it stops. Full expansions are necessary to make a proper connection.
4. Press the trigger to expand the piping.



5. Release the trigger, remove the head from the piping, rotate it  $\frac{1}{8}$  turn and slide the head back into the piping. Continue expanding and rotating until the piping and ring are snug against the shoulder on the expander head. See **Table 2-2**.

**Important!** Rotating the tool between expansions will provide smooth, even expansion of the piping. Failure to rotate the tool will cause deep grooves in the piping which can result in potential leak paths.

6. After the final expansion, immediately remove the tool and insert the fitting. Ensure the piping and ring seat against the shoulder of the fitting.



Insert ProPEX fitting into 2" Uponor PEX piping.



ProPEX EP tee inserted into 2" Uponor PEX piping



ProPEX 2" brass fitting inserted into Uponor PEX piping



## Making 3/8" ProPEX connections

When making a 3/8" ProPEX connection, expand the ring once on each side to properly fit over the piping. Refer to the following instructions to make a 3/8" ProPEX connection.

1. Square cut the PEX piping perpendicular to the length of the piping. Remove all excess material or burrs that might affect the fitting connection.
2. Expand each side of the ring once.
3. Slide the expanded ring over the end of the piping. Extend the end of the ring over the end of the piping no more than 1/16" (1mm).
4. After the ring is on the piping, continue with the regular steps for making a proper connection with your specific tool.



E6081128 pipe cutter (plastic)

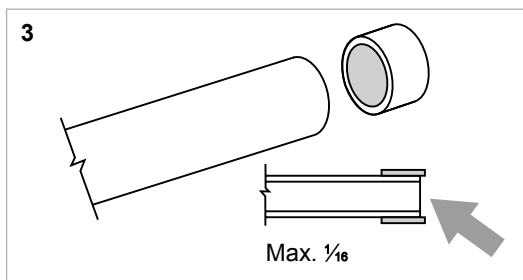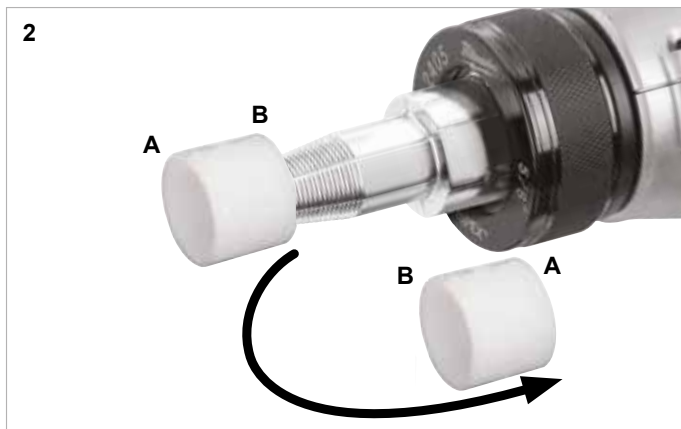

## Proper expander tool and head maintenance

- Use a lint-free cloth to apply a light coat of lubricant to the cone prior to making any ProPEX connections.
- If used regularly, apply the lubricant daily to the cone of the ProPEX expander tool. Failure to keep the tool lubricated may result in improper connections.



**Caution:** Excessive lubrication may result in improper connections. Only use a small amount of lubrication to keep the tool working properly.

- Keep all other parts of the tool free from lubricant.
- Once a month, soak the heads in degreasing agent to remove any grease from between the segments. Clean the cone using a clean, dry cloth.

### Important tips for a proper 3/8" ProPEX connection

- The thicker 3/8" ProPEX Ring shrinks over the fitting faster than larger-sized rings.
- When the temperature is below 40°F (4.4°C), fewer expansions are required.

## Disconnecting a ProPEX brass fitting

ProPEX brass and EP fittings are manufactured connections that can be concealed in walls, ceilings and floors. When necessary, ProPEX brass fittings can be disconnected.

**Important!** EP fittings cannot be reclaimed.

Refer to the following guidelines for disconnecting a ProPEX brass fitting.

1. Ensure the system is not pressurized.
2. Use a utility knife to carefully cut through the ProPEX ring.

**Important!** Do not heat the ring prior to cutting it. Take care to cut only the ring and not the piping or fitting. Gouges in the fitting may result in leaks. If you accidentally damage the fitting, you must discard it.

3. Remove the ProPEX ring from the piping.
4. After removing the ring, apply heat directly around the fitting and piping connection.  
**Do not use open flame.** Gently work the piping back and forth while pulling slightly away from the fitting until the piping separates from the fitting.
5. After removing the fitting, measure:  
2" (50.8mm) minimum for  $\frac{3}{8}$ " to 1" pipe  
3" (76.2mm) minimum for  $1\frac{1}{4}$ " to 2" pipe  
5" (127mm) minimum for  $2\frac{1}{2}$ " and 3" pipe
6. Square cut the piping at the proper marking.
7. Allow the fitting to cool before making the new connection.
8. Use a new ProPEX ring and follow the steps to make a new connection.



## Troubleshooting ProPEX connections

Trouble-free ProPEX installations begin with a tool that is maintained in proper working condition. If the tool or segment fingers are damaged, it is very difficult to make a proper connection. Refer to the following guidelines to assist with challenges in the field.

### Fittings won't seal

- Make sure the expander head is securely tightened onto the tool.
- Ensure the segment fingers are not bent. If the head does not completely close when the drive unit is fully retracted or the handles of the manual tool are open, replace the head.
- Examine the tool for excess grease on the segment fingers. Remove excess grease prior to making connections.
- Check the fitting for damage. Nicks and gouges will cause the fitting to leak.
- Make sure the internal driver cone is not damaged or bent.
- Make sure the last expansion is not held in the expanded position before the fitting is inserted. You should feel some resistance as the fitting goes into the piping. If you do not feel any resistance, the piping may be over expanded and will require additional time to shrink over the fitting.
- Be sure to rotate the tool  $\frac{1}{8}$  turn after each expansion to avoid deep grooves in the piping which can result in potential leak paths.

### Expansion is difficult


- Make sure the internal cone is properly greased.

### Expansion head slips out of piping when making expansions


- Ensure the piping and ProPEX ring are dry.
- Make sure that grease is not getting into the piping.
- Examine the segment fingers to ensure they are not damaged or bent.

### ProPEX ring slides down piping during expansion

- Ensure your hands are clean while handling the piping. Any sweat or oils on your hands can act as a lubricant. Due to the smoothness of PEX, any form of lubricant can cause the ProPEX ring to slide down the piping during expansion.
- If you anticipate the ProPEX ring may possibly slide down, position the ring slightly farther over the end of the piping and make the first couple of expansions slowly. Once the ring and the piping begin to expand together, continue with the normal number and type of expansions.
- Place your thumb against the ProPEX ring to help support it and feel for any movement. If caught early, you can slide the ring up the piping and expand as described in the previous bullet point.

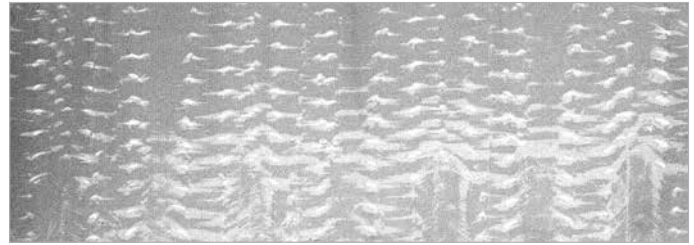

Expansion with proper rotation

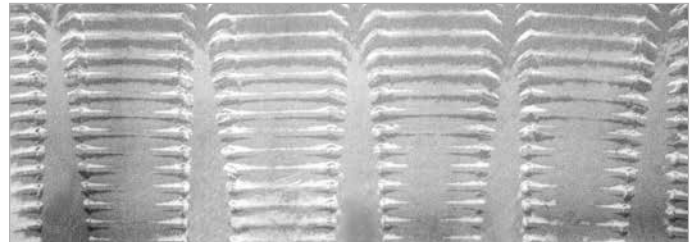

Expansion without proper rotation

### More than the recommended number of expansions are needed to make a connection

- Ensure the head is hand-tightened to the expander tool.
- Examine the segment fingers for damage.
- Be sure to completely cycle the tool on each expansion (i.e., close the manual tool handle or release the trigger).

### Cold-weather expansions

- Temperatures affect the time required for the piping and ring to shrink onto the fitting. The colder the temperature, the slower the contraction time.
- Warming ProPEX fittings and ProPEX rings reduces contraction time. Put fittings and rings in your pockets prior to installation to keep them warm.
- Fewer expansions are necessary in temperatures below 40°F (4.4°C).

**Note:** Do not use a heat gun on EP fittings to speed up the contraction time as this could result in damage to the fitting.

## Chapter 3:

# Fire-resistant construction

### Wood-frame wall assemblies

Wood-frame wall assemblies complying with ASTM E119 and CAN/ULC-S101 have the following requirements.

#### Building elements

- Studs: Nominal wood 2x4 spaced 16" on center (o.c.)
- Gypsum wallboard: Minimum one layer of 5/8" Type X gypsum wallboard

#### Pipe and fittings

- Pipe: Maximum density of Uponor PEX pipe is 4.85 lbs. per linear feet (7.23 kg/m) of cavity. Approved Uponor PEX pipes include:

- Uponor AquaPEX White (up to 3")
- Uponor AquaPEX Red (up to 1")
- Uponor AquaPEX Blue (up to 1")
- Uponor AquaPEX Reclaimed Water (up to 2")
- Pre-insulated Uponor AquaPEX (up to 2" pipe with 1½" thick insulation)
- Wirsbo hePEX™ (up to 4")

- Fittings: Maximum density of Uponor ProPEX brass or EP fittings is 3.33 lbs. (1.51 kg) per stud cavity.

**Note:** See assembly details for more information.

#### Assembly numbers

ITS Design No. UW/WA 60-02

- 1-hour
- Up to 2" PEX

QAI Design No. P321-1B

- 1-hour
- Up to 4" PEX

QAI Design No. P321-1H

- 2-hour
- Up to 4" PEX

UL Design No. U372

- 1-hour
- Up to 2" PEX

**Note:** Maximum size is available through QAI.

### Wood-frame floor/ceiling assemblies

Wood-frame floor/ceiling assemblies complying with ASTM E119 and CAN/ULC-S101 have the following requirements.

#### Building elements

- Joists: Nominal 2x10 solid sawn wood, open-web wood or wood I-joist (10" to 24" depth) installed at 24" o.c. maximum
- Subfloor: Minimum 5/8" plywood; if using optional topping, subfloor may be 5/8" oriented strand board (OSB)
- Gypsum wallboard:
  - Minimum one layer of 5/8" Type X gypsum wallboard when using solid sawn wood joists
  - Minimum two layers of 1/2" Type X gypsum wallboard when using wood I-joists (10" to 24" depth)

#### Pipe and fittings

- Pipe: One or more Uponor PEX piping runs 1/2" to 2"; weight of PEX piping not to exceed 0.63 lbs./ft. (0.94 kg/m) of joist cavity. Support pipe with metal clips 16" o.c. for piping up to 1" diameter or metal clips 24" o.c. for piping larger than 1" diameter.

- Fittings: Brass or EP fittings with a weight not exceeding 0.1 lbs./ft. (0.15 kg/m) per joist cavity

**Note:** See assembly details for more information.

#### Assembly numbers

ITS Design No. UW/FC 60-01

- 1-hour
- Up to 2" PEX

ITS Design No. UW/WA 60-02

- 1-hour
- Up to 2" PEX

QAI Design No. P321-1F

- 1-hour
- Up to 2" PEX

UL Design No. L557

- 1-hour
- Up to 2" PEX

### ASTM E119 (ANSI/UL 263) or CAN/ULC-S101 listings

| Fire-resistive assembly ratings (ASTM E119/ANSI/UL 263 and CAN/ULC-S101) |               |               |                   |                |
|--|---------------|---------------|-------------------|----------------|
| Construction type  | Assembly type | UL design no. | Intertek          | QAI            |
| Non-combustible concrete/steel   | Floor/ceiling | K913          | UW/FCA 120-01/-02 | P321-1D (2-hr) |
|  |               | G524          | —                 | P321-1E (2-hr) |
|  |               | G573          | —                 | P321-1C (2-hr) |
|  | Walls         | V444          | UW/WA 60-01       | P321-1A (1-hr) |
|  |               | —             | —                 | P321-1G (2-hr) |
| Wood frame construction  | Floor/ceiling | L557          | UW/FCA 60-01      | P321-1F (1-hr) |
|  | Walls         | U372          | UW/FCA 60-02      | P321-1B (1-hr) |
|  |               | —             | —                 | P321-1H (2-hr) |

**Table 3-1: ASTM E119 (ANSI/UL 263) and CAN/ULC-S101 listings**

## Steel/concrete wall assemblies

Steel/concrete wall assemblies complying with ASTM E119 and CAN/ULC-S101 have the following requirements.

### Building elements

Studs: 3<sup>5</sup>/<sub>8</sub>" steel studs spaced maximum 24" o.c.

- Gypsum wallboard: Minimum one layer of 5/8" thick Type X gypsum wallboard

### Pipe and fittings

- Pipe: Maximum density of Uponor PEX pipe is 4.85 lbs. per linear feet (7.23 kg/m) of cavity. Approved Uponor PEX pipes include:

- Uponor AquaPEX White (up to 3")
- Uponor AquaPEX Red (up to 1")
- Uponor AquaPEX Blue (up to 1")
- Uponor AquaPEX Reclaimed Water (up to 2")
- Pre-insulated Uponor AquaPEX (up to 2" pipe with 2" thick insulation)
- Pre-insulated Wirsbo hePEX (up to 2" pipe with 2" thick insulation)
- Wirsbo hePEX (up to 4")

- Fittings: Maximum density of Uponor ProPEX brass or EP fittings is 3.33 lbs. (1.51 kg) per stud cavity.

**Note:** See assembly details for more information.

### Assembly numbers

QAI Design No. P321-1A

- 1-hour
- Up to 4" PEX

QAI Design No. P321-1G

- 2-hour
- Up to 4" PEX

UL Design No. V444

- 1-hour
- Up to 4" PEX

**Note:** Maximum size is available through QAI.

## Steel/concrete floor/ceiling assemblies

Steel/concrete floor/ceiling assemblies complying with ASTM E119 or CAN/ULC-S101 have the following requirements.

### Building elements

- Concrete floor: Minimum slab thickness of 6<sup>1</sup>/<sub>2</sub>"
- Steel reinforcement: Various sized Grade 40 or 60 steel bars located as required by ACI-318
- Steel joists: Minimum nominal depth of 10" spaced maximum of 6'-0" o.c.
- Steel floor: Minimum 1<sup>1</sup>/<sub>2</sub>" depth, 22 gauge uncoated or galvanized fluted

### Pipe and fittings

- Pipe: Maximum volume of Uponor PEX pipe is 14 cubic inches per 1 cubic foot (8101 cubic centimeters per 1 cubic meter). Approved Uponor PEX pipes include:

- Uponor AquaPEX White (up to 2")
- Uponor AquaPEX Red (up to 1")
- Uponor AquaPEX Blue (up to 1")
- Uponor AquaPEX Reclaimed Water (up to 2")
- Pre-insulated Uponor AquaPEX (up to 2" pipe with 2" thick insulation)
- Pre-insulated Wirsbo hePEX (up to 2" pipe with 2" thick insulation)
- Wirsbo hePEX (up to 2")

**Note:** See assembly details for more information.

### Assembly numbers

ITS Design No. UW/FCA 120-01

- 1-hour
- Up to 2" PEX

ITS Design No. UW/FCA 120-02

- 2-hour
- Up to 2" PEX

QAI Design No. P321-1C

- 2-hour
- Up to 2" PEX

QAI Design No. P321-1D

- 2-hour
- Up to 2" PEX

QAI Design No. P321-1E

- 2-hour
- Up to 2" PEX

UL Design No. K913

- 2-hour
- Up to 2" PEX

UL Design No. G524

- 2-hour
- Up to 2" PEX

UL Design No. G573

- 2-hour
- Up to 2" PEX





## Wood-frame assemblies (U.S.)

### Multiport tee detail

Wood-frame floor/ceiling assembly (UL Design No. L557/QAI Design No. P321-1F)

Wood-stud wall assembly (UL Design No. U372/QAI Design No. P321-1B)

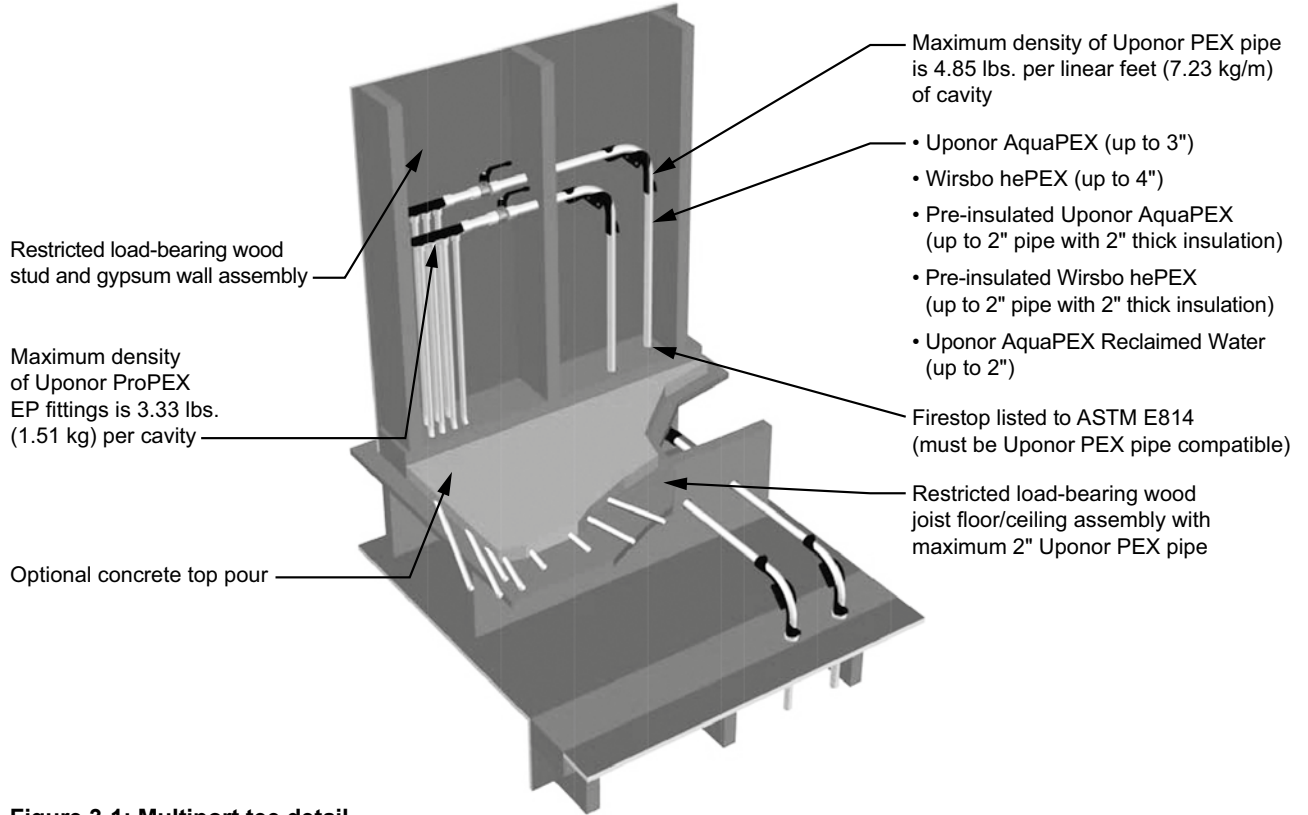


Figure 3-1: Multiport tee detail



### Fixture detail 1

Wood-frame floor/ceiling assembly (UL Design No. L557/QAI Design No. P321-1F)  
Wood-stud wall assembly (UL Design No. U372/QAI Design No. P321-1B)

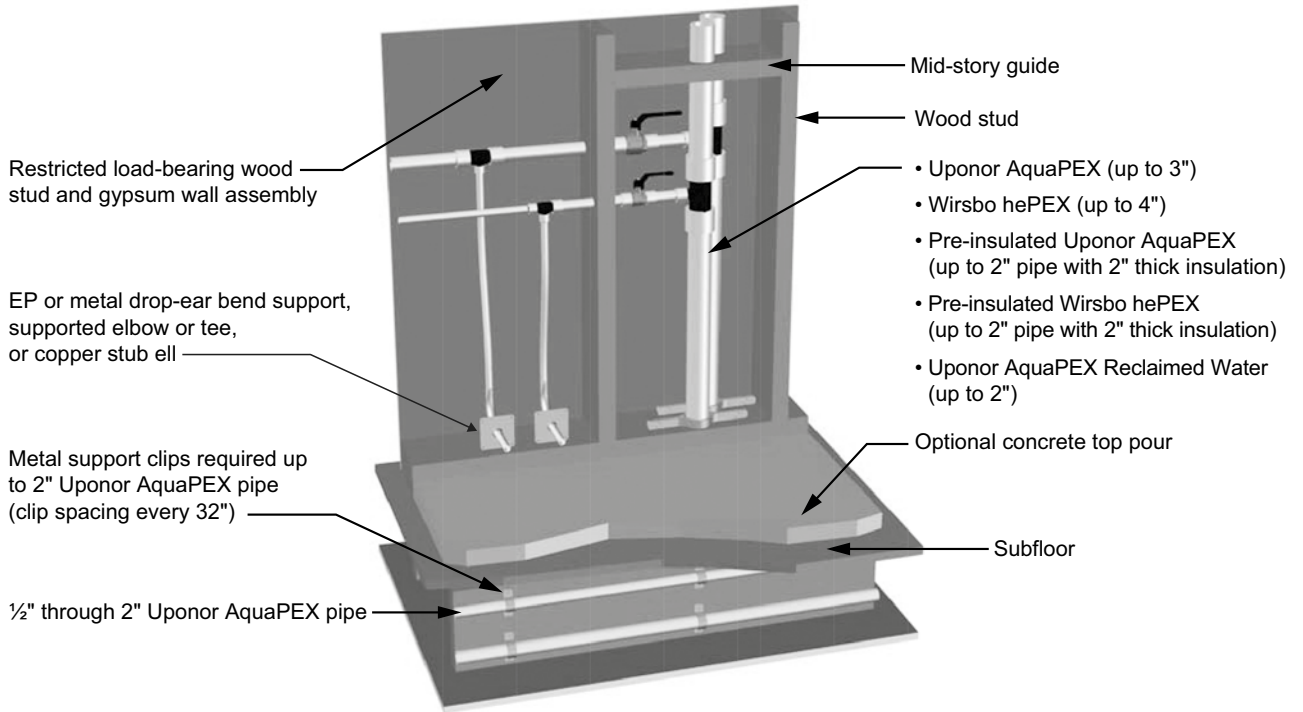


Figure 3-2: Fixture detail 1



### Fixture detail 2

Wood-frame floor/ceiling assembly (UL Design No. L557/QAI Design No. P321-1F)  
Wood-stud wall assembly (UL Design No. U372/QAI Design No. P321-1B)

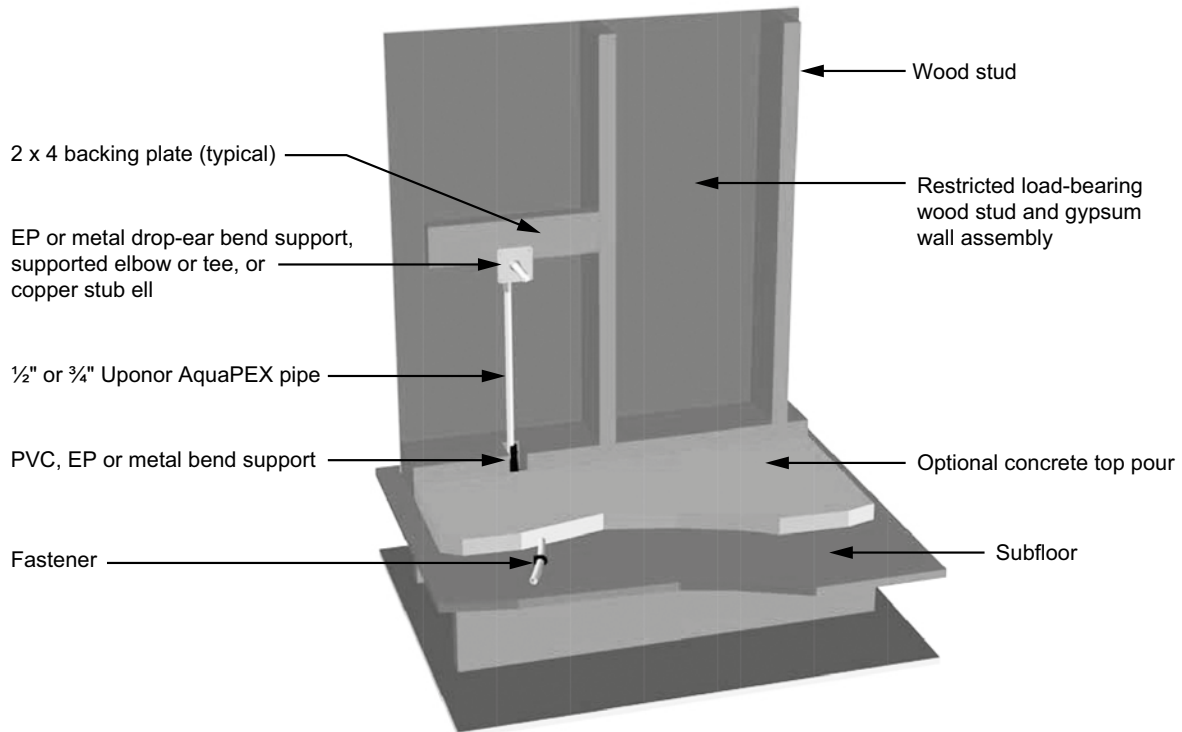


Figure 3-3: Fixture detail 2



## Wood-frame assemblies (Canada)

### Multiport tee detail

Wood-frame floor/ceiling assembly (ITS Design No. UW/FCA 60-01/QAI Design No. P321-1F)

Wood-stud wall assembly (ITS Design No. UW/WA 60-02/QAI Design No. P321-1B)

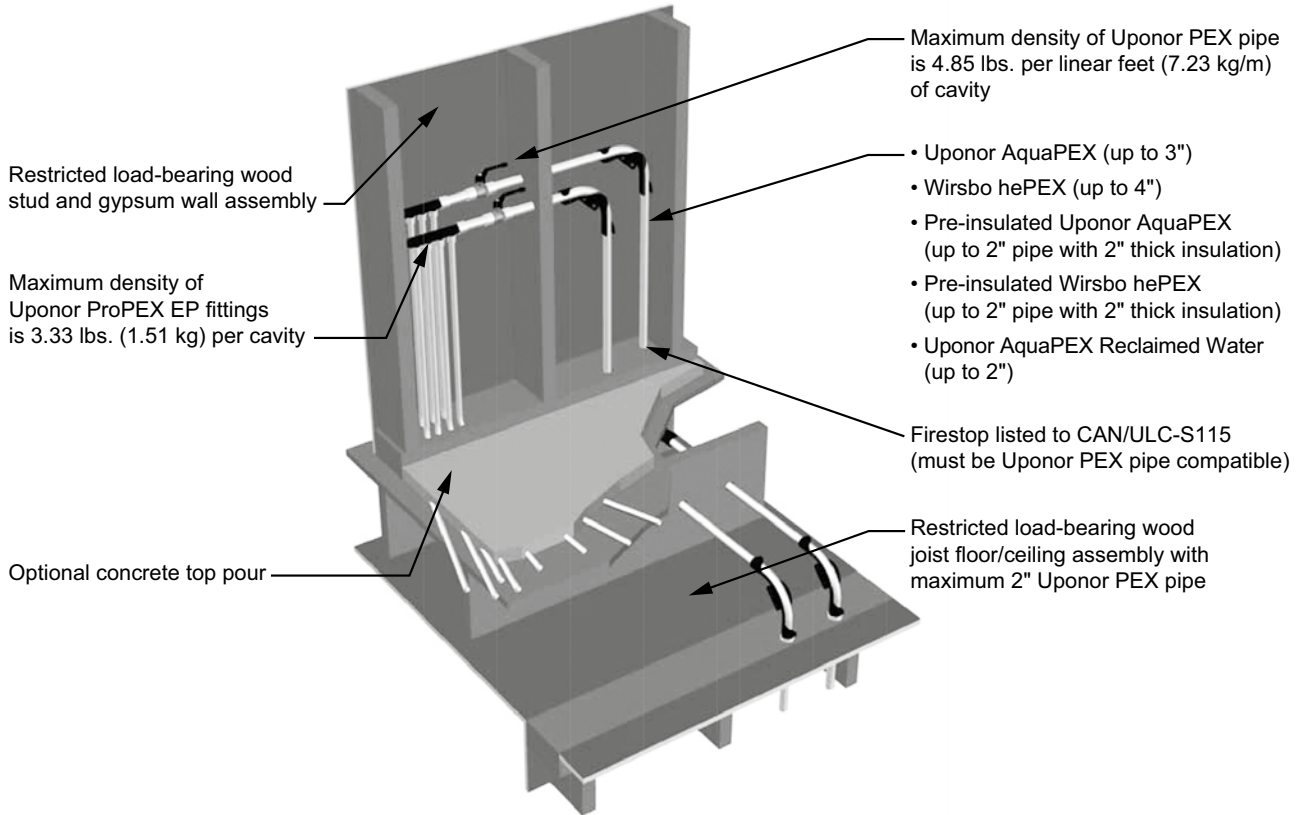


Figure 3-4: Multiport tee detail



### Fixture detail 1

Wood-frame floor/ceiling assembly (ITS Design No. UW/FCA 60-01/QAI Design No. P321-1F)  
Wood-stud wall assembly (ITS Design No. UW/WA 60-02/QAI Design No. P321-1B)

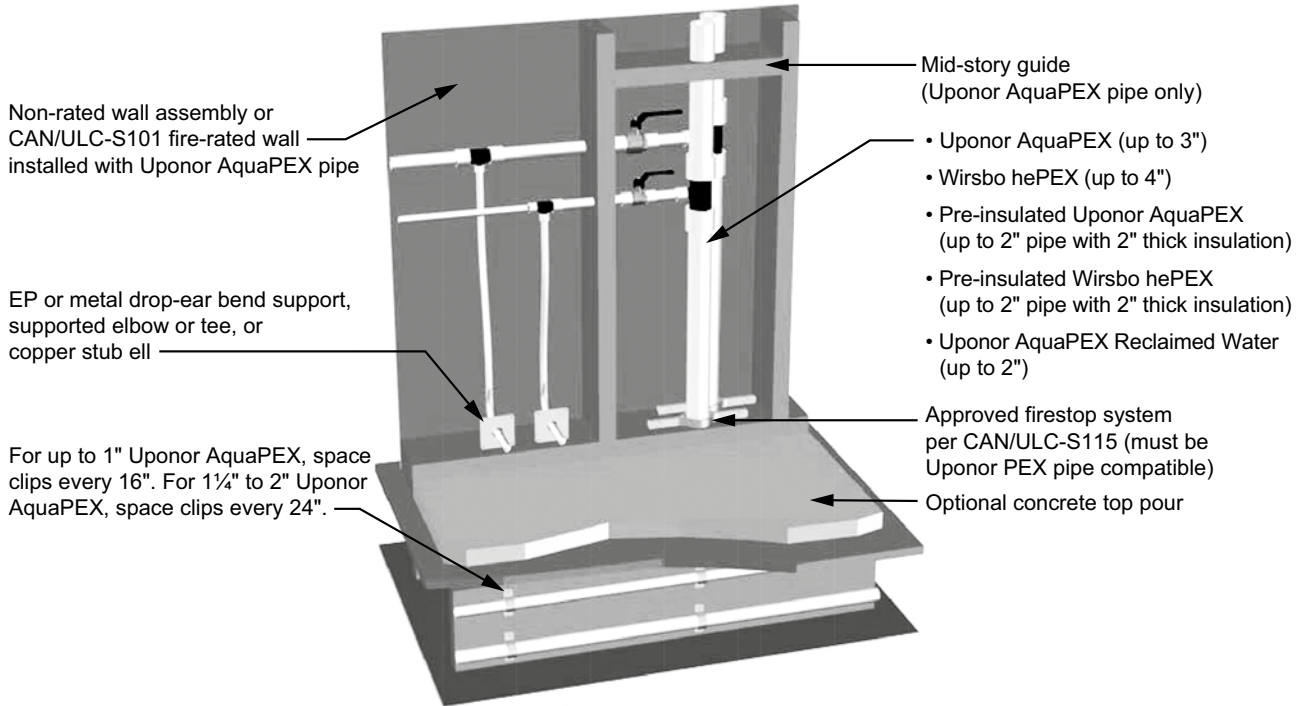


Figure 3-5: fixture detail 1



### Fixture detail 2

Wood-frame floor/ceiling assembly (ITS Design No. UW/FCA 60-01/QAI Design No. P321-1F)  
Wood-stud wall assembly (ITS Design No. UW/WA 60-02/QAI Design No. P321-1B)

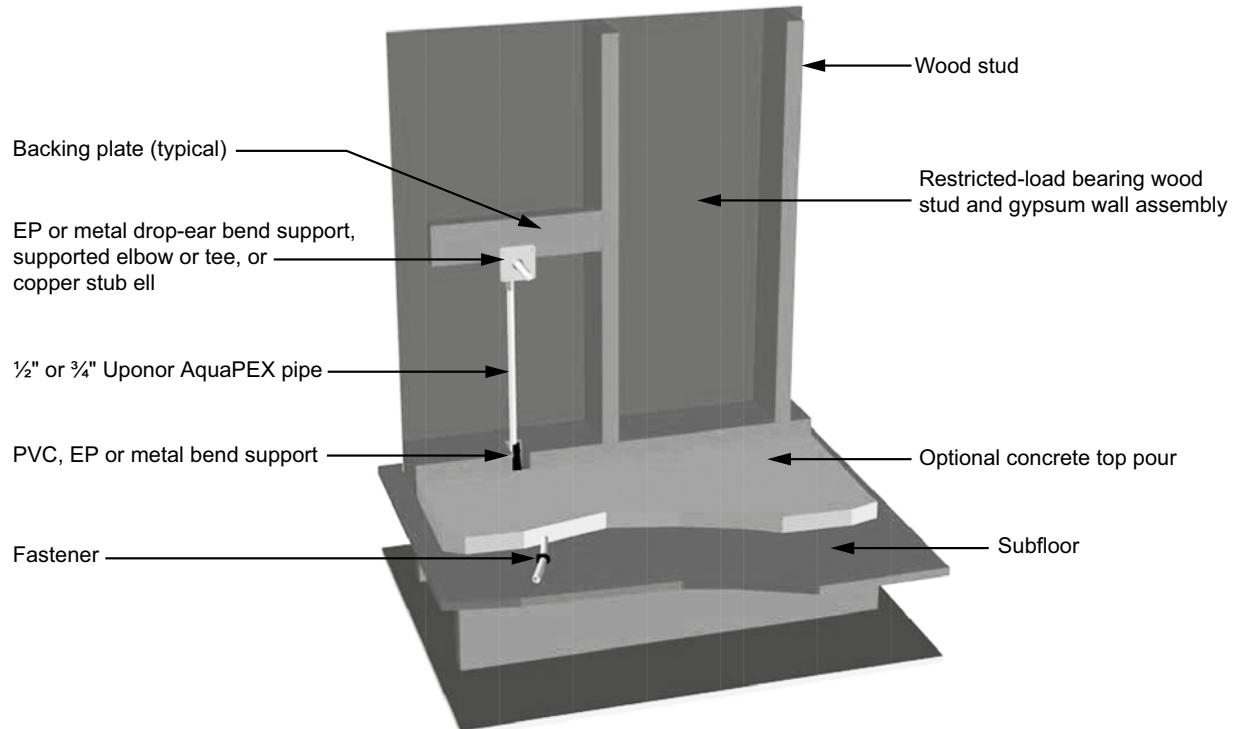



Figure 3-6: fixture detail 2



## Concrete assemblies (U.S.)

### Multiport tee detail

Concrete floor/ceiling assembly (UL Design No. K913/QAI Design No. P321-1D)  
Steel-stud wall assembly (UL Design No. V444/QAI Design No. P321-1A)

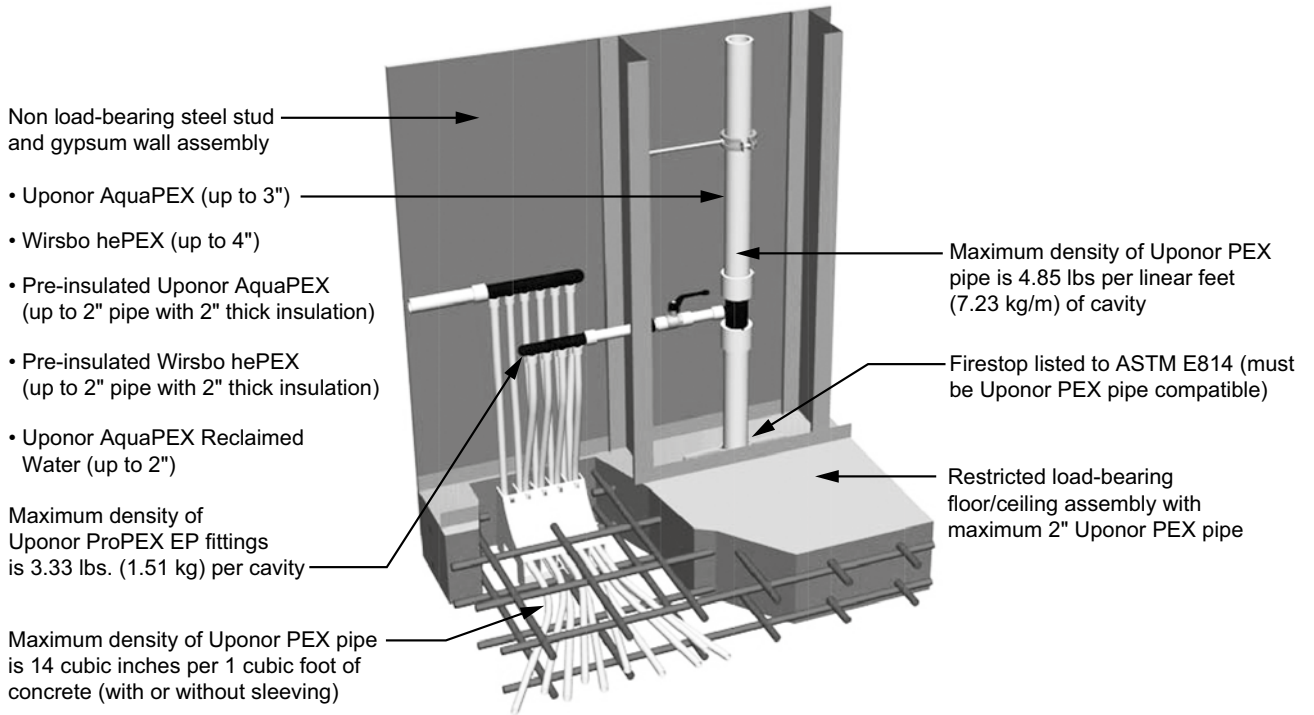


**Figure 3-7: Multiport tee detail**



### Fixture detail

Concrete floor/ceiling assembly (UL Design No. K913/QAI Design No. P321-1D)  
Steel-stud wall assembly (UL Design No. V444/QAI Design No. P321-1A)

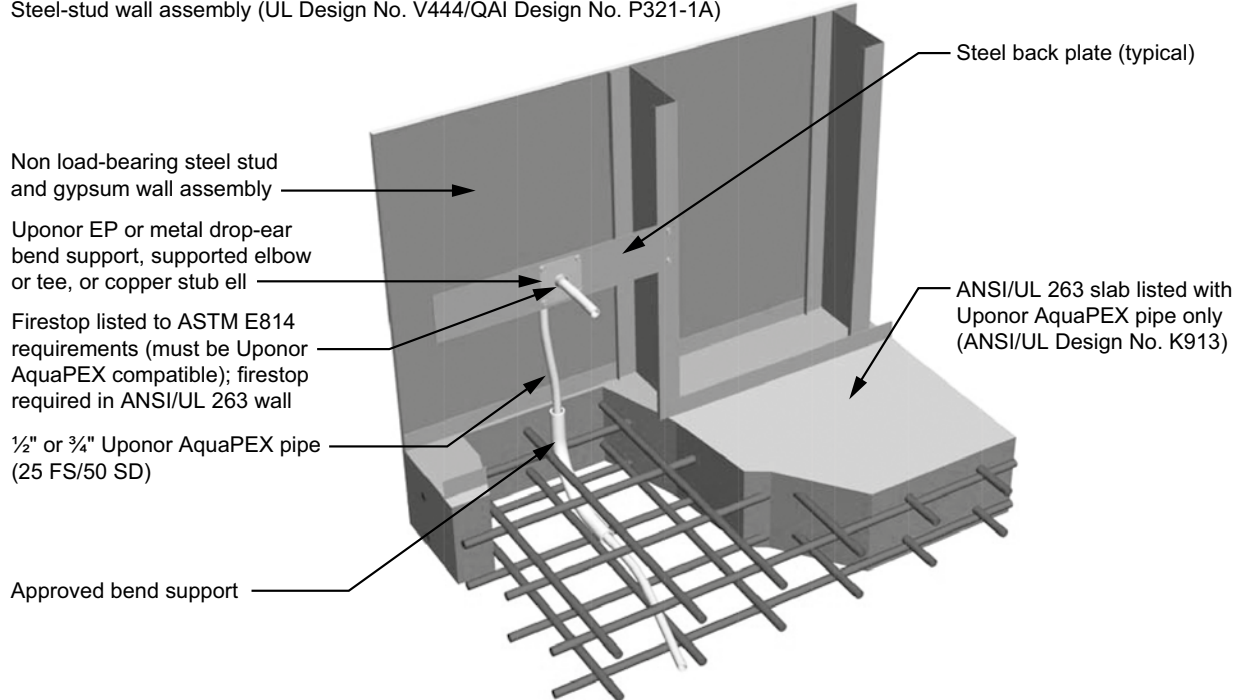


**Figure 3-8: Fixture detail**



## Concrete assemblies (Canada)

### Multiport tee detail

Concrete floor/ceiling assembly (ITS design no. UW/FCA 120-02/QAI design no. P321-1D)  
Steel-stud wall assembly (ITS design no. UW/WA 60-01/QAI design no. P321-1A)

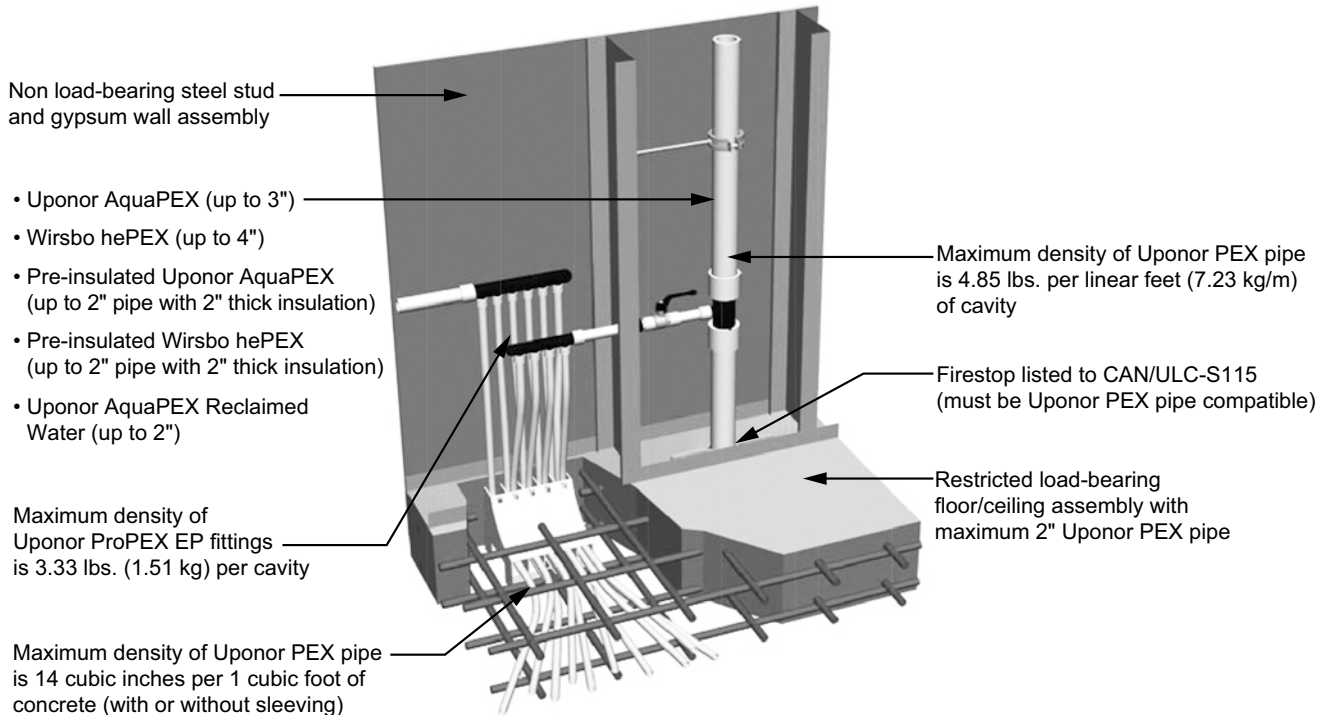


**Figure 3-9: Multiport tee detail**



### Fixture detail

Concrete floor/ceiling assembly (ITS design no. UW/FCA 120-02/QAI design no. P321-1D)  
Steel-stud wall assembly (ITS design no. UW/WA 60-01/QAI design no. P321-1A)

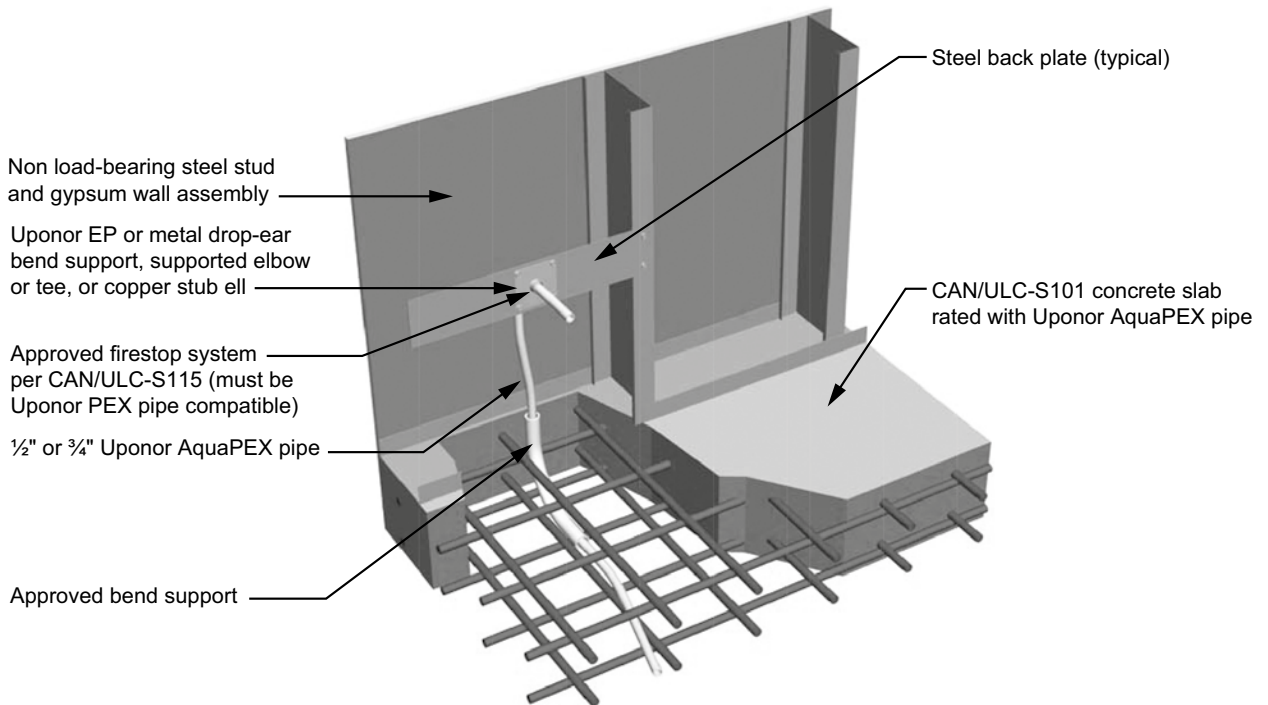

**Figure 3-10: Fixture detail**

## ASTM E814 or CAN/ULC-S115

Combustible and non-combustible pipes penetrating a wall or floor/ceiling fire-rated assembly must include a code-compliant means of passive fire protection. The function of a passive fire protection system, such as firestopping, is to contain the fire within the area in which it started by preventing the products of combustion (smoke, hot gasses and flames) from spreading throughout the structure.

Effective firestopping requires accurate adherence to a specific combination of conditions that have been tested and listed as a system per ASTM E814, CAN/ULC-S115 or ANSI/UL 1479. Listed firestop components include the penetrated substrates, penetrating item, penetration hole, insulating materials, sealants and installation method. Deviation from the listed fire assembly documentation severely compromises the effectiveness of the firestop system.

Fire assembly documentation and listings shall be obtained from the selected firestop solution manufacturer. Most of the firestop manufacturers have system selector tools or navigators on their websites to easily research and find a listing that matches the specified type of construction.

## Fire stopping solutions

There is a wide range of firestopping solutions that have been tested and listed with PEX pipe, including intumescent caulks, wrap strips, pass-through devices, collars and cast-in-place sleeves. Some firestop manufacturers include, but are not limited to, 3M™, Hilti®, RectorSeal®, Passive Fire Protection Partners, Specified Technologies Inc., Holdrite® and ProSet Systems®.

**Figure 3-11: UL online certifications directory**

**Figure 3-12: Select appropriate features**

The steps below show an example of how to research and find a listed firestop assembly for PEX pipe.

### Step one

Choose a firestop solution manufacturer and consult their website or search the **UL Online Certifications Directory** for applicable listings. (See **Figure 3-11**.)

### Step two

Select the desired and specified features of the through penetration system. Defining the country of use, assembly type, penetrating

item, firestopping product and F rating of the system may help refine search results. (See **Figure 3-12**.)

### Step three

Review the system matches for accuracy and consider all available options. In regards to fire listings for pressure pipe applications, domestic water piping (Division 22, Section 22 11 16) and hydronic piping (Division 23, Section 23 21 13) may be defined as being “closed” or “pressure” type systems. (See **Figure 3-13** on the following page.)

- WL2547
- 3M™ Fire Barrier Sealant CP 25WB+
- 1, 2 3M™ Fire Barrier Sealant IC 15WB+
- 3M™ Fire Barrier Water tight Sealant 3000 WT

UL

Max 2" SDR 9 PEX (closed only). U300, U400, or V400 series gypsum wallboard assemblies. Max. diameter of opening 1½" larger than OD of penetrant. Point contact to max. 1½" annular space. Concentric or eccentric installations. 1 & 2 hour F rating. No mineral wool required.

Figure 3-13: Search results

**Step four**

Ensure the selected fire assembly document matches:

- Type of construction
- F rating of assembly
- Through penetrant defined as crosslinked polyethylene pipe or PEX pipe

- Range of pipe size being installed
- Penetration hole size and shape
- Firestop solution availability (See Figures 3-14, 3-15 and 3-16.)

**Note:** It may be desirable to select a firestop product that can be used for other MEP system penetrations, such as drain, waste and vent (DWV) and conduit applications. This can help ease coordination on the jobsite during the firestop installation.

Refer to the respective firestop manufacturer for more information pertaining to the appropriate application of their products. Be mindful of information stated in the published listings to ensure compliance during installation.

**Note:** Ensure the required firestop material defined in the assembly (i.e., sealant) does not come into contact with Uponor EP fittings. Assemblies define the penetrating item as "PEX pipe" and therefore only PEX pipe shall come into contact with the required firestopping material.

System no. WL-2547  
August 04, 2009  
F Ratings – 1 and 2 Hr (See Item 1)  
T Ratings – 0 and 1-3/4 Hr (See Item 1)

SECTION A-A

1. **Wall assembly** — The 1 and 2 hr fire rated gypsum board/stud wall assemblies shall be constructed of the materials and in the manner specified in the individuals U300, U400 or V400 Series Wall and Partition Designs in the UL Fire Resistance Directory and shall include the following construction features:
  - A. **Studs** — Wall framing may consist of either wood studs or steel channel studs. Wood studs to consist of nom 2 by 4 in. (51 by 102 mm) lumber spaced 16 in. (406 mm) o.c. Steel studs to be min 3½ in. (89 mm) wide and spaced max 24 in. (610 mm) o.c.
  - B. **Gypsum Board\*** — Thickness, type, number of layers and fasteners as required in the individual Wall and Partition Design. Diameter of opening shall be 1½ in. (38 mm) larger than the outside diameter of tubing (Item 2).
- The hourly F Rating of the firestop system is equal to the hourly fire rating of the wall assembly in which it is installed. The hourly T Rating is 0 and 1-3/4 hr for 1 and 2 hr rated assemblies, respectively.
2. **Crosslink polyethylene (PEX) Tubing** — Nom 2 in. (51 mm) diam (or smaller) SDR 9 PEX tubing for use in closed (process or supply) piping system. Tubing installed concentrically or eccentrically within opening. Annular space between tubing and edge of opening to be min 0 in. to max 1½ in. (38 mm). Tubing to be rigidly supported on both sides of wall assembly.
3. **Fill, void or cavity materials\* — Caulk or Sealant** — Min ¼ in. (16 mm) thickness of fill material applied within the annulus, flush with both surfaces of wall assembly. An additional min ½ in. (13 mm) bead of fill material applied at the tubing/gypsum board interface at point contact location on both surfaces of wall assembly.

3M COMPANY  
3M FIRE PROTECTION PRODUCTS — CP 25WB+, IC 15WB+ or FB-3000 WT  
\*Bearing the UL Classification Mark

Reprinted from the online certification directory with permission from Underwriters Laboratories Inc.  
Copyright © 2010 Underwriters Laboratories Inc.®

3M Fire Protection Products  
3m.com/firestop
WL-2547 • 1 of 1
Product Support Line  
1-800-338-1447

Figure 3-14: Fire assembly document

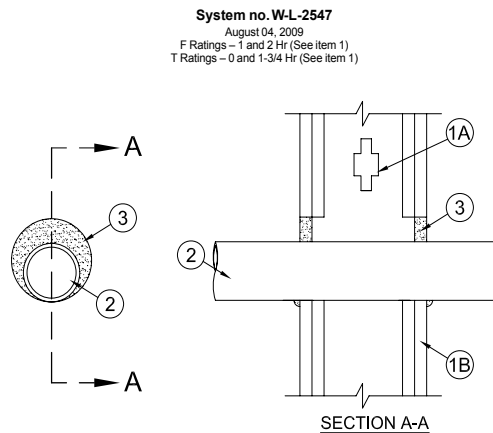


Figure 3-15: Assembly drawing

1. **Wall Assembly** — The 1 and 2 hr fire rated gypsum board/stud wall assemblies shall be constructed of the materials and in the manner specified in the individuals U300, U400 or V400 Series Wall and Partition Designs in the UL Fire Resistance Directory and shall include the following construction features:
  - A. **Studs** — Wall framing may consist of either wood studs or steel channel studs. Wood studs to consist of nom 2 by 4 in. (51mm by 102mm) lumber spaced 16 in. (406mm) o.c. Steel studs to be min 3½ in. (89mm) wide and spaced max 24 in. (610mm) o.c.
  - B. **Gypsum Board\*** — Thickness, type, number of layers and fasteners as required in the individuals Wall and Partition Design. Diameter of opening shall be 1½ in. (38mm) larger than the outside diameter of tubing (Items 2).

**The hourly F Rating of the firestop system is equal to the hourly fire rating of the wall assembly in which it is install. The hourly T Rating is 0 and 1¼ hr for 1 and 2 hr rated assemblies, respectively.**
2. **Crosslink Polyethylene (PEX) Tubing** — Nom 2 in. (51mm) diameter (or smaller) SDR9 PEX tubing for use in closed (process or supply) piping system. Tubing installed concentrically or eccentrically within opening. Annular space between tubing and edge of opening to be min 0 in. to max 1½ in. (38mm). Tubing to be rigidly supported on both sides of wall assembly.
3. **Fill, Void or Cavity Materials\* — Caulk or Sealant** — Min ¼ in. (16mm) thickness of fill materials applied within the annulus, flush with both surfaces of wall assembly. An additional min ½ in. (13 mm) bead of fill material applied at the tubing/gypsum board interface at point contact location on both surfaces of wall assembly.

**3M Company**  
**3M FIRE PROTECTION PRODUCTS — CP25WB+, IC15WB+ OR FB-3000WT**

\*Bearing the UL Classification Mark

Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc.  
Copyright © 2010 Underwriters Laboratories Inc.®

Figure 3-16: Assembly criteria



## ASTM E814 and CAN/ULC-S115 listings

■ = ASTM E814 and CAN/ULC-S115    ■ = ASTM E814 only

| Assembly types                  |        | Manufacturer |            |          |           |             |           |          |           |
|---------------------------------|--------|--------------|------------|----------|-----------|-------------|-----------|----------|-----------|
|                                 |        | 3M™          |            | Hilti®   |           | RectorSeal® |           | STI      |           |
|                                 |        | Wall         | Floor/clg  | Wall     | Floor/clg | Wall        | Floor/clg | Wall     | Floor/clg |
| Wood-stud/steel-stud assemblies | 1-hour | PHV-120-04   | F-C-2039   | W-L-2186 | F-C-2081  | W-L-2342    | F-C-2298  | F-C-2319 | F-C-2032  |
|                                 |        | PHV-120-11   | F-C-2240   | W-L-2235 | F-C-2230  | W-L-2262    | F-C-8015  | W-L-2100 | F-C-2252  |
|                                 |        | W-L-2091     | F-C-2343   | W-L-2466 | F-C-2310  | W-L-2373    | F-C-2329  | W-L-2144 | F-C-2319  |
|                                 |        | W-L-2146     | F-C-2344   | W-L-2474 | F-C-2334  | W-L-2430    | F-C-2212  | W-L-2241 | F-E-2003  |
|                                 |        | W-L-2173     | F-C-2391   | W-L-2480 | F-C-8038  | W-L-2526    | F-E-2007  | W-L-2242 | F-C-8021  |
|                                 |        | W-L-2448     | F-E-2002   | W-L-2537 | F-C-8044  | W-L-2121    | F-C-2221  | W-L-2423 | F-C-8029  |
|                                 |        | W-L-2483     | F-E-2012   | W-L-2467 |           | W-L-2209    | F-C-2385  | W-L-2508 | F-E-8003  |
|                                 |        | W-L-2543     | F-E-2040   | W-L-5224 |           | W-L-2528    |           | W-L-2548 | F-C-8045  |
|                                 |        | W-L-2547     | PHV-120-04 |          |           | W-L-2402    |           | W-L-2549 | F-E-8010  |
|                                 |        | W-L-2299     | PHV-120-11 |          |           | W-L-2638    |           | W-L-7193 |           |
|                                 |        | PV-60-02     |            |          |           | W-L-2639    |           | F-C-8021 |           |
|                                 |        |              |            |          |           | W-L-2007    |           | F-C-8029 |           |
|                                 |        |              |            |          |           | W-L-2170    |           | W-L-5290 |           |
|                                 |        |              |            |          |           | W-L-2287    |           | W-L-2631 |           |
|                                 |        |              |            |          | W-L-2457  |             |           |          |           |
|                                 |        |              |            |          | W-L-2524  |             |           |          |           |
|                                 |        |              |            |          | W-L-2594  |             |           |          |           |
|                                 |        |              |            |          | W-L-2595  |             |           |          |           |
|                                 | 2-hour | PHV-120-04   | PHV-120-04 | W-L-2186 | F-C-2081  | W-L-2342    | F-C-2221  | W-L-2100 |           |
|                                 |        | PHV-120-11   | PHV-120-11 | W-L-2235 | F-C-2310  | W-L-2262    | F-C-2385  | W-L-2144 |           |
|                                 |        | W-L-2090     |            | W-L-2466 |           | W-L-2373    |           | W-L-2241 |           |
|                                 |        | W-L-2091     |            | W-L-2474 |           | W-L-2430    |           | W-L-2242 |           |
|                                 |        | W-L-2146     |            | W-L-2480 |           | W-L-2526    |           | W-L-2423 |           |
|                                 |        | W-L-2448     |            | W-L-2537 |           | W-L-2121    |           | W-L-2508 |           |
|                                 |        | W-L-2483     |            | W-L-2467 |           | W-L-2209    |           | W-L-2548 |           |
|                                 |        | W-L-2543     |            | W-L-5224 |           | W-L-2528    |           | W-L-2549 |           |
| W-L-2547                        |        |              |            |          | W-L-2402  |             | W-L-7193  |          |           |
| W-L-2299                        |        |              |            |          | W-L-2638  |             | W-L-5290  |          |           |
|                                 |        |              |            |          | W-L-2639  |             | W-L-2631  |          |           |
|                                 |        |              |            |          | W-L-2170  |             |           |          |           |

**Table 3-2a: Fire assemblies per manufacturer**

**Note:** This table is not meant to address every compatible fire assembly or firestop manufacturer. It is the end user's responsibility to ensure that the fire assembly documentation being used is approved and current for the specific application. Please refer to the respective manufacturer's website for detailed listing information.

## ASTM E814 and CAN/ULC-S115 listings

■ = ASTM E814 and CAN/ULC-S115    ■ = ASTM E814 only

| Assembly types      | Manufacturer |            |            |           |             |           |           |           |           |          |
|---------------------|--------------|------------|------------|-----------|-------------|-----------|-----------|-----------|-----------|----------|
|                     | 3M™          |            | Hilti®     |           | RectorSeal® |           | STI       |           | HOLDRITE  |          |
|                     | Wall         | Floor/clg  | Wall       | Floor/clg | Wall        | Floor/clg | Wall      | Floor/clg | Floor/clg |          |
| Concrete assemblies | 1-hour       |            |            |           |             | C-AJ-2605 | C-AJ-2605 |           |           |          |
|                     |              | C-AJ-2510  | C-AJ-2510  | C-AJ-2170 | C-AJ-2170   | W-J-2162  | C-AJ-2628 | W-J-2021  | C-AJ-2031 | F-A-2188 |
|                     |              | C-AJ-2536  | C-AJ-2536  | C-AJ-2407 | C-AJ-2407   | W-J-2122  | F-A-2171  | W-J-2043  | C-AJ-2140 | F-A-2221 |
|                     |              | PHV-120-04 | F-A-2115   | C-AJ-2647 | C-AJ-2647   | W-J-2180  | C-AJ-2701 | W-J-2076  | C-AJ-2291 | F-B-2042 |
|                     |              | PHV-120-11 | PH-120-10  | W-J-2207  | C-AJ-2674   | W-J-2025  | C-AJ-2176 | W-J-2077  | F-A-2186  | F-A-2269 |
|                     |              | C-AJ-2213  | PHV-120-04 | W-J-2229  | F-B-2040    | C-AJ-2628 | F-A-2235  | W-J-2232  | F-A-2224  | F-A-2222 |
|                     |              | C-AJ-2378  | PHV-120-11 | W-J-2206  | F-B-2041    | C-AJ-2679 | F-A-2237  | W-J-2233  | F-A-2225  | F-A-2037 |
|                     |              | W-J-2231   | C-AJ-2076  | W-J-5122  | F-A-2142    | C-AJ-2701 | C-AJ-2494 | W-J-5148  | C-AJ-2586 |          |
|                     |              | W-J-2110   | C-AJ-2213  |           | W-J-2071    | W-J-2295  | C-AJ-2679 | C-AJ-2586 | C-AJ-5345 |          |
|                     |              | C-AJ-2213  | C-AJ-2378  |           |             | W-J-2296  | C-AJ-2702 | C-AJ-5345 | C-BJ-2046 |          |
|                     | 2-hour       | C-AJ-2378  | C-AJ-2213  |           |             | C-AJ-2702 |           | C-BJ-2046 |           |          |
|                     |              | C-AJ-2738  | C-AJ-2378  |           |             | C-AJ-2176 |           | W-J-2291  |           |          |
|                     |              | PHV-120-12 | C-AJ-2738  |           |             | C-AJ-2494 |           |           |           |          |
|                     |              | C-AJ-2698  | PHV-120-12 |           |             | W-J-2035  |           |           |           |          |
|                     |              |            | C-AJ-2698  |           |             | W-J-2051  |           |           |           |          |
|                     |              |            |            |           |             | W-J-2142  |           |           |           |          |
|                     |              |            |            |           |             | W-J-2197  |           |           |           |          |
|                     |              |            |            |           |             | W-J-2220  |           |           |           |          |
|                     |              |            |            |           |             | W-J-2222  |           |           |           |          |
|                     |              |            |            |           |             | W-J-2224  |           |           |           |          |
|                     |              |            |            |           |             | W-J-2266  |           |           |           |          |
|                     | 3-hour       |            |            | C-BJ-2028 | C-BJ-2028   | C-AJ-2119 | C-AJ-2119 | C-AJ-2671 | C-AJ-2671 | F-A-2176 |
|                     |              |            |            | C-BJ-2040 | C-BJ-2040   | C-AJ-2194 | C-AJ-2194 | C-AJ-5344 | C-AJ-5344 | F-A-2221 |
|                     |              |            |            | C-BJ-2041 | C-BJ-2041   | C-AJ-2622 | C-AJ-2622 | C-AJ-5346 | C-AJ-5346 | F-B-2042 |
|                     |              |            |            |           |             |           |           |           | C-AJ-2578 | F-A-2269 |
|                     |              |            |            |           |             |           |           |           | F-A-2203  | F-A-8034 |
|                     |              |            |            |           |             |           |           |           | F-A-2204  | F-A-2222 |

**Table 3-2b: Fire assemblies per manufacturer**

**Note:** This table is not meant to address every compatible fire assembly or firestop manufacturer. It is the end user's responsibility to ensure that the fire assembly documentation being used is approved and current for the specific application. Please refer to the respective manufacturer's website for detailed listing information.

### Cast-in-place sleeves

Several manufacturers offer cast-in-place sleeves, which provide floor/ceiling penetrations in concrete slab applications. Some manufactures include:

- Holdrite
- ProSet Systems
- Hilti
- HydroFlame

Refer to the respective manufacturer's website for detailed product information.



**Figure 3-17: Cast-in-place sleeves**



**ASTM E84**  
— surface  
burning  
characteristics

As defined by the International Building Code (IBC), combustible piping may be installed in areas required to be of noncombustible construction, provided the piping is installed in a wall or concrete-floor slab or the pipe has a flame-spread (FS) index rating of not more than 25 and a smoke-developed (SD) index rating of not more than 50 when tested in accordance with ASTM E84.

Uponor PEX-a piping systems comprised of Uponor PEX-a piping, Uponor ProPEX rings, Uponor EP fittings, Uponor LF brass fittings and Uponor PEX-a Pipe Support products are listed for installation in return-air plenums as tested in accordance with ASTM E84.

The below listings apply to Uponor PEX-a piping systems installed in either horizontal or vertical orientations in the field. Refer to **Table 3-3** for installation requirements.

**QAI P321-1**  
**½" to ¾" Uponor PEX-a (uninsulated)**

Adjacent runs of uninsulated ½" to ¾" Uponor PEX-a piping in a return-air plenum must be separated by 18".

**QAI P321-2**  
**Up to and Including 3" Uponor PEX-a Supported with Uponor PEX-a Pipe Support**

See **Chapter 6** for installation details. Uponor PEX-a piping manufactured with a maximum nominal outside diameter (OD) of 3" and supported with Uponor PEX-a Pipe Support.

Pipe or fitting sections without PEX-a Pipe Support must be covered with a rated insulation per **Table 3-5**. There is no minimum length of PEX-a Pipe Support segments. There are also no spacing limitations between adjacent runs of this pipe.


**QAI P321-1**  
**Up to and Including 3" Uponor PEX-a (insulated)**

Uponor PEX-a piping manufactured with a maximum nominal OD of 3" and encased in a minimum ½" thick insulation in accordance with **Table 3-5** shall have no limitation on spacing.

**Classified as to surface burning characteristics**

| ASTM E84  | Flame spread | Smoke developed | Limitations   |
|---|--------------|-----------------|---|
| Nominal ½" to ¾" size   | 25 or less   | 50 or less      | Adjacent pipe runs shall be located at least 18" apart.   |
| 3" maximum nominal size Uponor PEX-a Supported with Uponor PEX-a Pipe Support | 25 or less   | 50 or less      | Pipe or fitting sections without PEX-a Pipe Support must be covered with a rated insulation per <b>Table 3-5</b> . There is no minimum length of PEX-a Pipe Support segments. |
| 3" maximum nominal size Uponor PEX-a with ½" insulation                       | 25 or less   | 50 or less      | ½" minimum thickness insulation as specified in <b>Table 3-5</b> .  |


**Table 3-3: Uponor AquaPEX ASTM E84 requirements**

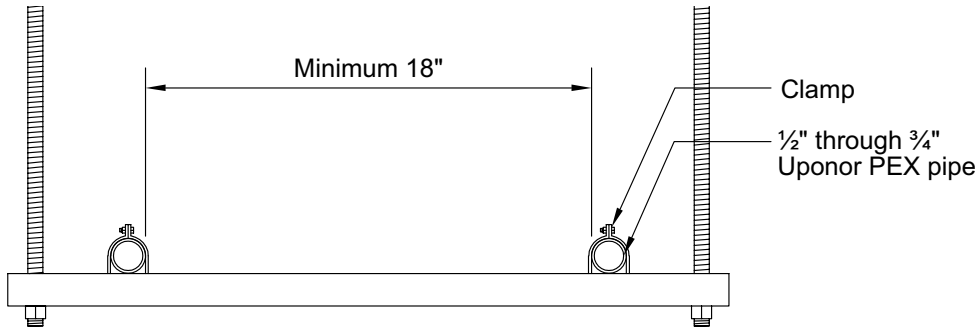

**Figure 3-18: QAI P321-1**

Guidelines:  $\frac{1}{2}$ " through  $\frac{3}{4}$ " (uninsulated)


Limitations: Adjacent runs shall be located at least 18" apart.

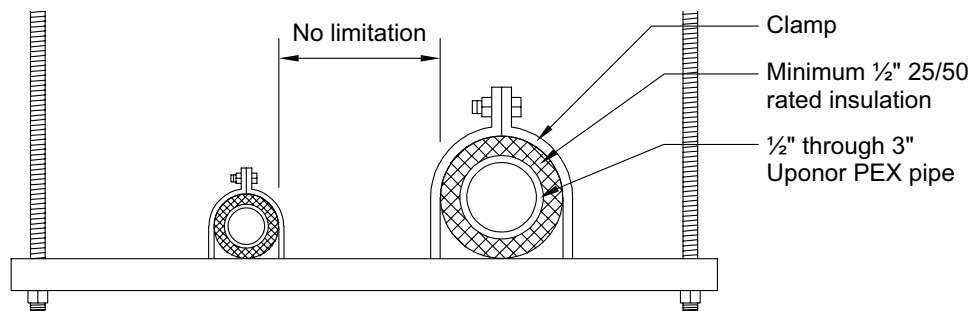

**Figure 3-19: QAI P321-1**

Guidelines:  $\frac{1}{2}$ " through 3" (uninsulated)

Limitations:  $\frac{1}{2}$ " minimum thickness insulation as specified in **Table 3-3**.

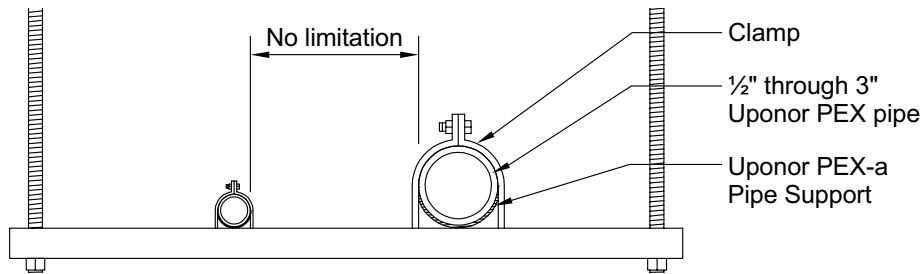

**Figure 3-20: QAI P321-2**

Guidelines:  $\frac{1}{2}$ " through 3" (PEX-a pipe support)

Pipe or fitting sections without PEX-a pipe support must be covered with a rated insulation per **Table 3-5**.

There is no minimum length of PEX-a pipe support segments.



**CAN/  
ULC-S102.2**  
— surface

**burning characteristics**

As defined by the National Building Code of Canada (NBCC), combustible piping may be installed in areas required to be of noncombustible construction, provided the piping is installed in a wall or concrete-floor slab or the pipe has a flame-spread (FS) index rating of not more than 25 and a smoke-developed (SD) index rating of not more than 50 when tested in accordance with CAN/ULC-S102.2.

Uponor PEX-a piping systems comprised of Uponor PEX-a piping, Uponor ProPEX rings, Uponor EP fittings, Uponor LF brass fittings and Uponor PEX-a pipe support products are listed for installation in return-air plenums as tested in accordance with CAN/ULC-S102.2.

The below listings apply to Uponor PEX-a piping systems installed in either horizontal or vertical orientations in the field. Refer to **Table 3-4** for installation requirements.

**QAI P321-1**

**½" Uponor PEX-a (Uninsulated)**

Adjacent runs of un-insulated ½" Uponor PEX-a piping in a return-air plenum have no spacing limitations.

**¾" and 1" Uponor PEX-a (Uninsulated)**

Adjacent runs of uninsulated ¾" and 1" Uponor PEX-a piping must be separated by 18".

**QAI P321-1**

**Up to and including 3" Uponor PEX (insulated)**

Uponor PEX piping manufactured with a maximum nominal OD of 3" and encased in ½" insulation in accordance with **Table 3-5** shall have no limitation on spacing.


**QAI P321-3**

**Up to and Including 2" Uponor PEX-a (Water-filled, Uninsulated)**

Adjacent runs of water-filled, uninsulated piping in a return-air plenum have a no spacing limitations.

| Classified as to surface burning characteristics        |              |                 |  |
|---|--------------|-----------------|--|
| CAN/ULC S102.2  | Flame spread | Smoke developed | Limitations  |
| ½" nominal size   | 25 or less   | 50 or less      | No spacing limitations.  |
| ¾" and 1" nominal sizes                                 | 25 or less   | 50 or less      | Adjacent pipe runs shall be located at least 18" apart.            |
| 2" maximum nominal size (water-filled)                  | 25 or less   | 50 or less      | No spacing limitations.  |
| 3" maximum nominal size Uponor PEX-a with ½" insulation | 25 or less   | 50 or less      | ½" minimum thickness insulation as specified in <b>Table 3-5</b> . |


**Table 3-4: Uponor AquaPEX CAN/ULC-S102.2 requirements**

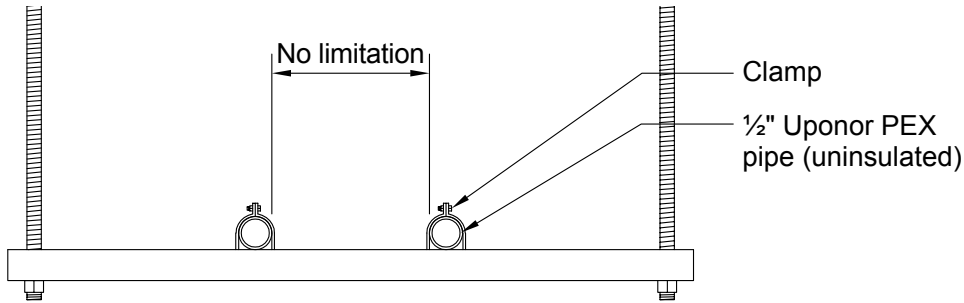

**Figure 3-21: QAI P321-1**

Guidelines: 1/2" (uninsulated)


Limitations: No spacing limitations.

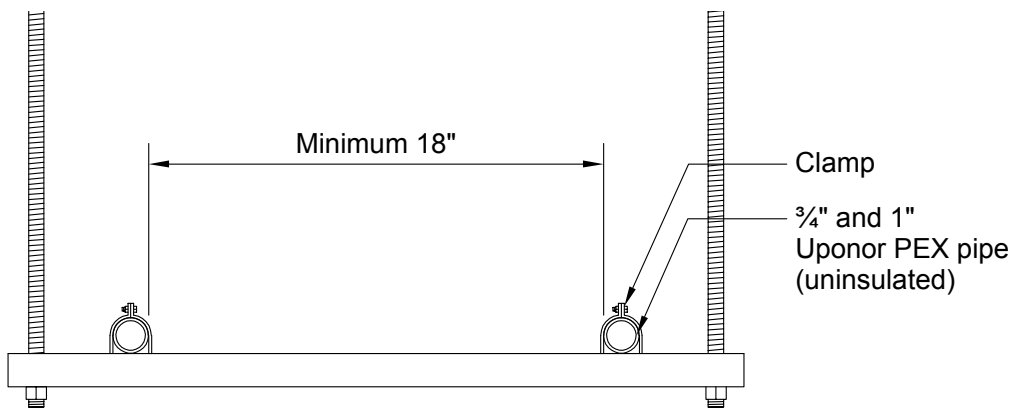

**Figure 3-22: QAI P321-1**

Guidelines: 3/4" and 1" (uninsulated)


Limitations: Adjacent pipe runs shall be located at least 18" apart.

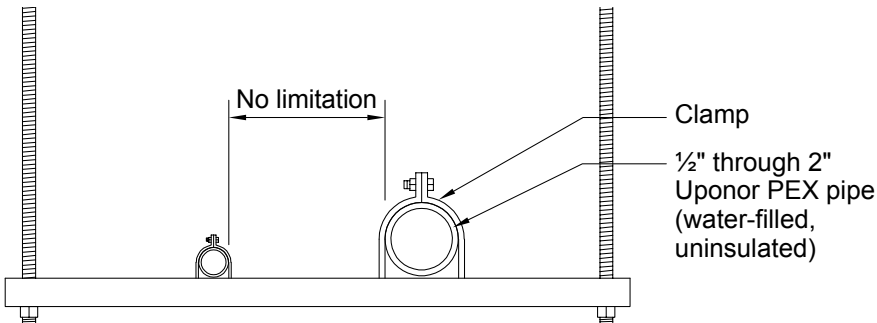

**Figure 3-23: QAI P321-3**

Guidelines: 1/2" through 2" (water-filled)

Limitations: No spacing limitations

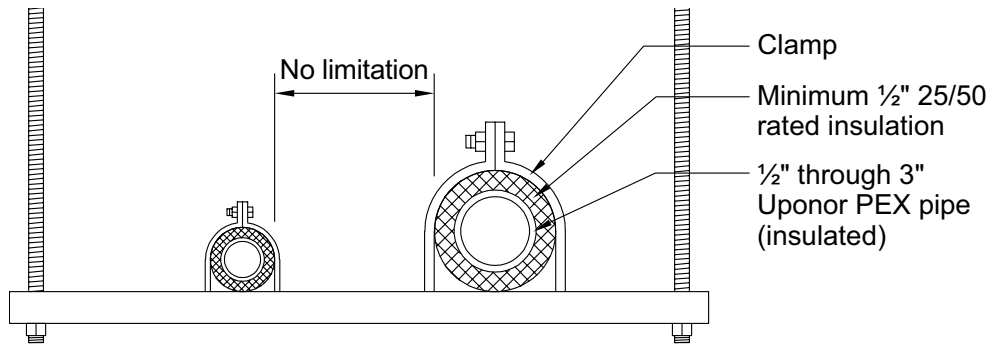

**Figure 3-24: QAI P321-1**

Guidelines: 1/2" through 3" (insulated)

Limitations: 1/2" minimum thickness insulation as specified in **Table 3-5**

## Underwriters Laboratories (UL) 2846

Until recently, piping materials were to be tested under the ASTM E84 method, which was originally developed to test building construction components. The UL 2846 test method was developed specifically for plastic piping materials to test flame and smoke development.

Uponor PEX piping (up to 4") carries the UL 2846 *Standard for Fire Test of Plastic Water Distribution Plumbing Pipe for Visible Flame and Smoke Characteristics*.

Approved Uponor PEX pipes include:

- Uponor AquaPEX (up to 3")
- Wirsbo hePEX (up to 4")

## Installation criteria

Piping must be covered with a minimum ½" thick, UL-classified pipe and equipment covering material as described on the marking.

Specifications for pipe insulations in ASTM E84 and CAN/ULC-S102.2 applications

| Products<br>(minimum thickness)                        | ASTM E84 and CAN/ULC-S102.2 |                 | Density of insulation |
|--|-----------------------------|-----------------|-----------------------|
|  | Flame spread                | Smoke developed |                       |
| ½" Manson Alley-K Fiberglass Pipe Insulation           | 25 or less                  | 50 or less      | 4.0 pcf               |
| ½" Armaflex Composite Pipe Insulation                  | 25 or less                  | 50 or less      | 3.0 pcf               |
| ½" Johns Manville Micro-Lok Fiberglass Pipe Insulation | 25 or less                  | 50 or less      | 3.3 pcf               |
| ½" Johns Manville Micro-Lok HP                         | 25 or less                  | 50 or less      | 3.5 pcf               |
| ½" Owens Corning VaporWick Pipe Insulation             | 25 or less                  | 50 or less      | 4.0 pcf               |
| ½" Owens Corning Fiberglass Pipe Insulation            | 25 or less                  | 50 or less      | 3.5 pcf               |
| ½" Knauf Earthwool Redi-Klad Pipe Insulation           | 25 or less                  | 50 or less      | 3.8 pcf               |
| ½" GLT Pipe and Tank Insulation                        | 25 or less                  | 50 or less      | 4.5 pcf               |
| ½" Nomalock Pipe Insulation*                           | 25 or less                  | 50 or less      | 4.0 pcf               |

**Table 3-5: Specifications for pipe insulations in ASTM E84 and CAN/ULC-S102.2 applications**

\*Check the rated grade of Nomalock insulations for plenum use.



## Chapter 4: Pipe sizing

### Standard dimension ratio


Standard dimension ratio (SDR) is a term used in describing the size of PEX piping — it is the conceptual equivalent of a pipe schedule. Dimension ratio (DR) is the average outside diameter (OD) of PEX piping divided by its minimum wall thickness.

### Temperature and pressure ratings

Temperature and pressure ratings for PEX piping are determined by the Plastics Pipe Institute (PPI) as required by the ASTM F876 standard. The minimum burst pressure per F876 is 480 psi at 73°F (22.7°C) for ½" PEX and 475 psi at 73°F (22.7°C) for ¾" and larger PEX.

Note that Uponor PEX pipe can withstand burst pressures up to 800 psi at 73°F (22.7°C) without failure, so designers can feel comfortable designing Uponor PEX pipe up to its maximum temperature and pressure limits.

To start the evaluation, pipes of all sizes are empirically tested to ASTM D2837 to determine the hydrostatic design basis (HDB); this test method is used for all polyethylene-based piping. That data is then multiplied by 0.5 design factor to determine the hydrostatic design stress (HDS). The HDS is then run through an ISO equation (ISO R-161-1690) to determine the temperature and pressure limits of the pipe.



ISO Equation 2S/P = R-1  
Where S = HDS, P = psi, R = SDR

### Pipe sizing an Uponor AquaPEX plumbing system

Uponor AquaPEX pipe is manufactured to have an outside diameter (OD) equal to copper tube size (CTS) dimensions and a wall thickness with a standard dimension ratio (SDR) of 9 (i.e., wall thickness is one-ninth the pipe OD).

Due to the thickness of PEX, which provides superior insulation and durability characteristics, the inside diameter (ID) of Uponor


| ASTM F876 temperature and pressure ratings for SDR9 PEX |                                 |                                 |
|---|---------------------------------|---------------------------------|
| Rated temperature (°F)                                  | Hydrostatic design stress (psi) | Pressure rating for water (psi) |
| 73.4  | 630                             | 160                             |
| 180   | 400                             | 100                             |
| 200   | 315                             | 80                              |

Table 4-1: ASTM F876 temperature and pressure ratings for SDR9 PEX

AquaPEX pipe is slightly smaller than that of copper pipe. However, Uponor PEX is three times smoother than new copper pipe. This smoothness means it can be designed at higher velocities, thus reducing the difference in flow characteristics between PEX-a and copper (resulting from PEX-a's smaller ID).

To calculate pressure loss for an Uponor AquaPEX plumbing system, refer to the **Uponor PEX friction loss tables** in **Appendix B** or online at [uponorpro.com](http://uponorpro.com) in Technical Support/Manuals/Plumbing.



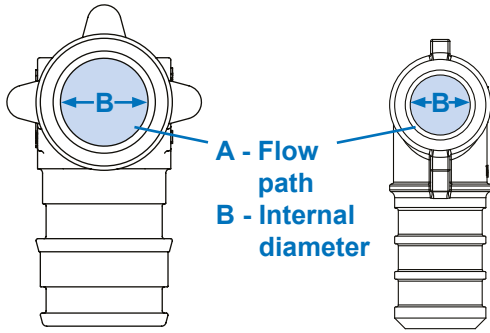

A - Flow path  
B - Internal diameter

**29% LARGER I.D.**  
**70% GREATER flow<sup>1</sup>**

<sup>1</sup>When comparing 1" F1960 EP with F2159 plastic fittings.

**ProPEX ASTM F1960  
and CAN/CSA B137.5  
expansion fitting**

**ASTM F1807/F2159  
insert fitting**

|                                      |        | Uponor ProPEX cold-expansion fitting                                  |  | Standard insert (crimp) fitting                                     |  |
|--------------------------------------|--------|---|--|---|--|
|                                      |        | ASTM F1960 brass  | ASTM F1960 EP  | ASTM F1807 brass  | ASTM F2159 plastic   |
| A<br>Flow path                       | 1/2"   | 0.112 sq. inches<br>2.8 gpm @ 8 ft./sec.<br>4.2 gpm @ 12 ft./sec.     | 0.116 sq. inches<br>2.9 gpm @ 8 ft./sec.<br>4.4 gpm @ 12 ft./sec.    | 0.096 sq. inches<br>2.4 gpm @ 8 ft./sec.<br>3.6 gpm @ 12 ft./sec.   | 0.078 sq. inches<br>1.9 gpm @ 8 ft./sec.<br>2.9 gpm @ 12 ft./sec.  |
|                                      | 3/4"   | 0.278 sq. inches<br>6.9 gpm @ 8 ft./sec.<br>10.4 gpm @ 12 ft./sec.    | 0.273 sq. inches<br>6.8 gpm @ 8 ft./sec.<br>10.2 gpm @ 12 ft./sec.   | 0.221 sq. inches<br>5.5 gpm @ 8 ft./sec.<br>8.3 gpm @ 12 ft./sec.   | 0.166 sq. inches<br>4.1 gpm @ 8 ft./sec.<br>6.2 gpm @ 12 ft./sec.  |
|                                      | 1"     | 0.496 sq. inches<br>12.4 gpm @ 8 ft./sec.<br>18.6 gpm @ 12 ft./sec.   | 0.488 sq. inches<br>12.2 gpm @ 8 ft./sec.<br>18.2 gpm @ 12 ft./sec.  | 0.396 sq. inches<br>9.9 gpm @ 8 ft./sec.<br>14.8 gpm @ 12 ft./sec.  | 0.292 sq. inches<br>7.3 gpm @ 8 ft./sec.<br>10.9 gpm @ 12 ft./sec. |
|                                      | 1 1/4" | 0.724 sq. inches<br>21.8 gpm @ 8 ft./sec.<br>32.6 gpm @ 12 ft./sec.   | 0.739 sq. inches<br>18.4 gpm @ 8 ft./sec.<br>27.6 gpm @ 12 ft./sec.  | 0.595 sq. inches<br>14.8 gpm @ 8 ft./sec.<br>22.2 gpm @ 12 ft./sec. | Not available  |
|                                      | 1 1/2" | 0.923 sq. inches<br>23.0 gpm @ 8 ft./sec.<br>34.5 gpm @ 12 ft./sec.   | 0.923 sq. inches<br>23.0 gpm @ 8 ft./sec.<br>34.5 gpm @ 12 ft./sec.  | 0.817 sq. inches<br>20.4 gpm @ 8 ft./sec.<br>30.6 gpm @ 12 ft./sec. | Not available  |
|                                      | 2"     | 1.877 sq. inches<br>47.1 gpm @ 8 ft./sec.<br>70.6 gpm @ 12 ft./sec.   | 1.730 sq. inches<br>43.1 gpm @ 8 ft./sec.<br>64.7 gpm @ 12 ft./sec.  | 1.463 sq. inches<br>36.5 gpm @ 8 ft./sec.<br>54.7 gpm @ 12 ft./sec. | Not available  |
|                                      | 2 1/2" | 3.110 sq. inches<br>77.6 gpm @ 8 ft./sec.<br>116.3 gpm @ 12 ft./sec.  | 2.688 sq. inches<br>67.0 gpm @ 8 ft./sec.<br>100.6 gpm @ 12 ft./sec. | Not available   | Not available  |
|                                      | 3"     | 4.562 sq. inches<br>113.8 gpm @ 8 ft./sec.<br>170.6 gpm @ 12 ft./sec. | 3.871 sq. inches<br>96.5 gpm @ 8 ft./sec.<br>144.8 gpm @ 12 ft./sec. | Not available   | Not available  |
| B<br>Minimum<br>internal<br>diameter | 1/2"   | 0.378"  | 0.385"   | 0.350"  | 0.315"   |
|                                      | 3/4"   | 0.595"  | 0.590"   | 0.530"  | 0.460"   |
|                                      | 1"     | 0.795"  | 0.788"   | 0.710"  | 0.610"   |
|                                      | 1 1/4" | 0.960"  | 0.970"   | 0.870"  | Not available  |
|                                      | 1 1/2" | 1.084"  | 1.084"   | 1.020"  | Not available  |
|                                      | 2"     | 1.550"  | 1.484"   | 1.365"  | Not available  |
|                                      | 2 1/2" | 1.990"  | 1.850"   | Not available   | Not available  |
|                                      | 3"     | 2.410"  | 2.220"   | Not available   | Not available  |

**Table 4-2: Uponor ProPEX fittings vs. standard insert (crimp) fittings**

**Note:** Refer to **Table C-1** in **Appendix C** for an equivalent length comparison.



### U.S. pipe sizing

For sizing an Uponor AquaPEX plumbing system in residential and light commercial buildings in the U.S., use the fixture unit tables for determining pipe size as published in the model plumbing codes.

To support this pipe sizing practice, Uponor consulted with the International Code Council (ICC) and the International Association of Plumbing and Mechanical Officials (IAPMO) by means of an evaluation report (ER) to substantiate their approvals.

The following ER numbers endorse the use of the 2012 UPC Table 610.4 (see **page 44**) (or 2009-prior UPC Table 6-6) and 2015-prior IPC Table E201.1 (see **pages 45-46**) for pipe sizing an Uponor AquaPEX plumbing system.

- IAPMO ER-0253
- ICC ES PMG 1006



### Canada pipe sizing

For sizing an Uponor AquaPEX plumbing system in residential high-rise and small commercial buildings in Canada, use **Table A-2.6.3.1.(2)A** (see **page 47**) and other applicable sections within the 2015 National Plumbing Code of Canada (NPCC).

### Uniform friction loss method

For larger systems, the most common method of pipe sizing is the uniform friction loss method. This method utilizes the pipe material's specific flow characteristics in conjunction with velocity sizing criteria (see **Appendix B** for Uponor PEX friction loss tables).

The following examples illustrate how to employ the uniform friction loss method.

To simplify the uniform friction loss method when sizing an Uponor AquaPEX plumbing system, use Uponor's pipe sizing calculator at [uponorpro.com/calculator](http://uponorpro.com/calculator).

### Step one

Perform a building water supply calculation to determine how much pressure is available for friction loss through the pipe and fittings. (See **Figure 4-1**.)

Designer must know the following:

- Pressure available at building (minimum static pressure available before water meter or after hydro-pneumatic tank/booster-pump system)
- Minimum fixture working pressure (minimum pressure required at farthest fixture outlet)

**Note:** Be sure to select the most demanding fixture in the farthest fixture group (i.e., bathtub). Refer to local code for minimum fixture working pressure.

- Static loss (height in feet of the highest fixture outlet above the supply source)
- Additional component loss (total pressure loss in psi of the following system components — water meter, filters, softeners, backflow prevention devices and pressure regulators)

### Step two

Calculate the total developed length (TDL) of the system and divide the available pressure for friction loss (calculated in **Figure 4-1**) by the TDL to determine the friction loss per foot or per 100 feet of pipe. (See **Figure 4-2**.)

Designer must know the following:

- Longest run to fixture (total linear feet of piping from water meter or supply source to the most hydraulically demanding fixture)
- Fitting allowance (percentage of longest run piping that represents friction loss through fittings and valves along the critical path, typically between 20 and 50 percent for an Uponor AquaPEX system)

**Note:** Alternatively, the designer can add up equivalent-length losses of fittings and valves along the critical path and add to the longest run footage.

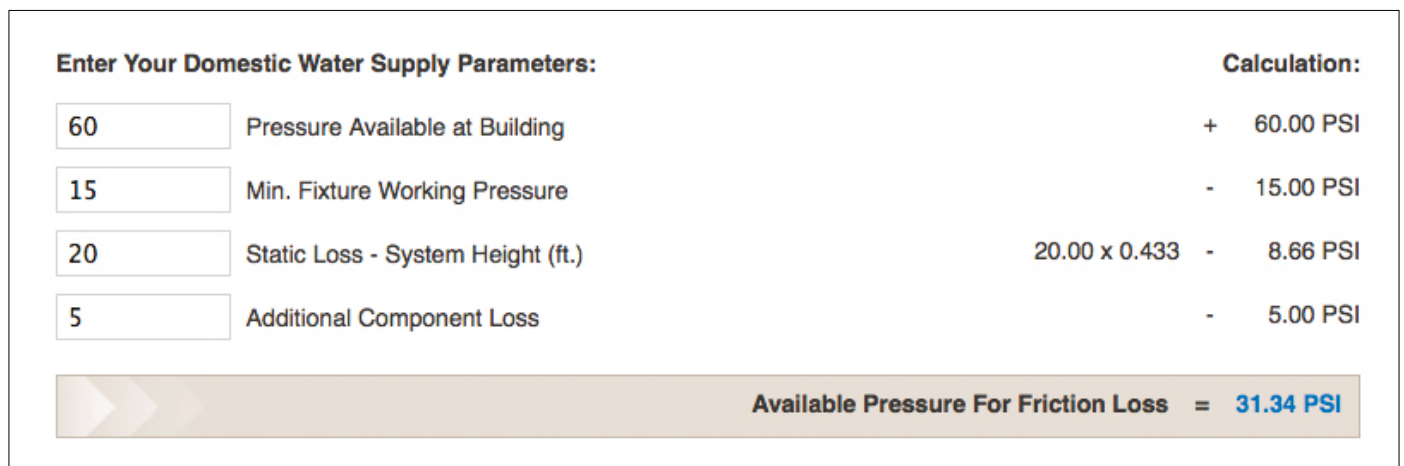


Figure 4-1: Building water supply calculation

### Step three

Develop water size charts for each pipe material and water temperature. (See **Figures 4-3** and **4-4**.)

Designer must know the following:

- Pipe materials being designed and range of sizes for each system
- Supply and return design water temperatures

**Note:** For commercial systems, size domestic hot-water return piping per the requirements stated in ASPE Plumbing Engineering Design Handbook, Volume 2, *Plumbing Systems*

- Maximum velocity of each pipe material per water temperature

- Table approved by the local authority having jurisdiction (AHJ) or referenced plumbing code table for converting gallons per minute (gpm) to water supply fixture units (WSFU)
- If the domestic cold-water system demand is predominately flush valve or flush tank WSFU

### Step four

Apply the appropriate water size chart to the plumbing design. Calculate WSFU demand per pipe segment by adding all the WSFUs of the fixtures being supplied by that pipe segment. (See **Figure 4-5**.)

| Enter Your Piping Supply Information: |                                       | Calculation:  |
|---------------------------------------|---------------------------------------|---|
| <input type="text" value="250"/>      | Longest Run to Fixture (ft.)          | + 250.00 FT   |
| <input type="text" value="25"/>       | Fitting Allowance (% of number above) | + 62.50 FT  |
|                                       |                                       | <b>Total Developed Length = 312.50 FT</b>   |
|                                       |                                       | <b>Friction Loss Rate Per Foot (Friction Loss / TDL) = 0.100 PSI/FT</b>               |
|                                       |                                       | <b>Friction Loss Rate per 100 Feet (Friction Loss / TDL * 100) = 10.028 PSI/100FT</b> |

Figure 4-2: Determine the friction loss per foot (or per 100 feet) of pipe

| Enter Your System Parameters for Each Table: |                                  |                                  |   |
|--|----------------------------------|----------------------------------|---|
| A  | B                                | C                                |   |
| <input type="text" value="60"/>              | <input type="text" value="120"/> | <input type="text" value="110"/> | Water Size Table Temperature (°F)       |
| <input type="text" value="10"/>              | <input type="text" value="8"/>   | <input type="text" value="2"/>   | Max. Velocity Per Water Temp (ft./sec.) |
| <input type="text" value="FT"/>              | <input type="text" value="FT"/>  | <input type="text" value="FT"/>  | WSFU Predominant Fixture Curve          |
| <input type="text" value="2012 UPC"/>        |                                  |                                  | Applicable Plumbing Code                |

Figure 4-3: System parameters

## Uponor AquaPEX design parameters

### Domestic cold-water piping

- Maximum velocity of 12 ft./sec. through pipe
- Recommended velocity of 10 ft./sec. through pipe

### Domestic hot-water piping

- Maximum velocity of 12 ft./sec. through pipe
- Recommended velocity of 8 ft./sec. through pipe
- Maximum operating temperature of 200°F (93.3°C)

### Domestic hot-water return piping

- Maximum velocity of 2 ft./sec. through pipe
- Maximum operating temperature of 140°F (60°C)

- Sized per the requirements stated in ASPE Plumbing Engineering Design Handbook, Volume 2, *Plumbing Systems*

**Note:** Uponor allows the dedicated fixture supply pipe to be of the same nominal size as the fixture being supplied, provided the dedicated pipe is no longer than 25 linear feet from a uniform-friction-loss-sized pipe.

**Note:** Uponor allows the use of ½" pipe for domestic hot-water return piping provided a flow-control device is in place to maintain velocities at or below 2 ft./sec. Refer to **Table 5-8** on **page 55** for appropriate flow rates at 2 ft./sec.

To determine the maximum velocities based on the use, geographical region and intended operating conditions for your specific project, contact Uponor Design Services at: U.S.: 888.594.7726 or [design.services@uponor.com](mailto:design.services@uponor.com)  
Canada: 888.994.7726 or [design.ca@uponor.com](mailto:design.ca@uponor.com)

**Water Size Chart for Uponor AquaPEX:**

| Uponor AquaPEX Water Size Table<br>2012 UPC - Flush Tank<br>100% Water @ 60°F<br>10.028 PSI/100ft.<br>Max. Velocity = 10 ft./sec. |            |                     |        | Uponor AquaPEX Water Size Table<br>2012 UPC - Flush Tank<br>100% Water @ 120°F<br>10.028 PSI/100ft.<br>Max. Velocity = 8 ft./sec. |            |                     |        | Uponor AquaPEX Water Size Table<br>2012 UPC - Flush Tank<br>100% Water @ 110°F<br>10.028 PSI/100ft.<br>Max. Velocity = 2 ft./sec. |            |                     |       |
|---|------------|---------------------|--------|---|------------|---------------------|--------|---|------------|---------------------|-------|
| Pipe Size   | WSFU Range | Velocity (ft./sec.) | GPM    | Pipe Size   | WSFU Range | Velocity (ft./sec.) | GPM    | Pipe Size   | WSFU Range | Velocity (ft./sec.) | GPM   |
| 3/8"  | 0 – 0      | 3.60                | 1.08   | 3/8"  | 0 – 0      | 4.10                | 1.23   | 3/8"  | 0 – 0      | 2.00                | 0.60  |
| 1/2"  | 1 – 2      | 4.60                | 2.54   | 1/2"  | 1 – 2      | 5.00                | 2.76   | 1/2"  | 0 – 0      | 2.00                | 1.10  |
| 3/4"  | 3 – 7      | 5.80                | 6.39   | 3/4"  | 3 – 8      | 6.40                | 7.05   | 3/4"  | 1 – 1      | 2.00                | 2.20  |
| 1"  | 8 – 17     | 7.00                | 12.73  | 1"  | 9 – 19     | 7.60                | 13.83  | 1"  | 2 – 3      | 2.00                | 3.64  |
| 1 1/4"  | 18 – 33    | 8.00                | 21.76  | 1 1/4"  | 20 – 33    | 8.00                | 21.76  | 1 1/4"  | 4 – 6      | 2.00                | 5.44  |
| 1 1/2"  | 34 – 63    | 9.00                | 34.10  | 1 1/2"  | 34 – 54    | 8.00                | 30.31  | 1 1/2"  | 7 – 9      | 2.00                | 7.58  |
| 2"  | 64 – 199   | 10.00               | 64.97  | 2"  | 55 – 134   | 8.00                | 51.97  | 2"  | 10 – 17    | 2.00                | 12.99 |
| 2 1/2"  | 200 – 375  | 10.00               | 99.01  | 2 1/2"  | 135 – 270  | 8.00                | 79.21  | 2 1/2"  | 18 – 29    | 2.00                | 19.80 |
| 3"  | 376 – 589  | 10.00               | 140.79 | 3"  | 271 – 443  | 8.00                | 112.63 | 3"  | 30 – 49    | 2.00                | 28.16 |

Figure 4-4: Water size chart

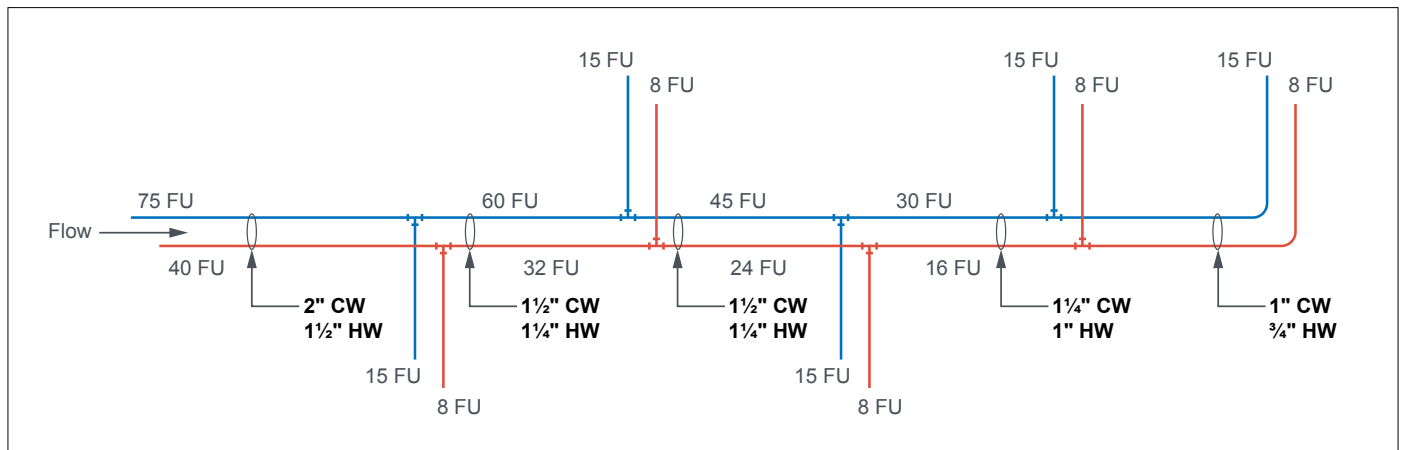


Figure 4-5: Apply water size chart to plumbing design

## Friction loss with Uponor PEX piping

There are two commonly accepted methods to calculate head loss or friction loss in piping systems. The first method, which is preferred and will be discussed in this manual, is the Darcy-Weisbach methodology. The second method is the Hazen-Williams methodology.

## Darcy-Weisbach method

The Darcy-Weisbach equation is a phenomenological equation, which is directly related to empirical test data.

This method relates friction in piping to the roughness of the pipe, fluid velocity, fluid density (water temperature) and fluid viscosity without leveraging correction factors. This is the same for systems using different concentrations of fluids (e.g., propylene glycol).

The following shows a Darcy-Weisbach equation

$$h_f = f \cdot \frac{l}{D} \cdot \frac{V^2}{2g}$$

Where,

$h_f$  = head loss due to friction (ft)

$f$  = dimensionless friction factor

$l$  = length of pipe (ft)

$D$  = internal pipe diameter (ft)

$V$  = average velocity (ft/sec)

$g$  = acceleration due to gravity  $\left(\frac{ft}{sec^2}\right)$

All the parameters in the equation are functions of system design and layout except for the dimensionless friction factor,  $f$ . The friction factor  $f$  is derived using the Colebrook formula which represents  $f$  implicitly.

$$\frac{1}{\sqrt{f}} = -2 \cdot \log \left[ \frac{\epsilon/D}{3.7} + \frac{2.51}{Re \sqrt{f}} \right]$$

Where,

$f$  = dimensionless friction factor

$D$  = internal pipe diameter (ft)

$\epsilon$  = internal roughness (ft)

The roughness of Uponor PEX-a pipe is  $1.58 \times 10^{-6}$  ft.

$Re$  = Reynolds number =  $\frac{\rho V D}{\mu}$

Where,

$D$  = internal pipe diameter (ft)

$\rho$  = fluid density  $\left(\frac{lb}{ft^3}\right)$

$V$  = average velocity (ft/sec)

$\mu$  = dynamic viscosity  $\left(\frac{lb \cdot sec}{ft^2}\right)$

Since the Colebrook formula is an implicit formula, many approximations have been derived to explicitly represent the friction factor. Using the Manadilli approximation yields a very small error with respect to the Colebrook equation. In fact, the maximum error is up to 2.06 percent. The Manadilli approximation shown below is used for all Uponor pipe head loss calculations.

$$f = \left[ \frac{1}{-2 \cdot \log \left( \frac{\epsilon}{3.7 \cdot D} + \frac{95}{Re^{0.983}} - \frac{96.82}{Re} \right)} \right]^2$$

The friction factor can also be found by using a standard Moody Diagram. The Moody Diagram is a function of the Reynolds number and the ratio between pipe roughness and internal diameter. Below is a Moody Diagram created for PEX pipe.

## Moody Diagram for ASTM PEX by pipe size — Manadilli Approximation

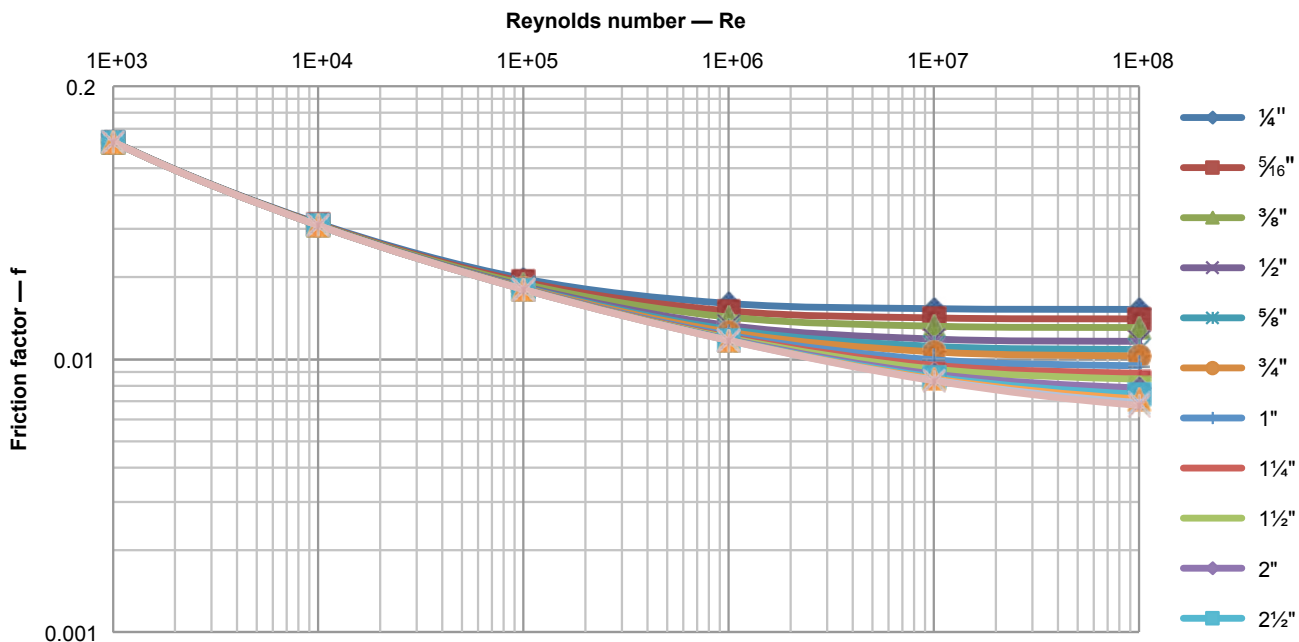


Figure 4-6: Moody diagram for ASTM PEX by pipe size

## Pressure differential

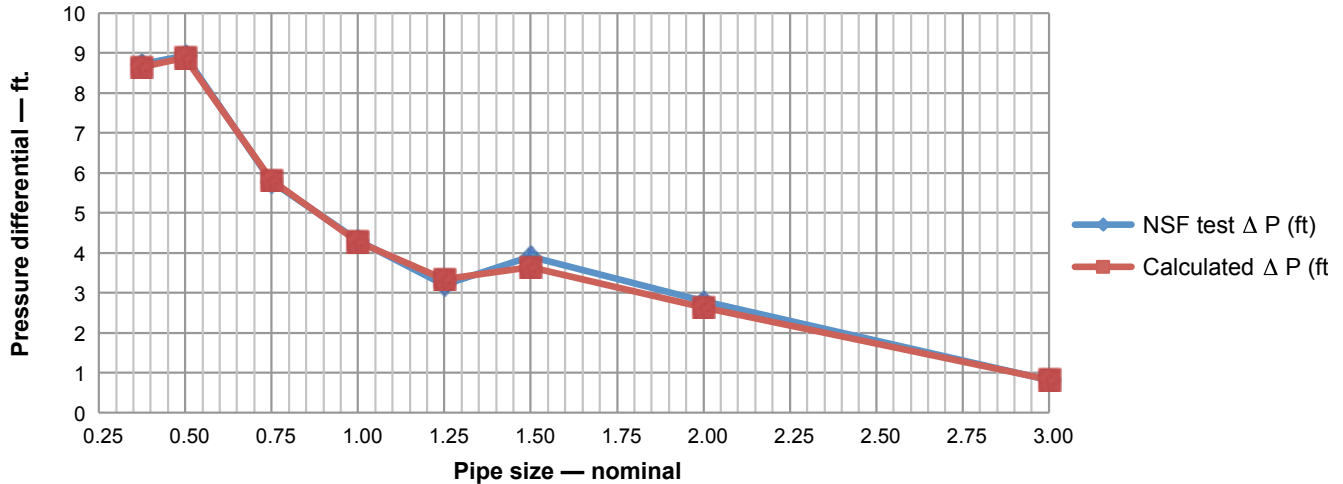


Figure 4-7: Friction loss comparing Darcy-Weisbach vs. NSF test data

## Hazen-Williams method

The Hazen-Williams method is another method for sizing PEX. However, it is not preferred by Uponor (especially for heating and cooling system sizing). Like the Darcy-Weisbach formula, this formulation is also based

on empirical relationships with water flowing through pipes. However, correlation with test data is much more limited. This formulation set was derived for fire sprinkler design and

large water supply networks with 3" and larger piping. It is also strictly for 100 percent water and does not account for temperature and fluid viscosity. Since its development,

additional temperature correction and fluid correction factors have been established. However, results can show significant error when compared to test data.

The following equation shows the Hazen-Williams method.

$$h_f = 0.2083 \cdot \left( \frac{100}{C} \right)^{1.852} \cdot \frac{q^{1.852}}{D^{4.8655}}$$

Where,

$$h_f = \text{head loss due to friction per 100 ft} \left( \frac{\text{ft}_{\text{water}}}{100 \text{ ft}_{\text{pipe}}} \right)$$

$C$  = Hazen-Williams roughness constant

The Hazen-Williams roughness constant for Uponor PEX-a is 163.


$q$  = volumetric flow rate (gpm)

$D$  = internal pipe diameter (in)

## Comparing Darcy-Weisbach and Hazen-Williams

NSF performed testing to calculate the friction loss of Uponor PEX pipe and Uponor ProPEX fittings. The testing allowed Uponor to analyze empirical test data and compare it with the Darcy-Weisbach and Hazen-Williams methods.

The following graph illustrates the comparison.

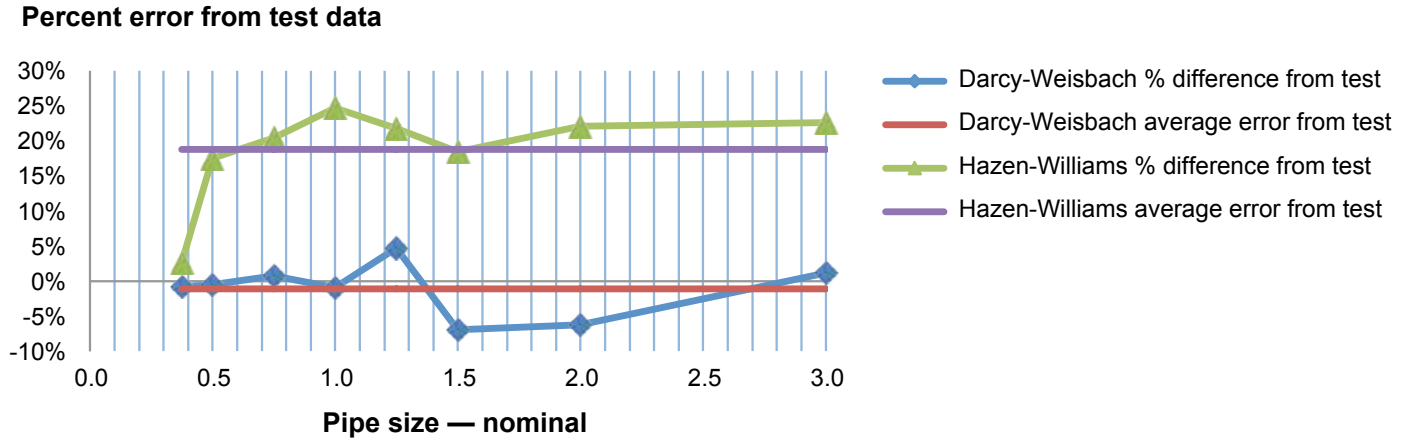

**Figure 4-8: Darcy-Weisbach and Hazen-Williams comparison**

The Y axis represents the percent error from the test data; the X axis represents nominal pipe size. The graph shows the average error when using the Darcy-Weisbach method is less than 1 percent when compared to the test data. The Hazen-Williams method, however, yields an 18 percent average error compared to the test data.

**Note:** The test was performed with 70°F (21.1°C), 100 percent water.

### Friction loss of fittings

There are two commonly accepted methods when analyzing pressure loss or head loss of fittings. The first and preferred method uses  $C_v$  values to precisely calculate

fittings losses. The  $C_v$  value represents how many gpm can flow through a fitting at 1 psi pressure drop.

For example, a fitting with a  $C_v$  of 5.0 would flow 5.0 gpm at a 1 psi pressure drop across the

fitting. Since  $C_v$  is a function of flow rate versus pressure drop, it yields an accurate representation of fitting friction loss. The second method uses equivalent lengths. Uponor has created charts for both equivalent length and

$C_v$ . The equivalent lengths were developed using a flow velocity of 8 fps.



## The $C_v$ method for calculating friction loss

$C_v$  is a function of flow rate versus pressure drop across the fitting. It also accounts for the density of the fluid.

Refer to the following friction loss calculation using the  $C_v$  method.

$$\Delta P = \left( \frac{P_f}{P_w} \right) \left( \frac{F}{C_v} \right)^2$$

Where,

$\Delta P$  = pressure drop across the fitting (psi)

$$P_f = \text{fluid density} \left( \frac{\text{lb}}{\text{ft}^3} \right)$$

$$P_w = \text{density of water at } 60^\circ\text{F} \left( \frac{\text{lb}}{\text{ft}^3} \right)$$

The density of water at 60°F (15.6°C) is 62.38 pounds per cubic foot.

$F$  = volumetric flow rate through the fitting (gpm)

$C_v$  = known  $C_v$  rating of the fitting

This calculation yields a value in pounds per square inch which, for hydronic sizing, needs to be converted to feet of head as 100 percent water.

The conversion to feet of water is shown below.

$$h_f = \frac{144 \text{in}^2 \cdot \Delta P}{1 \text{ft}^3 \cdot P_f}$$

Where,

$h_f$  = head loss due to friction across the fitting (ft)

$$P_f = \text{fluid density} \left( \frac{\text{lb}}{\text{ft}^3} \right)$$

$\Delta P$  = pressure drop across the fitting (psi)

This value can be cumulatively added to the values from the other fittings in the distribution line to calculate the total loss for the fittings in the system.

### Example 2

For a given elbow with a  $C_v$  of 6.7 and a flow rate of 3.5 gpm at a water temperature of 160°F (71.1°C), what is the friction loss of the fitting (in feet)?

Assuming the fluid is 100 percent water, here is the calculation.

$$P_f = 60.99 \frac{\text{lb}}{\text{ft}^3}$$

$$F = 3.5 \text{ gpm}$$

$$C_v = 6.7$$

$$\Delta P = \left( \frac{P_f}{P_w} \right) \left( \frac{F}{C_v} \right)^2 = \left( \frac{60.99 \frac{\text{lb}}{\text{ft}^3}}{62.38 \frac{\text{lb}}{\text{ft}^3}} \right) \left( \frac{3.5 \text{ gpm}}{6.7} \right)^2 = 0.267 \text{ psi}$$

**Note:** To make the units work in the  $C_v$  formula, it must be assumed the  $C_v$  has the units of gpm and the result multiplied by 1 psi.

With the pressure differential known, the value found can be converted to head loss in feet as seen below.

$$h_f = \frac{144 \text{in}^2 \cdot \Delta P}{1 \text{ft}^2 \cdot P_f} = \frac{144 \text{in}^2 \cdot 0.267 \text{ psi}}{1 \text{ft}^2 \cdot 60.99 \frac{\text{lb}}{\text{ft}^3}} = 0.63 \text{ ft}$$

# UPC table 610.4

Tables taken from IAPMO ER 0253

**TABLE 610.4  
FIXTURE UNIT TABLE FOR DETERMINING WATER PIPE AND METER SIZES**

| METER AND STREET SERVICE (inches)                | BUILDING SUPPLY AND BRANCHES (inches) | MAXIMUM ALLOWABLE LENGTH (feet) |     |     |     |     |     |     |     |     |     |     |     |     |     |      |    |
|--|---------------------------------------|---------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|----|
|  |                                       | 40                              | 60  | 80  | 100 | 150 | 200 | 250 | 300 | 400 | 500 | 600 | 700 | 800 | 900 | 1000 |    |
| <b>PRESSURE RANGE – 30 to 45 psi<sup>1</sup></b> |                                       |                                 |     |     |     |     |     |     |     |     |     |     |     |     |     |      |    |
| ¾  | ½ <sup>2</sup>                        | 6                               | 5   | 4   | 3   | 2   | 1   | 1   | 1   | 0   | 0   | 0   | 0   | 0   | 0   | 0    |    |
| ¾  | ¾                                     | 16                              | 16  | 14  | 12  | 9   | 6   | 5   | 5   | 4   | 4   | 3   | 2   | 2   | 2   | 1    |    |
| ¾  | 1                                     | 29                              | 25  | 23  | 21  | 17  | 15  | 13  | 12  | 10  | 8   | 6   | 6   | 6   | 6   | 6    |    |
| 1  | 1                                     | 36                              | 31  | 27  | 25  | 20  | 17  | 15  | 13  | 12  | 10  | 8   | 6   | 6   | 6   | 6    |    |
| ¾  | 1¼                                    | 36                              | 33  | 31  | 28  | 24  | 23  | 21  | 19  | 17  | 16  | 13  | 12  | 12  | 11  | 11   |    |
| 1  | 1¼                                    | 54                              | 47  | 42  | 38  | 32  | 28  | 25  | 23  | 19  | 17  | 14  | 12  | 12  | 11  | 11   |    |
| 1½   | 1¼                                    | 78                              | 68  | 57  | 48  | 38  | 32  | 28  | 25  | 21  | 18  | 15  | 12  | 12  | 11  | 11   |    |
| 1  | 1½                                    | 85                              | 84  | 79  | 65  | 56  | 48  | 43  | 38  | 32  | 28  | 26  | 22  | 21  | 20  | 20   |    |
| 1½   | 1½                                    | 150                             | 124 | 105 | 91  | 70  | 57  | 49  | 45  | 36  | 31  | 26  | 23  | 21  | 20  | 20   |    |
| 2  | 1½                                    | 151                             | 129 | 129 | 110 | 80  | 64  | 53  | 46  | 38  | 32  | 27  | 23  | 21  | 20  | 20   |    |
| 1  | 2                                     | 85                              | 85  | 85  | 85  | 85  | 85  | 82  | 80  | 66  | 61  | 57  | 52  | 49  | 46  | 43   |    |
| 1½   | 2                                     | 220                             | 205 | 190 | 176 | 155 | 138 | 127 | 120 | 104 | 85  | 70  | 61  | 57  | 54  | 51   |    |
| 2  | 2                                     | 370                             | 327 | 292 | 265 | 217 | 185 | 164 | 147 | 124 | 96  | 70  | 61  | 57  | 54  | 51   |    |
| 2  | 2½                                    | 445                             | 418 | 390 | 370 | 330 | 300 | 280 | 265 | 240 | 220 | 198 | 175 | 158 | 143 | 133  |    |
| <b>PRESSURE RANGE – 46 to 60 psi<sup>1</sup></b> |                                       |                                 |     |     |     |     |     |     |     |     |     |     |     |     |     |      |    |
| ¾  | ½ <sup>2</sup>                        | 7                               | 7   | 6   | 5   | 4   | 3   | 2   | 2   | 1   | 1   | 1   | 0   | 0   | 0   | 0    |    |
| ¾  | ¾                                     | 20                              | 20  | 19  | 17  | 14  | 11  | 9   | 8   | 6   | 5   | 4   | 4   | 3   | 3   | 3    |    |
| ¾  | 1                                     | 39                              | 39  | 36  | 33  | 28  | 23  | 21  | 19  | 17  | 14  | 12  | 10  | 9   | 8   | 8    |    |
| 1  | 1                                     | 39                              | 39  | 39  | 36  | 30  | 25  | 23  | 20  | 18  | 15  | 12  | 10  | 9   | 8   | 8    |    |
| ¾  | 1¼                                    | 39                              | 39  | 39  | 39  | 39  | 39  | 34  | 32  | 27  | 25  | 22  | 19  | 19  | 17  | 16   |    |
| 1  | 1¼                                    | 78                              | 78  | 76  | 67  | 52  | 44  | 39  | 36  | 30  | 27  | 24  | 20  | 19  | 17  | 16   |    |
| 1½   | 1¼                                    | 78                              | 78  | 78  | 78  | 66  | 52  | 44  | 39  | 33  | 29  | 24  | 20  | 19  | 17  | 16   |    |
| 1  | 1½                                    | 85                              | 85  | 85  | 85  | 85  | 85  | 80  | 67  | 55  | 49  | 41  | 37  | 34  | 32  | 30   |    |
| 1½   | 1½                                    | 151                             | 151 | 151 | 151 | 128 | 105 | 90  | 78  | 62  | 52  | 42  | 38  | 35  | 32  | 30   |    |
| 2  | 1½                                    | 151                             | 151 | 151 | 151 | 150 | 117 | 98  | 84  | 67  | 55  | 42  | 38  | 35  | 32  | 30   |    |
| 1  | 2                                     | 85                              | 85  | 85  | 85  | 85  | 85  | 85  | 85  | 85  | 85  | 85  | 85  | 85  | 85  | 83   | 80 |
| 1½   | 2                                     | 370                             | 370 | 340 | 318 | 272 | 240 | 220 | 198 | 170 | 150 | 135 | 123 | 110 | 102 | 94   |    |
| 2  | 2                                     | 370                             | 370 | 370 | 370 | 368 | 318 | 280 | 250 | 205 | 165 | 142 | 123 | 110 | 102 | 94   |    |
| 2  | 2½                                    | 654                             | 640 | 610 | 580 | 535 | 500 | 470 | 440 | 400 | 365 | 335 | 315 | 285 | 267 | 250  |    |
| <b>PRESSURE RANGE – Over 60 psi<sup>1</sup></b>  |                                       |                                 |     |     |     |     |     |     |     |     |     |     |     |     |     |      |    |
| ¾  | ½ <sup>2</sup>                        | 7                               | 7   | 7   | 6   | 5   | 4   | 3   | 3   | 2   | 1   | 1   | 1   | 1   | 1   | 0    |    |
| ¾  | ¾                                     | 20                              | 20  | 20  | 20  | 17  | 13  | 11  | 10  | 8   | 7   | 6   | 6   | 5   | 4   | 4    |    |
| ¾  | 1                                     | 39                              | 39  | 39  | 39  | 35  | 30  | 27  | 24  | 21  | 17  | 14  | 13  | 12  | 12  | 11   |    |
| 1  | 1                                     | 39                              | 39  | 39  | 39  | 38  | 32  | 29  | 26  | 22  | 18  | 14  | 13  | 12  | 12  | 11   |    |
| ¾  | 1¼                                    | 39                              | 39  | 39  | 39  | 39  | 39  | 39  | 39  | 34  | 28  | 26  | 25  | 23  | 22  | 21   |    |
| 1  | 1¼                                    | 78                              | 78  | 78  | 78  | 74  | 62  | 53  | 47  | 39  | 31  | 26  | 25  | 23  | 22  | 21   |    |
| 1½   | 1¼                                    | 78                              | 78  | 78  | 78  | 78  | 74  | 65  | 54  | 43  | 34  | 26  | 25  | 23  | 22  | 21   |    |
| 1  | 1½                                    | 85                              | 85  | 85  | 85  | 85  | 85  | 85  | 85  | 81  | 64  | 51  | 48  | 46  | 43  | 40   |    |
| 1½   | 1½                                    | 151                             | 151 | 151 | 151 | 151 | 151 | 130 | 113 | 88  | 73  | 51  | 51  | 46  | 43  | 40   |    |
| 2  | 1½                                    | 151                             | 151 | 151 | 151 | 151 | 151 | 142 | 122 | 98  | 82  | 64  | 51  | 46  | 43  | 40   |    |
| 1  | 2                                     | 85                              | 85  | 85  | 85  | 85  | 85  | 85  | 85  | 85  | 85  | 85  | 85  | 85  | 85  | 85   |    |
| 1½   | 2                                     | 370                             | 370 | 370 | 370 | 360 | 335 | 305 | 282 | 244 | 212 | 187 | 172 | 153 | 141 | 129  |    |
| 2  | 2                                     | 370                             | 370 | 370 | 370 | 370 | 370 | 370 | 340 | 288 | 245 | 204 | 172 | 153 | 141 | 129  |    |
| 2  | 2½                                    | 654                             | 654 | 654 | 654 | 654 | 650 | 610 | 570 | 510 | 460 | 430 | 404 | 380 | 356 | 329  |    |

For SI units: 1 inch = 25 mm, 1 foot = 304.8 mm, 1 pound-force per square inch = 6.8947 kPa

**Notes:**

<sup>1</sup> Available static pressure after head loss.

<sup>2</sup> Building supply, not less than ¾ of an inch (20 mm) nominal size.

# IPC table E201.1

Tables taken from ICC-ES-PMG 1006

**TABLE E201.1  
MINIMUM SIZE OF WATER METERS, MAINS AND DISTRIBUTION PIPING  
BASED ON WATER SUPPLY FIXTURE UNIT VALUES (w.s.f.u.)**

| METER AND SERVICE PIPE (inches) | DISTRIBUTION PIPE (inches) | MAXIMUM DEVELOPMENT LENGTH (feet) |     |     |      |      |     |     |     |      |      |
|---------------------------------|----------------------------|-----------------------------------|-----|-----|------|------|-----|-----|-----|------|------|
|                                 |                            | 40                                | 60  | 80  | 100  | 150  | 200 | 250 | 300 | 400  | 500  |
| Pressure Range 30 to 39 psi     |                            | 40                                | 60  | 80  | 100  | 150  | 200 | 250 | 300 | 400  | 500  |
| 3/4                             | 1/2 <sup>a</sup>           | 2.5                               | 2   | 1.5 | 1.5  | 1    | 1   | 0.5 | 0.5 | 0    | 0    |
| 3/4                             | 3/4                        | 9.5                               | 7.5 | 6   | 5.5  | 4    | 3.5 | 3   | 2.5 | 2    | 1.5  |
| 3/4                             | 1                          | 32                                | 25  | 20  | 16.5 | 11   | 9   | 7.8 | 6.5 | 5.5  | 4.5  |
| 1                               | 1                          | 32                                | 32  | 27  | 21   | 13.5 | 10  | 8   | 7   | 5.5  | 5    |
| 3/4                             | 1 1/4                      | 32                                | 32  | 32  | 32   | 30   | 24  | 20  | 17  | 13   | 10.5 |
| 1                               | 1 1/4                      | 80                                | 80  | 70  | 61   | 45   | 34  | 27  | 22  | 16   | 12   |
| 1 1/2                           | 1 1/4                      | 80                                | 80  | 80  | 75   | 54   | 40  | 31  | 25  | 17.5 | 13   |
| 1                               | 1 1/2                      | 87                                | 87  | 87  | 87   | 84   | 73  | 64  | 56  | 45   | 36   |
| 1 1/2                           | 1 1/2                      | 151                               | 151 | 151 | 151  | 117  | 92  | 79  | 69  | 54   | 43   |
| 2                               | 1 1/2                      | 151                               | 151 | 151 | 151  | 128  | 99  | 83  | 72  | 56   | 45   |
| 1                               | 2                          | 87                                | 87  | 87  | 87   | 87   | 87  | 87  | 87  | 87   | 86   |
| 1 1/2                           | 2                          | 275                               | 275 | 275 | 275  | 258  | 223 | 196 | 174 | 144  | 122  |
| 2                               | 2                          | 365                               | 365 | 365 | 365  | 318  | 266 | 229 | 201 | 160  | 134  |
| 2                               | 2 1/2                      | 533                               | 533 | 533 | 533  | 533  | 495 | 448 | 409 | 353  | 311  |

| METER AND SERVICE PIPE (inches) | DISTRIBUTION PIPE (inches) | MAXIMUM DEVELOPMENT LENGTH (feet) |     |     |     |     |      |      |     |     |      |
|---------------------------------|----------------------------|-----------------------------------|-----|-----|-----|-----|------|------|-----|-----|------|
|                                 |                            | 40                                | 60  | 80  | 100 | 150 | 200  | 250  | 300 | 400 | 500  |
| Pressure Range 40 to 49 psi     |                            | 40                                | 60  | 80  | 100 | 150 | 200  | 250  | 300 | 400 | 500  |
| 3/4                             | 1/2 <sup>a</sup>           | 3                                 | 2.5 | 2   | 1.5 | 1.5 | 1    | 1    | 0.5 | 0.5 | 0.5  |
| 3/4                             | 3/4                        | 9.5                               | 9.5 | 8.5 | 7   | 5.5 | 4.5  | 3.5  | 3   | 2.5 | 2    |
| 3/4                             | 1                          | 32                                | 32  | 32  | 26  | 18  | 13.5 | 10.5 | 9   | 7.5 | 6    |
| 1                               | 1                          | 32                                | 32  | 32  | 32  | 21  | 15   | 11.5 | 9.5 | 7.5 | 6.5  |
| 3/4                             | 1 1/4                      | 32                                | 32  | 32  | 32  | 32  | 32   | 32   | 27  | 21  | 16.5 |
| 1                               | 1 1/4                      | 80                                | 80  | 80  | 80  | 65  | 52   | 42   | 35  | 26  | 20   |
| 1 1/2                           | 1 1/4                      | 80                                | 80  | 80  | 80  | 75  | 59   | 48   | 39  | 28  | 21   |
| 1                               | 1 1/2                      | 87                                | 87  | 87  | 87  | 87  | 87   | 87   | 78  | 65  | 55   |
| 1 1/2                           | 1 1/2                      | 151                               | 151 | 151 | 151 | 151 | 130  | 109  | 93  | 75  | 63   |
| 2                               | 1 1/2                      | 151                               | 151 | 151 | 151 | 151 | 139  | 115  | 98  | 77  | 64   |
| 1                               | 2                          | 87                                | 87  | 87  | 87  | 87  | 87   | 87   | 87  | 87  | 87   |
| 1 1/2                           | 2                          | 275                               | 275 | 275 | 275 | 275 | 275  | 264  | 238 | 198 | 169  |
| 2                               | 2                          | 365                               | 365 | 365 | 365 | 365 | 349  | 304  | 270 | 220 | 185  |
| 2                               | 2 1/2                      | 533                               | 533 | 533 | 533 | 533 | 533  | 533  | 528 | 456 | 403  |

*(continued)*

# IPC table E201.1

Tables taken from ICC-ES-PMG 1006

**TABLE E201.1—continued**  
**MINIMUM SIZE OF WATER METERS, MAINS AND DISTRIBUTION PIPING**  
**BASED ON WATER SUPPLY FIXTURE UNIT VALUES (w.s.f.u.)**

| METER AND SERVICE PIPE (inches) | DISTRIBUTION PIPE (inches) | MAXIMUM DEVELOPMENT LENGTH (feet) |     |     |     |     |      |      |     |     |     |
|---------------------------------|----------------------------|-----------------------------------|-----|-----|-----|-----|------|------|-----|-----|-----|
|                                 |                            | 40                                | 60  | 80  | 100 | 150 | 200  | 250  | 300 | 400 | 500 |
| Pressure Range 50 to 60 psi     |                            | 40                                | 60  | 80  | 100 | 150 | 200  | 250  | 300 | 400 | 500 |
| 3/4                             | 1/2 <sup>a</sup>           | 3                                 | 3   | 2.5 | 2   | 1.5 | 1    | 1    | 1   | 0.5 | 0.5 |
| 3/4                             | 3/4                        | 9.5                               | 9.5 | 9.5 | 8.5 | 6.5 | 5    | 4.5  | 4   | 3   | 2.5 |
| 3/4                             | 1                          | 32                                | 32  | 32  | 32  | 25  | 18.5 | 14.5 | 12  | 9.5 | 8   |
| 1                               | 1                          | 32                                | 32  | 32  | 32  | 30  | 22   | 16.5 | 13  | 10  | 8   |
| 3/4                             | 1 1/4                      | 32                                | 32  | 32  | 32  | 32  | 32   | 32   | 32  | 29  | 24  |
| 1                               | 1 1/4                      | 80                                | 80  | 80  | 80  | 80  | 68   | 57   | 48  | 35  | 28  |
| 1 1/2                           | 1 1/4                      | 80                                | 80  | 80  | 80  | 80  | 75   | 63   | 53  | 39  | 29  |
| 1                               | 1 1/2                      | 87                                | 87  | 87  | 87  | 87  | 87   | 87   | 87  | 82  | 70  |
| 1 1/2                           | 1 1/2                      | 151                               | 151 | 151 | 151 | 151 | 151  | 139  | 120 | 94  | 79  |
| 2                               | 1 1/2                      | 151                               | 151 | 151 | 151 | 151 | 151  | 146  | 126 | 97  | 81  |
| 1                               | 2                          | 87                                | 87  | 87  | 87  | 87  | 87   | 87   | 87  | 87  | 87  |
| 1 1/2                           | 2                          | 275                               | 275 | 275 | 275 | 275 | 275  | 275  | 275 | 247 | 213 |
| 2                               | 2                          | 365                               | 365 | 365 | 365 | 365 | 365  | 365  | 329 | 272 | 232 |
| 2                               | 2 1/2                      | 533                               | 533 | 533 | 533 | 533 | 533  | 533  | 533 | 533 | 486 |

| METER AND SERVICE PIPE (inches) | DISTRIBUTION PIPE (inches) | MAXIMUM DEVELOPMENT LENGTH (feet) |     |     |     |     |     |      |      |      |     |
|---------------------------------|----------------------------|-----------------------------------|-----|-----|-----|-----|-----|------|------|------|-----|
|                                 |                            | 40                                | 60  | 80  | 100 | 150 | 200 | 250  | 300  | 400  | 500 |
| Pressure Range Over 60          |                            | 40                                | 60  | 80  | 100 | 150 | 200 | 250  | 300  | 400  | 500 |
| 3/4                             | 1/2 <sup>a</sup>           | 3                                 | 3   | 3   | 2.5 | 2   | 1.5 | 1.5  | 1    | 1    | 0.5 |
| 3/4                             | 3/4                        | 9.5                               | 9.5 | 9.5 | 9.5 | 7.5 | 6   | 5    | 4.5  | 3.5  | 3   |
| 3/4                             | 1                          | 32                                | 32  | 32  | 32  | 32  | 24  | 19.5 | 15.5 | 11.5 | 9.5 |
| 1                               | 1                          | 32                                | 32  | 32  | 32  | 32  | 28  | 28   | 17   | 12   | 9.5 |
| 3/4                             | 1 1/4                      | 32                                | 32  | 32  | 32  | 32  | 32  | 32   | 32   | 32   | 30  |
| 1                               | 1 1/4                      | 80                                | 80  | 80  | 80  | 80  | 80  | 69   | 60   | 46   | 36  |
| 1 1/2                           | 1 1/4                      | 80                                | 80  | 80  | 80  | 80  | 80  | 76   | 65   | 50   | 38  |
| 1                               | 1 1/2                      | 87                                | 87  | 87  | 87  | 87  | 87  | 87   | 87   | 87   | 84  |
| 1 1/2                           | 1 1/2                      | 151                               | 151 | 151 | 151 | 151 | 151 | 151  | 144  | 114  | 94  |
| 2                               | 1 1/2                      | 151                               | 151 | 151 | 151 | 151 | 151 | 151  | 151  | 118  | 97  |
| 1                               | 2                          | 87                                | 87  | 87  | 87  | 87  | 87  | 87   | 87   | 87   | 87  |
| 1 1/2                           | 2                          | 275                               | 275 | 275 | 275 | 275 | 275 | 275  | 275  | 275  | 252 |
| 2                               | 2                          | 365                               | 368 | 368 | 368 | 368 | 368 | 368  | 368  | 318  | 273 |
| 2                               | 2 1/2                      | 533                               | 533 | 533 | 533 | 533 | 533 | 533  | 533  | 533  | 533 |

For SI: 1 inch = 25.4, 1 foot = 304.8 mm.

a. Minimum size for building supply is 3/4-inch pipe.

# NPCC table A-2.6.3.1(2)A

Tables taken from NPCC

**Current Table A-2.6.3.1.(2)A, Pressure Range 200-310 kPa**

| Water Service Pipe Size in. | Water Distribution Pipe Size in. | Maximum Allowable Length, meters |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----------------------------|----------------------------------|----------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|                             |                                  | 12                               | 18  | 24  | 30  | 46  | 61  | 76  | 91  | 122 | 152 | 183 | 213 | 244 | 274 | 305 |
|                             |                                  | Number of Fixture Units Served   |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|                             |                                  | Flow Velocity, m/s: 3.0 2.4 1.5  |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| Pressure Range              |                                  | 200 to 310 kPa                   |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 3/4                         | 1/2                              | 6                                | 5   | 4   | 3   | 2   | 1   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| 3/4                         | 5/8                              | 12                               | 10  | 9   | 7   | 5   | 3   | 3   | 3   | 2   | 2   | 1   | 1   | 1   | 1   | 0   |
| 3/4                         | 3/4                              | 18                               | 16  | 14  | 12  | 9   | 6   | 5   | 5   | 4   | 4   | 3   | 2   | 2   | 2   | 1   |
| 1                           | 1                                | 36                               | 31  | 27  | 25  | 20  | 17  | 15  | 13  | 12  | 10  | 8   | 6   | 6   | 6   | 6   |
| 1-1/2                       | 1-1/4                            | 83                               | 68  | 57  | 48  | 38  | 32  | 28  | 25  | 21  | 18  | 15  | 12  | 12  | 11  | 11  |
| 1-1/2                       | 1-1/2                            | 151                              | 124 | 105 | 91  | 70  | 57  | 49  | 45  | 36  | 31  | 26  | 23  | 21  | 20  | 20  |
| 2                           | 1-1/2                            | 151                              | 151 | 132 | 110 | 80  | 64  | 53  | 46  | 38  | 32  | 27  | 23  | 21  | 20  | 20  |
| 2                           | 2                                | 359                              | 329 | 292 | 265 | 217 | 185 | 164 | 147 | 124 | 96  | 70  | 61  | 57  | 54  | 51  |
| 2-1/2                       | 2-1/2                            | 445                              | 418 | 390 | 370 | 330 | 300 | 280 | 265 | 240 | 220 | 198 | 175 | 158 | 143 | 133 |

**Current Table A-2.6.3.1.(2)A, Pressure Range 311-413 kPa**

| Water Service Pipe Size in. | Water Distribution Pipe Size in. | Maximum Allowable Length, meters |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----------------------------|----------------------------------|----------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|                             |                                  | 12                               | 18  | 24  | 30  | 46  | 61  | 76  | 91  | 122 | 152 | 183 | 213 | 244 | 274 | 305 |
|                             |                                  | Number of Fixture Units Served   |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|                             |                                  | Flow Velocity, m/s: 3.0 2.4 1.5  |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| Pressure Range              |                                  | 311 to 413 kPa                   |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 3/4                         | 1/2                              | 8                                | 7   | 6   | 5   | 4   | 3   | 2   | 2   | 1   | 1   | 1   | 0   | 0   | 0   | 0   |
| 3/4                         | 5/8                              | 13                               | 13  | 12  | 11  | 9   | 7   | 5   | 5   | 3   | 3   | 2   | 2   | 1   | 1   | 1   |
| 3/4                         | 3/4                              | 21                               | 21  | 19  | 17  | 14  | 11  | 9   | 8   | 6   | 5   | 4   | 4   | 3   | 3   | 3   |
| 1                           | 1                                | 42                               | 42  | 41  | 36  | 30  | 25  | 23  | 20  | 18  | 15  | 12  | 10  | 9   | 8   | 8   |
| 1-1/2                       | 1-1/4                            | 83                               | 83  | 83  | 83  | 66  | 52  | 44  | 39  | 33  | 29  | 24  | 20  | 19  | 17  | 16  |
| 1-1/2                       | 1-1/2                            | 151                              | 151 | 151 | 151 | 128 | 105 | 90  | 78  | 62  | 52  | 42  | 38  | 35  | 32  | 30  |
| 2                           | 1-1/2                            | 151                              | 151 | 151 | 151 | 150 | 117 | 98  | 84  | 67  | 55  | 42  | 38  | 35  | 32  | 30  |
| 2                           | 2                                | 359                              | 359 | 359 | 359 | 359 | 318 | 280 | 250 | 205 | 165 | 142 | 123 | 110 | 102 | 94  |
| 2-1/2                       | 2-1/2                            | 611                              | 611 | 610 | 580 | 535 | 500 | 470 | 440 | 400 | 365 | 335 | 315 | 285 | 267 | 250 |

**Current Table A-2.6.3.1.(2)A, Pressure Range Over 413 kPa**

| Water Service Pipe Size in. | Water Distribution Pipe Size in. | Maximum Allowable Length, meters |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----------------------------|----------------------------------|----------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|                             |                                  | 12                               | 18  | 24  | 30  | 46  | 61  | 76  | 91  | 122 | 152 | 183 | 213 | 244 | 274 | 305 |
|                             |                                  | Number of Fixture Units Served   |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|                             |                                  | Flow Velocity, m/s: 3.0 2.4 1.5  |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| Pressure Over               |                                  | 413 kPa                          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 3/4                         | 1/2                              | 8                                | 8   | 7   | 6   | 5   | 4   | 3   | 3   | 2   | 1   | 1   | 1   | 1   | 1   | 0   |
| 3/4                         | 5/8                              | 13                               | 13  | 13  | 13  | 11  | 8   | 7   | 6   | 5   | 4   | 3   | 3   | 3   | 2   | 2   |
| 3/4                         | 3/4                              | 21                               | 21  | 21  | 21  | 17  | 13  | 11  | 10  | 8   | 7   | 6   | 6   | 5   | 4   | 4   |
| 1                           | 1                                | 42                               | 42  | 42  | 42  | 38  | 32  | 29  | 26  | 22  | 18  | 14  | 13  | 12  | 12  | 11  |
| 1-1/2                       | 1-1/4                            | 83                               | 83  | 83  | 83  | 83  | 74  | 62  | 54  | 43  | 34  | 26  | 25  | 23  | 22  | 21  |
| 1-1/2                       | 1-1/2                            | 151                              | 151 | 151 | 151 | 151 | 151 | 130 | 113 | 88  | 73  | 51  | 51  | 46  | 43  | 40  |
| 2                           | 1-1/2                            | 151                              | 151 | 151 | 151 | 151 | 151 | 142 | 122 | 98  | 82  | 64  | 51  | 46  | 43  | 40  |
| 2                           | 2                                | 359                              | 359 | 359 | 359 | 359 | 359 | 359 | 340 | 288 | 245 | 204 | 172 | 153 | 141 | 129 |
| 2-1/2                       | 2-1/2                            | 611                              | 611 | 611 | 611 | 611 | 611 | 610 | 570 | 510 | 460 | 430 | 404 | 380 | 356 | 329 |

## NPCC table 2.6.3.2

Reproduced with the permission of the National Research Council of Canada, copyright holder.

### 2.6.3.2. Hydraulic Load

- 1) Except as provided in Sentence (3), the hydraulic load of a *fixture* or device that is listed in Table 2.6.3.2.A. shall be the number of *fixture units* given in the Table.
- 2) Except as provided in Sentences (1) and (3), the hydraulic load of a *fixture* that is not listed in Table 2.6.3.2.A. is the number of *fixture units* listed in Table 2.6.3.2.D.
- 3) Where *fixtures* are supplied with both hot and cold water, the hydraulic loads for maximum separate demands shall be 75% of the hydraulic load of the *fixture units* given in Tables 2.6.3.2.A. and 2.6.3.2.D. when using a detailed engineering design method.
- 4) The hydraulic load of urinals and water closets with direct flush valves shall be the number of *fixture units* listed in Tables 2.6.3.2.B. and 2.6.3.2.C. (See Appendix A.)

**Table 2.6.3.2.A.**  
**Sizing of Water Distribution Systems<sup>(1) (2)</sup>**

Forming Part of Sentences 2.6.3.2.(1), (2) and (3), and 2.6.3.4.(2), (3) and (5)

| Fixture or Device  | Minimum Size of Supply Pipe, inches | Private Use Hydraulic Load, fixture units |      |       | Public Use Hydraulic Load, fixture units |      |       |
|--|-------------------------------------|---|------|-------|--|------|-------|
|  |                                     | Cold                                      | Hot  | Total | Cold                                     | Hot  | Total |
| Bathroom group with 6 LPF flush tank <sup>(3)</sup>              | n/a                                 | 2.7                                       | 1.5  | 3.6   | -  | -    | -     |
| Bathroom group with greater than 6 LPF flush tank <sup>(3)</sup> | n/a                                 | 4   | 3    | 6     | -  | -    | -     |
| Bathroom group with more than 3 fixtures                         | -                                   | -   | -    | (4)   | -  | -    | -     |
| Bathtub with or without shower head                              | ½                                   | 1   | 1    | 1.4   | 3  | 3    | 4     |
| Bathtub with ¾ inch spout  | ¾                                   | 7.5                                       | 7.5  | 10    | 7.5                                      | 7.5  | 10    |
| Bedpan washer  | 1                                   | -   | -    | -     | 7.5                                      | 7.5  | 10    |
| Bidet  | ⅜                                   | 1.5                                       | 1.5  | 2     | -  | -    | -     |
| Cothèse washer 3.5 kg  | ½                                   | 1   | 1    | 1.4   | 2.25                                     | 2.25 | 3     |
| Clothes washer 6.8 kg  | ½                                   | -   | -    | -     | 3  | 3    | 4     |
| Cothèse washer, commercial <sup>(5)</sup>                        | -                                   | -   | -    | -     | -  | -    | -     |
| Dental lavatory  | ⅜                                   | -   | -    | -     | 1.5                                      | 1.5  | 2     |
| Dental unit, cuspidor  | ⅜                                   | -   | -    | -     | 1  | -    | 1     |
| Dishwasher, commercial <sup>(5)</sup>                            | -                                   | -   | -    | -     | -  | -    | -     |
| Dishwasher, domestic   | ⅜                                   | -   | 1.4  | 1.4   | -  | -    | -     |
| Drinking fountain or water cooler                                | ⅜                                   | -   | -    | -     | 0.25                                     | -    | 0.25  |
| Hose bibb  | ½                                   | 2.5                                       | -    | 2.5   | 2.5                                      | -    | 2.5   |
| Hose bibb  | ¾                                   | 3   | -    | 3     | 6  | -    | 6     |
| Hose bibb, combination hot and cold                              | ½                                   | 1.9                                       | 1.9  | 2.5   | 1.9                                      | 1.9  | 2.5   |
| Lavatory, 8.3 LPM or less  | ⅜                                   | 0.5                                       | 0.5  | 0.7   | 1.5                                      | 1.5  | 2     |
| Lavatory, greater than 8.3 LPM                                   | ⅜                                   | 0.75                                      | 0.75 | 1     | 1.5                                      | 1.5  | 2     |
| Sink, bar  | ⅜                                   | 0.75                                      | 0.75 | 1     | 1.5                                      | 1.5  | 2     |
| Sink, clinic service faucet                                      | ½                                   | -   | -    | -     | 2.25                                     | 2.25 | 3     |
| Sink, clinic service with direct flush valve                     | 1                                   | -   | -    | -     | 6  | -    | 6     |
| Sink, kitchen commercial, per faucet                             | ½                                   | -   | -    | -     | 3  | 3    | 4     |
| Sink, kitchen domestic, 8.3 LPM                                  | ⅜                                   | 1   | 1    | 1.4   | 1  | 1    | 1.4   |

## NPCC table 2.6.3.2

Reproduced with the permission of the National Research Council of Canada, copyright holder.

| Fixture or Device                                | Minimum Size of Supply Pipe, inches | Private Use Hydraulic Load, fixture units |     |       | Public Use Hydraulic Load, fixture units |      |       |
|--|-------------------------------------|---|-----|-------|--|------|-------|
|  |                                     | Cold                                      | Hot | Total | Cold                                     | Hot  | Total |
| Sink, kitchen domestic, greater than 8.3 LPM     | 3/8                                 | 1.5                                       | 1.5 | 2     | 1.5                                      | 1.5  | 2     |
| Sink, laboratory                                 | 3/8                                 | -   | -   | -     | 1.5                                      | 1.5  | 2     |
| Sink, laundry (1 or 2 compartments)              | 3/8                                 | 1   | 1   | 1.4   | 1  | 1    | 1.4   |
| Sink, service or mop basin                       | 1/2                                 | -   | -   | -     | 2.25                                     | 2.25 | 3     |
| Sink, washup, per faucet                         | 1/2                                 | -   | -   | -     | 1.5                                      | 1.5  | 2     |
| Shower head, 9.5 LPM or less per head            | 1/2                                 | 1   | 1   | 1.4   | 3  | 3    | 4     |
| Shower head, greater than 9.5 LPM per head       | 1/2                                 | 1.5                                       | 1.5 | 2     | 3  | 3    | 4     |
| Shower, spray, multi-head, fixture unit per head | (5)                                 | 1   | 1   | 1.4   | 3  | 3    | 4     |
| Urinal, with direct flush valve                  | 3/4                                 | (6)                                       | -   | (6)   | (6)                                      | -    | (6)   |
| Urinal, with flush tank                          | 3/8                                 | 3   | -   | 3     | 3  | -    | 3     |
| Urinal, with self-closing metering valve         | 1/2                                 | 2   | -   | 2     | 4  | -    | 4     |
| Water closet, 6 LPF or less with flush tank      | 3/8                                 | 2.2                                       | -   | 2.2   | 2.2                                      | -    | 2.2   |
| Water closet, greater than 6 LPF with flush tank | 3/8                                 | 3   | -   | 3     | 5  | -    | 5     |
| Water closet, with direct flush valve            | 1                                   | (6)                                       | -   | (6)   | (6)                                      | -    | (6)   |

### Notes to Table 2.6.3.2.A.:

- (1) The fixture unit values in this Table are not applicable in certain assembly occupancies because of surges in use by the occupants. For such occupancies, refer to specific design information.
- (2) For fixtures not indicated in this Table, refer to Table 2.6.3.2.D.
- (3) Bathroom group is based on a 1/2-inch size bathtub supply pipe.
- (4) Add additional fixture to the fixture load for bathroom group.
- (5) Refer to manufacturer's recommendations.
- (6) For fixture unit values for fixtures with direct flush valves, see Sentence 2.6.3.2.(4) and Tables 2.6.3.2.B. and 2.6.3.2.C.

**Table 2.6.3.2.B.**  
**Sizing of Water Distribution Systems for Urinals with Direct Flush Valves**  
 Forming Part of sentences 2.6.3.2.(4) and 2.6.3.4.(5)

| Number of Valves | Individual Fixture Unit Assigned in Decreasing Value | Fixture Units in Accumulative Values <sup>(1)</sup>   |
|------------------|--|---|
| 1                | 20   | 20  |
| 2                | 15   | 35  |
| 3                | 10   | 45  |
| 4                | 8  | 53  |
| 5 or more        | 5 each   | 58, plus 5 for each additional fixture in excess of 5 |

### Notes to Table 2.6.3.2.B.:

- (1) The accumulative fixture unit values are the total values to be used in conjunction with Table 2.6.3.2.A.

## NPCC table 2.6.3.2

Reproduced with the permission of the National Research Council of Canada, copyright holder.

| Number of Valves | Individual Fixture Unit Assigned in Decreasing Values   | Fixture Units in Accumulative Values <sup>(1)</sup>  |
|------------------|---|--|
| 1                | 40  | 40   |
| 2                | 30  | 70   |
| 3                | 20  | 90   |
| 4                | 15  | 105  |
| 5 or more        | 10 for each public use<br>and<br>6 for each private use | 115, plus 10 for each public use<br>additional fixture excess of 5<br>and<br>111, plus 6 for each private use<br>additional fixture in excess of 5 |

### Notes to Table 2.6.3.2.C.:

(1) The accumulative fixture unit values are the total values to be used in conjunction with Table 2.6.3.2.A.

**Table 2.6.3.2.D.**  
**Hydraulic Loads of Fixtures Not Listed in Table 2.6.3.2.A.**  
Forming Part of Sentences 2.6.3.2.(2) and 2.6.3.4.(5)

| Size of Supply Pipe, Inches | Hydraulic Load, fixture units |            |
|-----------------------------|-------------------------------|------------|
|                             | Private use                   | Public use |
| $\frac{3}{8}$               | 1                             | 2          |
| $\frac{1}{2}$               | 2                             | 4          |
| $\frac{3}{4}$               | 3                             | 6          |
| 1                           | 6                             | 10         |

### 2.6.3.3. Static Pressure

- 1) Where the static pressure at any *fixture* may exceed 550 kPa, a pressure-reducing valve shall be installed to limit the maximum static pressure at the *fixture* to 550 kPa.

### 2.6.3.4. Size

- 1) Every *water service pipe* shall be sized according to the peak demand flow but shall not be less than  $\frac{3}{4}$  inch size.
- 2) Except as provided in Sentence (3), the size of a supply pipe that serves a *fixture* shall conform to Table 2.6.3.2.A.
- 3) For *fixtures* listed in Table 2.6.3.2.A. that have a permitted supply pipe size of  $\frac{3}{8}$  inch, a connector not more than 750mm long and not less than 6.3mm inside diameter may be used to supply water to the *fixture*.
- 4) No *water system* between the point of connection with the *water service pipe* or the water meter and the first *branch* that supplies a water heater that serves more than one *fixture* shall be sized less than  $\frac{3}{4}$  inch.
- 5) Where both hot and cold water is supplied to *fixtures* in residential *buildings* containing one or two *dwelling* units or row houses with separate *water service pipes*, the *water system* may be sized in accordance with Table 2.6.3.4., where
  - a) the hydraulic loads for maximum separate demands on *water distribution system* piping are not less than 100% of the total hydraulic load of the *fixture units* given in Tables 2.6.3.2.A., 2.6.3.2.B., 2.6.3.2.C. or 2.6.3.2.D. for *private use*,
  - b) the minimum water pressure at the entry to the building is 200 kPa, and
  - c) the total maximum length of *water system* is 90 m.



## Chapter 5: System design and layout

This section profiles potable-water design and layout techniques that are primarily found in multi-family and commercial buildings, generally referred to as fire-resistant construction buildings, where both plumbing and building codes apply.

### The Uponor advantage

Designing a building's domestic-water system with Uponor AquaPEX piping and ProPEX fittings delivers a system with many advantages: reliability, cost-effectiveness and code-compliance from a system that meets peak flow demands while conserving water and energy.

Utilizing the smaller inside diameter of SDR9 Uponor PEX piping allows decreased system volume, therefore providing hot water to fixtures in a shorter amount of time

while still meeting end-use fixture requirements. The superior qualities of Uponor PEX deliver a lifetime of corrosion-free system performance.

Designing with multipoint tees and small-dimension ( $\frac{1}{2}$ " to 1") coiled piping reduces the number of behind-the-wall connections in a unit application by 70 percent. Fewer connections mean faster installation times and fewer potential leak points.

Additional features such as a resistance to freeze damage, heat-kink repairability, stable material cost, superior thermal and acoustical properties, and a 25-year limited warranty give the designer additional confidence in choosing an Uponor AquaPEX plumbing system.



Figure 5-1: Uponor PEX-a Pipe Support



Figure 5-2: In-wall piping

### Unit/In-suite piping

Uponor AquaPEX pipe for distributing water to fixtures may be installed overhead, through framing, in slab or below grade. Common design methods for unit piping in multi-family commercial buildings include:

- Trunk and branch
- Home run
- Uponor Logic

## Uponor Logic plumbing

Uponor Logic is the smart way to plumb, using flexible Uponor PEX pipe and multiport tees to minimize connections and maximize system performance. With an Uponor Logic layout, plumbing systems typically require fewer fittings than a trunk and branch design and less pipe than a home run layout.

| Uponor Logic          |              |
|-----------------------|--------------|
| Number of fittings    | 9            |
| Number of connections | 33           |
| Nominal pipe size     | Length (ft.) |
| 1/2"                  | 261          |
| 3/4"                  | 38           |
| 1"                    | 5            |
| Total                 | 304          |

Table 5-1: Uponor Logic pipe and fittings usage

| Home run              |              |
|-----------------------|--------------|
| Number of fittings    | 7            |
| Number of connections | 27           |
| Nominal pipe size     | Length (ft.) |
| 1/2"                  | 475          |
| 3/4"                  | 30           |
| 1"                    | 5            |
| Total                 | 510          |

Table 5-2: Home run pipe and fittings usage

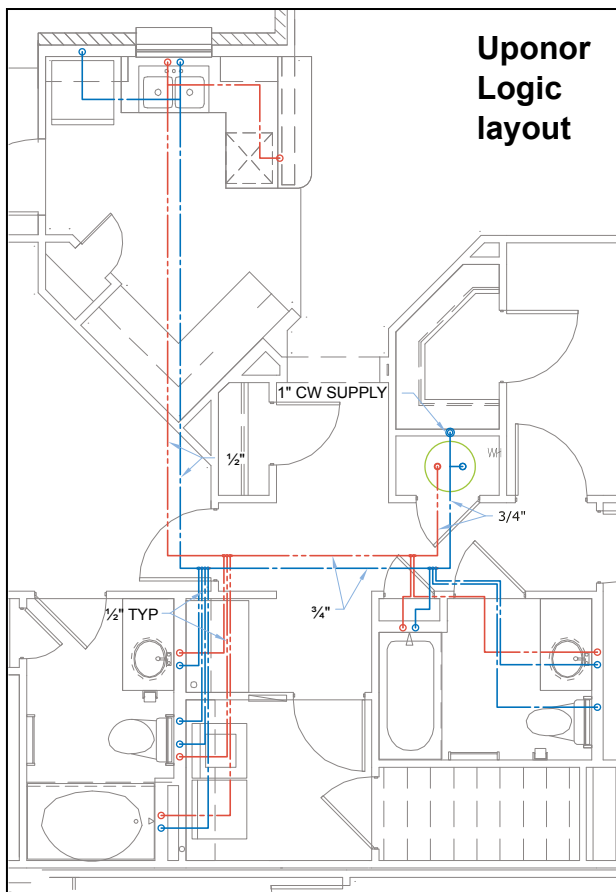


Figure 5-3: Uponor Logic layout

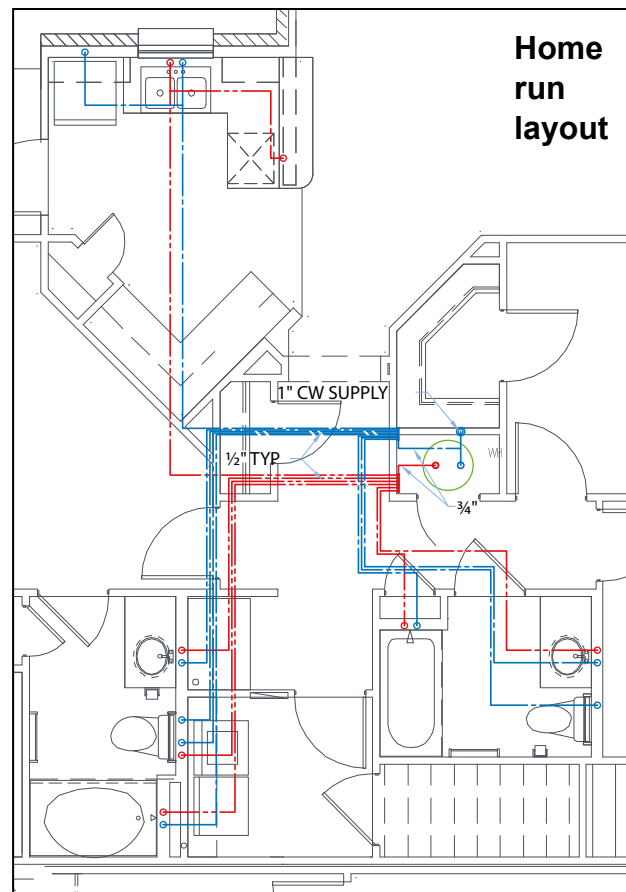


Figure 5-4: Home run layout


**Critical path** = HWS — W.H. to tub    **UPC tub** = 4 wsfu = 4 gpm  
**CWS** = 60°F    **HWS** = 120°F    **Mixed** = 110°F    **Hot-water multiplier** = 0.83 = 3.32 gpm

| System type  | I.D. (in.) |       | Distance (ft.) |      | Volume (gal.) |       |       | Velocity (ft./sec.) |      | Pressure loss (psi) |       |       | First-use HW time to fixture |
|--------------|------------|-------|----------------|------|---------------|-------|-------|---------------------|------|---------------------|-------|-------|------------------------------|
|              | 1/2"       | 3/4"  | 1/2"           | 3/4" | 1/2"          | 3/4"  | Total | 1/2"                | 3/4" | 1/2"                | 3/4"  | Total | Critical path (tub only)     |
| Copper T&B   | 0.527      | 0.745 | 13             | 33   | 0.147         | 0.746 | 0.893 | 4.8                 | 2.43 | 1.22                | 0.561 | 1.781 | 16.1 sec.                    |
| Home run     | 0.475      | 0.671 | 32             | 9    | 0.294         | 0.165 | 0.459 | 5.8                 | 3    | 4.16                | 0.252 | 4.412 | 8.3 sec.                     |
| Uponor Logic | 0.475      | 0.671 | 19             | 17   | 0.174         | 0.312 | 0.486 | 5.8                 | 3    | 2.47                | 0.476 | 2.946 | 8.7 sec.                     |

Table 5-3: Performance comparisons

| Copper trunk and branch |              |
|-------------------------|--------------|
| Number of fittings      | 39           |
| Number of connections   | 93           |
| Nominal pipe size       | Length (ft.) |
| 1/2"                    | 234          |
| 3/4"                    | 73           |
| 1"                      | 5            |
| Total                   | 312          |

**Table 5-4: Copper trunk and branch pipe and fittings usage**

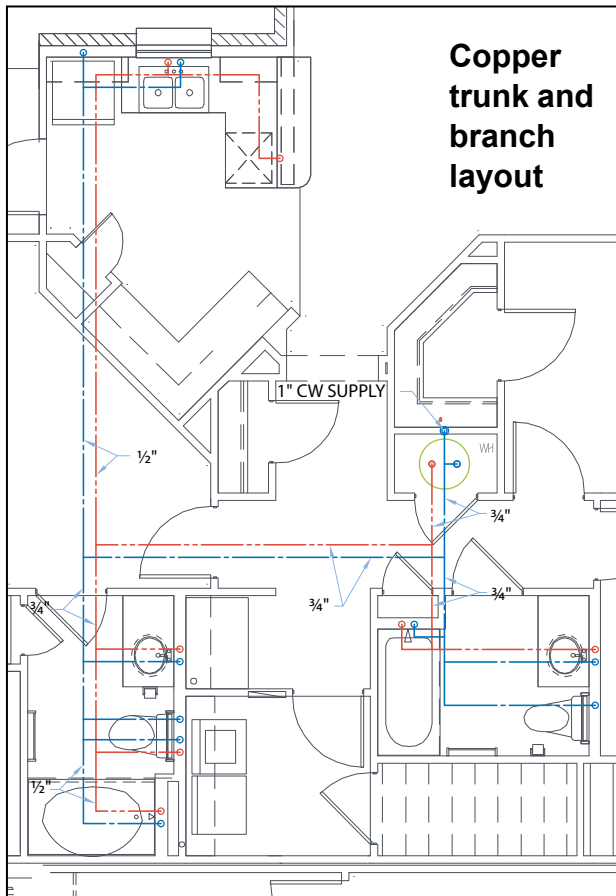




**Figure 5-5: Copper trunk and branch layout**

### Efficiencies of Uponor Logic

For unit and in-suite applications, Uponor Logic reduces the number of fittings by up to 70 percent when compared to copper trunk and branch and requires 40 percent less tubing than a home run system. Uponor offers a full line of EP multiport tees for ultimate design flexibility.

### Hot-water performance

Uponor Logic delivers hot water nearly 46 percent faster than a copper trunk and branch system for the first-use fixture and nearly 43 percent faster than a home run system for the second-use fixture.

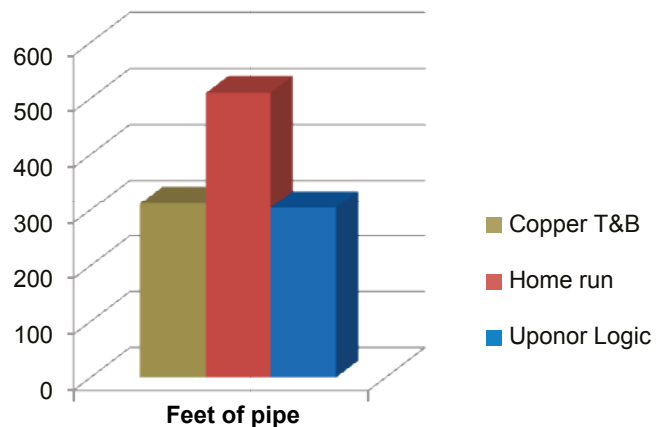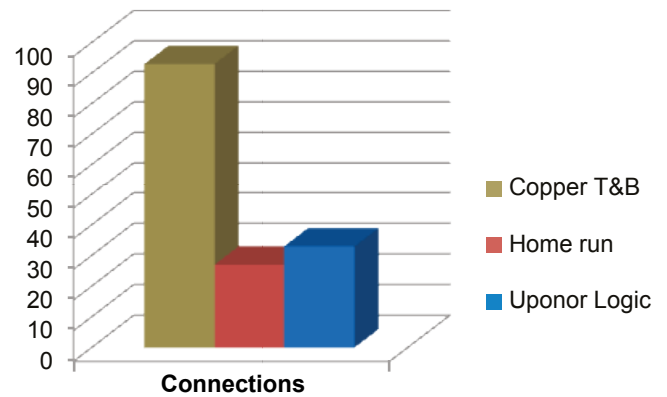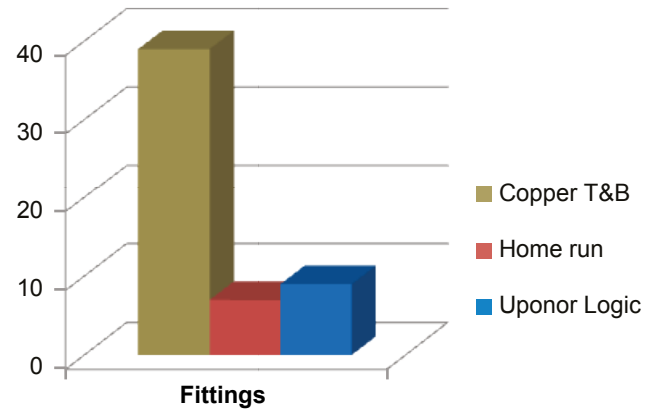

| System type  | First-use HW time to fixture | Second-use HW time to fixture |
|--------------|------------------------------|-------------------------------|
|              | Critical path (tub only)     | Critical path (lav only)      |
| Copper T&B   | 16.1 sec.                    | 4.2 sec.                      |
| Home run     | 8.3 sec.                     | 7.5 sec.                      |
| Uponor Logic | 8.7 sec.                     | 4.3 sec.                      |

**Table 5-5: Hot water time-to-fixture comparisons**

## Reverse osmosis and de-ionized water systems

Reverse-osmosis systems and systems using de-ionized water for drinking water applications are approved for use with Uponor AquaPEX piping granted the pH is between 5 and 8 and the maximum temperature does not exceed 104°F (40°C). Uponor requires the use of EP or stainless-steel fittings with de-ionized and reverse-osmosis water.

For process water applications such as clean labs and other industrial-type pure water applications, please contact Uponor for more information.

## Surge pressure and sound intensity

The main sources of sound in a water piping system are cavitation, surface roughness and water hammer caused by surge pressure. Typical polymers will absorb sound in the range of 10 dB/cm, whereas metals are on the order of 0.1 to 1.0 dB/cm. For a given change in velocity, the intensity of sound from copper pipe will be higher than that of PEX-a piping. Peak pressures caused by a quick-acting valve could be reduced by

18 percent to 40 percent by utilizing Uponor PEX instead of copper pipe.

When comparing the change in sound intensity when switching from copper to PEX piping, with all else remaining the same, the sound intensity in the radial outward direction is the primary area to evaluate.

Beginning with the general wave equation  $I^2 p = (1/c^2)(M^2 p/M t^2)$  and some simplifying assumptions (e.g., point source of sound), the relationship for intensity can be derived with the following formula:

$$I = pv$$

### Where:

I = sound intensity  
p = sound pressure  
v = particle velocity

## Water hammer

Water hammer is probably the most significant concern and can be evaluated using the following:

$$A = 4660 / [1 + kD/(Et)]^{1/2}$$

### Where:

A = Wave velocity  
k = Bulk modulus of water (300,000 psi)  
D = Inside diameter of pipe

E = Tensile modulus of pipe material

t = Wall thickness

For 1/2" nominal size piping, the dimension ratio (D/t) of PEX piping is approximately 7; it is approximately 11 for copper (Type K).

Assuming a PEX piping modulus of 250,000 psi and copper modulus of 16,000,000 psi, the wave velocity is:

PEX piping – 1,520 ft./sec.

Copper piping – 4,240 ft./sec.

The surge pressure is calculated as  $P = Av/(2.31 g)$ , where v is the water velocity prior to the valve closing and g = 32.2. Assuming this is also the sound pressure (i.e., no losses), the sound intensity can be calculated as:  $I = (A^2)(v)/74.4$

For PEX piping, I = 31,000 (v)

For copper piping, I = 242,000 (v)

This demonstrates that for a given change in water velocity, the intensity of the sound

from copper piping will be approximately eight times that of the PEX piping. While some assumptions are made in reaching this conclusion, even a conservative estimate would give copper piping a sound intensity two to four times that of PEX piping.

## Water hammer arrestors

When considering the need to install water hammer arrestors, there are two components of water hammer that are of significance: surge pressure and noise transmission. The intent of water hammer arrestors is to reduce the surge pressure to 150 psi and to minimize the amount of noise transmission.

The International Plumbing Code (IPC) and the Uniform Plumbing Code (UPC) both require water hammer arrestors at quick-closing valve locations. **Tables 5-6 and 5-7** show surge pressure for copper, chlorinated polyvinyl chloride (CPVC) and PEX.

| Pipe material      | Maximum measured pressure (psi) |     |     |     |     |     |
|--------------------|---------------------------------|-----|-----|-----|-----|-----|
|                    | Flow rate, gpm                  | 2   | 2.5 | 3   | 4   | 6   |
| 1/2" Uponor PEX    |                                 | 136 | 150 | 169 | 193 | 244 |
| 1/2" PEX-b         |                                 | 143 | 168 | 177 | 212 | 274 |
| 1/2" CPVC          |                                 | 155 | 173 | 201 | 222 | 296 |
| 1/2" Type L Copper |                                 | 194 | 239 | 266 | 318 | 422 |

**Table 5-6: First peak pressure for each piping material and flow rate (cold water)**

1. Pressure response measurements include 60 psi static pressure.
2. Closing speed of quick-acting valve estimated at 25 milliseconds.
3. Test performed at 54°F/12.2°C (cold water temperature).

*Surge Pressure in Plumbing Pipe Materials, PPI Report # 3285*

| Pipe material      | Maximum measured pressure (psi) |     |     |     |     |     |
|--------------------|---------------------------------|-----|-----|-----|-----|-----|
|                    | Flow rate, gpm                  | 2   | 2.5 | 3   | 4   | 6   |
| 1/2" Uponor PEX    |                                 | 113 | 122 | 123 | 141 | 174 |
| 1/2" PEX-b         |                                 | 108 | 113 | 124 | 141 | 175 |
| 1/2" CPVC          |                                 | 142 | 157 | 174 | 203 | 252 |
| 1/2" Type L Copper |                                 | 149 | 181 | 204 | 250 | 306 |

**Table 5-7: First peak pressure for each piping material and flow rate (hot water)**

1. Pressure response measurements include 60 psi static pressure.
2. Closing speed of quick-acting valve estimated at 25 milliseconds.
3. Test performed at 130°F/54.4°C (hot water temperature).

*Surge Pressure in Plumbing Pipe Materials, PPI Report # 3285*

These tables show the surge pressure in Uponor PEX is about 38 percent less than the surge pressure in copper. The main reason for the dramatic difference in these results is the flexibility of Uponor PEX piping. Because of its flexibility, Uponor PEX piping significantly dampens surge pressure.

## Hot-water system design

Uponor AquaPEX piping is tested and listed to PEX 5106 NSF-pw (CL5). Per ASTM F876, the CL5 chlorine resistance rating is intended for an end-use condition of 100 percent at 140°F/60°C, which is the highest chlorine-resistance rating available through ASTM. Products marked with a '5' in the first digit of the four-digit code and also bearing the CL5 designation [e.g., PEX 5106 NSF-pw (CL5)] indicate the product is approved for use in continuous, domestic, hot-water circulation systems with up to 140°F/60°C water temperatures.

## Recirculated hot-water systems

To maintain satisfactory temperatures, hot-water systems are often recirculated. Several recirculating methods are available:

- **Manual control** — Should be used only when hot water is needed 24 hours a day. If that is not the case, manual control is not cost-effective.
- **Thermostatic aquastat** — Used to shut off the pump during peak demands of hot water when circulation is not needed.
- **Timed** — Utilized during specific hours of operation when people are most likely to use hot-water fixtures.
- **Combination aquastat/timed** — Combines the capabilities of the aquastat system with timed control, reducing energy consumption.

Uponor AquaPEX is rated for use in continuous-circulation domestic-water systems with temperatures up to 140°F/60°C.

### Sizing and maximum velocity

Uponor requires that the velocity of the dedicated recirculation piping shall not exceed 2 ft./sec. and that the hot-water piping system (which includes the recirculation lines) meets the following requirements stated in the *ASPE Plumbing Engineering Design Handbook, Volume 2, Plumbing Systems*:

1. Calculate the heat loss rates of the hot-water supply piping.
2. Calculate the heat loss rates of the hot-water circulating piping.
3. Calculate the circulation rates for all parts of the circulating piping and the total circulation rate required.
4. Determine the allowable uniform friction head loss and the total head required to overcome friction losses in the piping when the water is flowing at the required circulation rate.
5. Calculate the rates of flow for various piping sizes that will give the uniform pressure drop established in **Step 4**, and tabulate the results.
6. Size the system based upon the tabulation set up in **Step 5**.
7. With the sizes established in **Step 6**, repeat **Steps 2 through 6** as a check on the assumptions made.

While Uponor recommends the more accurate process above, the following streamlined method is also available:

1. Allow ½ gpm for each small hot-water riser (¾" to 1"), 1 gpm for each medium-sized hot-water riser (1¼" to 1½"), and 2 gpm for each large-sized hot-water riser (2" and larger).
2. Add 1 gpm for each group of 20 hot-water-supplied fixtures.

## Balancing of recirculated hot-water systems

Circulated hot-water systems require balancing to maintain satisfactory system temperatures. If systems are not properly balanced, circulated water has the

tendency to short circuit through the shortest loop in the system, thus creating high velocities in that loop and resulting in hot water delays to remote loops. Hot-water recirculated lines should be insulated, and they typically require little flow to maintain satisfactory system temperatures. Uponor limits maximum velocity to 2 ft./sec. in dedicated hot-water return piping using Uponor AquaPEX (see **Table 5-8**).

For system balancing, use calibrated devices such as balancing valves. Each balancing valve requires a check valve, either in-line or incorporated into the balancing valve assembly, to prevent reverse flow.

| Nominal pipe size | Velocity (ft./sec.) | Flow rate (gpm) | Friction loss per foot at 120°F/48.9°C |
|-------------------|---------------------|-----------------|--|
| ½"                | 2                   | 1.1             | 0.0195                                 |
| ¾"                | 2                   | 2.2             | 0.0126                                 |
| 1"                | 2                   | 3.6             | 0.0092                                 |
| 1¼"               | 2                   | 5.4             | 0.0072                                 |
| 1½"               | 2                   | 7.5             | 0.0059                                 |
| 2"                | 2                   | 12.9            | 0.0042                                 |
| 2½"               | 2                   | 19.8            | 0.0033                                 |
| 3"                | 2                   | 28.1            | 0.0026                                 |

**Table 5-8: Uponor AquaPEX flow rates at 2 ft./sec.**

## Heat trace

Uponor approves the use of heat-trace cables with Uponor PEX products, provided the product has automatic thermostatic control capability and the temperature does not exceed the maximum rating listed on the piping (200°F/93.3°C). Wrap heat tape around the piping and secure the cable with plastic cable ties, not tape; then insulate with either closed-cell or fiberglass pipe insulation

## Thermal conductivity

Uponor PEX pipe has a very low coefficient of thermal conductivity: 0.219 Btu/(h•ft•°F). In comparison, copper has a coefficient of thermal conductivity between 173 and 231 Btu/(h•ft•°F), depending on wall thickness (Type K, L or M). Therefore, Uponor PEX piping does not sweat like copper.

| Nominal pipe size | R-value |
|-------------------|---------|
| ½"                | 0.03    |
| ¾"                | 0.04    |
| 1"                | 0.052   |
| 1¼"               | 0.063   |
| 1½"               | 0.075   |
| 2"                | 0.098   |
| 2½"               | 0.122   |
| 3"                | 0.144   |

**Table 5-9: SDR9 PEX R-value**

Uponor PEX has superior insulating qualities when compared to copper in the same application. Even though the difference in R-value is relatively small, the higher R-value of Uponor PEX piping will always result in less heat loss than with the same nominal-size copper pipe.

| Pipe   | Btu/(h•ft•°F) |
|--------|---------------|
| Copper | 173-231       |
| PEX-a  | 0.219         |
| CPVC   | 0.079         |

**Table 5-10: Thermal conductivity of piping materials**

When comparing samples of the same thickness, CPVC has a lower thermal conductivity than Uponor PEX. To represent these values in the form of a pipe wall, we must compare the conductivity through a CTS SDR9 Uponor PEX pipe wall to that of a CTS SDR11 CPVC wall; SDR9 is 22 percent thicker than SDR11.

When conductivity is applied to the pipe wall thickness, Uponor PEX is within two percent of the thermal resistance of CPVC.

## Insulation

Uponor recommends insulating all domestic hot-water supply and return piping as well as any hydronic heating and cooling piping to conserve energy and maintain desired fluid temperature. Uponor also recommends insulating any piping installed in an unconditioned space or poorly ventilated areas with excessive moisture content. Always comply with local and energy codes.

## Pre-insulated Uponor AquaPEX piping

Pre-insulated Uponor AquaPEX piping, which is available in coils or straight lengths, features closed-cell polyethylene insulation to make hot and cold potable-water distribution systems more efficient. The insulation can also help meet energy-code requirements; check with local code authorities regarding energy-code requirements for specific applications.

Pre-insulated Uponor AquaPEX is available in the following sizes:

- ½" to 2" with ½" thick insulation
- ½" to 1¼" with 1" thick insulation
- 1½" to 2" with 1½" thick insulation

**Note:** When using Pre-insulated Uponor AquaPEX in direct-burial applications, Uponor recommends using a minimum 1" thick insulation due to soil compression forces.

| Pre-insulated Uponor AquaPEX with ½" insulation |                      |         |                       |
|---|----------------------|---------|-----------------------|
| Tubing size                                     | Insulation thickness | R-value | Heat loss at 70°F Δ T |
| ½"  | 0.6" (15mm)          | 3.9     | 7.4 Btu/(hr • ft)     |
| ¾"  | 0.6" (15mm)          | 3.6     | 9.0 Btu/(hr • ft)     |
| 1"  | 0.6" (15mm)          | 3.4     | 10.6 Btu/(hr • ft)    |
| 1¼"   | 0.6" (15mm)          | 3.3     | 12.1 Btu/(hr • ft)    |
| 1½"   | 0.6" (15mm)          | 3.2     | 13.6 Btu/(hr • ft)    |
| 2"  | 0.6" (15mm)          | 3.1     | 16.5 Btu/(hr • ft)    |

**Table 5-11: Pre-insulated Uponor AquaPEX with ½" polyethylene insulation R-value/heat loss**

**Note:** Pre-insulated Uponor AquaPEX consists of PEX-a pipe and closed cell, crosslinked polyethylene insulation with a thermal conductivity of 0.25 Btu•in/(hr•ft²•°F).

| Pre-insulated Uponor AquaPEX with 1" insulation |                      |         |                       |
|---|----------------------|---------|-----------------------|
| Tubing size                                     | Insulation thickness | R-value | Heat loss at 70°F Δ T |
| ½"  | 1.0" (25mm)          | 7.5     | 6.3 Btu/(hr • ft)     |
| ¾"  | 1.1" (28mm)          | 7.9     | 7.1 Btu/(hr • ft)     |
| 1"  | 1.0" (25mm)          | 6.4     | 8.8 Btu/(hr • ft)     |
| 1¼"   | 1.0" (25mm)          | 6.1     | 10.0 Btu/(hr • ft)    |

**Table 5-12: Pre-insulated Uponor AquaPEX with 1" polyethylene insulation R-value/heat loss**

| Pre-insulated Uponor AquaPEX with 1½" insulation |                      |         |                       |
|--|----------------------|---------|-----------------------|
| Tubing size                                      | Insulation thickness | R-value | Heat loss at 70°F Δ T |
| 1½"  | 1.7" (42mm)          | 11.2    | 7.0 Btu/(hr • ft)     |
| 2"   | 1.6" (40mm)          | 9.9     | 8.6 Btu/(hr • ft)     |

**Table 5-13: Pre-insulated Uponor AquaPEX with 1½" polyethylene insulation R-value/heat loss**

## Uponor PEX vs. copper heat loss comparison — Btu/(hr·ft)

|                    |     | Delta T (°F)                  | 20    |      |      |      | 40    |       |      |      | 60    |       |       |       | 80     |       |       |       | 100    |       |       |       |
|--------------------|-----|-------------------------------|-------|------|------|------|-------|-------|------|------|-------|-------|-------|-------|--------|-------|-------|-------|--------|-------|-------|-------|
|                    |     | Insulation thickness (K=0.24) | 0"    | ½"   | 1"   | 1½"  | 0"    | ½"    | 1"   | 1½"  | 0"    | ½"    | 1"    | 1½"   | 0"     | ½"    | 1"    | 1½"   | 0"     | ½"    | 1"    | 1½"   |
| Nominal pipe sizes | ½"  | Uponor PEX                    | 5.44  | 2.22 | 1.63 | 1.37 | 10.89 | 4.44  | 3.25 | 2.74 | 16.33 | 6.65  | 4.88  | 4.10  | 21.78  | 8.87  | 6.51  | 5.47  | 27.22  | 11.09 | 8.13  | 6.84  |
|                    |     | Type L copper                 | 5.76  | 2.24 | 1.63 | 1.37 | 11.52 | 4.47  | 3.27 | 2.74 | 17.27 | 6.71  | 4.90  | 4.11  | 23.03  | 8.95  | 6.53  | 5.48  | 28.79  | 11.18 | 8.16  | 6.85  |
|                    | ¾"  | Uponor PEX                    | 7.48  | 2.73 | 1.95 | 1.61 | 14.96 | 5.47  | 3.89 | 3.21 | 22.44 | 8.20  | 5.84  | 4.82  | 29.92  | 10.94 | 7.78  | 6.43  | 37.40  | 13.67 | 9.73  | 8.03  |
|                    |     | Type L copper                 | 8.06  | 2.77 | 1.96 | 1.61 | 16.12 | 5.54  | 3.91 | 3.22 | 24.18 | 8.31  | 5.87  | 4.84  | 32.25  | 11.07 | 7.83  | 6.45  | 40.31  | 13.84 | 9.78  | 8.06  |
|                    | 1"  | Uponor PEX                    | 9.42  | 3.23 | 2.25 | 1.83 | 18.85 | 6.47  | 4.50 | 3.66 | 28.27 | 9.70  | 6.75  | 5.49  | 37.69  | 12.93 | 8.99  | 7.33  | 47.11  | 16.17 | 11.24 | 9.16  |
|                    |     | Type L copper                 | 10.36 | 3.29 | 2.27 | 1.84 | 20.73 | 6.58  | 4.53 | 3.68 | 31.09 | 9.86  | 6.80  | 5.52  | 41.46  | 13.15 | 9.06  | 7.36  | 51.82  | 16.44 | 11.33 | 9.20  |
|                    | 1¼" | Uponor PEX                    | 11.29 | 3.72 | 2.54 | 2.05 | 22.58 | 7.44  | 5.08 | 4.09 | 33.87 | 11.16 | 7.63  | 6.14  | 45.16  | 14.88 | 10.17 | 8.19  | 56.45  | 18.60 | 12.71 | 10.24 |
|                    |     | Type L copper                 | 12.67 | 3.80 | 2.57 | 2.06 | 25.34 | 7.60  | 5.14 | 4.12 | 38.00 | 11.40 | 7.70  | 6.18  | 50.67  | 15.20 | 10.27 | 8.24  | 63.34  | 19.00 | 12.84 | 10.30 |
|                    | 1½" | Uponor PEX                    | 13.08 | 4.20 | 2.83 | 2.26 | 26.15 | 8.40  | 5.66 | 4.51 | 39.23 | 12.60 | 8.49  | 6.77  | 52.30  | 16.79 | 11.31 | 9.03  | 65.38  | 20.99 | 14.14 | 11.28 |
|                    |     | Type L copper                 | 14.97 | 4.31 | 2.86 | 2.27 | 29.94 | 8.61  | 5.73 | 4.55 | 44.91 | 12.92 | 8.59  | 6.82  | 59.89  | 17.23 | 11.45 | 9.10  | 74.86  | 21.53 | 14.32 | 11.37 |
|                    | 2"  | Uponor PEX                    | 16.46 | 5.13 | 3.39 | 2.66 | 32.93 | 10.27 | 6.77 | 5.33 | 49.39 | 15.40 | 10.16 | 7.99  | 65.85  | 20.54 | 13.55 | 10.65 | 82.31  | 25.67 | 16.94 | 13.32 |
|                    |     | Type L copper                 | 19.58 | 5.31 | 3.45 | 2.69 | 39.16 | 10.63 | 6.89 | 5.38 | 58.73 | 15.94 | 10.34 | 8.08  | 78.31  | 21.25 | 13.78 | 10.77 | 97.89  | 26.57 | 17.23 | 13.46 |
|                    | 2½" | Uponor PEX                    | 19.30 | 5.92 | 3.92 | 3.00 | 38.60 | 11.85 | 7.84 | 6.01 | 57.90 | 17.77 | 11.76 | 9.01  | 77.20  | 23.69 | 15.68 | 12.01 | 96.50  | 29.61 | 19.60 | 15.01 |
|                    |     | Type L copper                 | 24.20 | 6.32 | 4.09 | 3.10 | 48.41 | 12.63 | 8.18 | 6.20 | 72.61 | 18.95 | 12.26 | 9.30  | 96.82  | 25.26 | 16.35 | 12.40 | 121.02 | 31.58 | 20.44 | 15.50 |
|                    | 3"  | Uponor PEX                    | 22.54 | 6.94 | 4.47 | 3.44 | 45.07 | 13.88 | 8.93 | 6.89 | 67.61 | 20.82 | 13.40 | 10.33 | 90.14  | 27.76 | 17.86 | 13.77 | 112.68 | 34.70 | 22.33 | 17.22 |
|                    |     | Type L copper                 | 28.79 | 7.31 | 4.59 | 3.50 | 57.58 | 14.62 | 9.17 | 7.01 | 86.37 | 21.93 | 13.76 | 10.51 | 115.16 | 29.24 | 18.35 | 14.01 | 143.95 | 36.55 | 22.93 | 17.51 |

**Table 5-14: Uponor PEX vs. copper heat loss comparison — Btu/(hr·ft)**

1. All calculations based on cylindrical thermal resistance methodology (ASPE/ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity. This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.



Uponor Ecoflex  
potable PEX pipe



Uponor Ecoflex  
potable HDPE pipe



Uponor Ecoflex  
potable plus pipe

## Uponor Ecoflex® products

### Ecoflex potable PEX pipes

Ecoflex potable PEX pipes feature a single Uponor AquaPEX service pipe for potable-water distribution applications. The piping is surrounded by multi-layer, closed-cell, PEX-foam insulation and a water-resistant, corrugated, HDPE jacket, making it ideal for water service and other direct-burial applications. Ecoflex potable PEX pipes use ProPEX fittings up to 3" or WIPEX™ fittings. For more information about Ecoflex, please refer to the Ecoflex Design and Installation Manual.

Ecoflex potable PEX pipes are available in the following sizes:

- 1" in coils up to 600 ft.
- 1¼" in coils up to 500 ft.
- 1½" to 3" in coils up to 300 ft.
- Longer and custom lengths are also available

### Ecoflex potable HDPE pipes

Ecoflex Potable HDPE pipes feature a single high-density polyethylene (HDPE) service pipe in ASTM sizes. This pipe is the economical solution for pre-insulated distribution for chilled-water, cooling and low-temperature heating applications. The HDPE service pipe does not have an oxygen barrier, and it is manufactured in accordance with the following standards:

- PE 3408 or PE 4710
- ASTM D3035 or F714 C3
- AWWA C901 or C906
- NSF-61 and NSF-pw

The piping is surrounded by multi-layer, closed-cell, PEX-foam insulation and water-resistant, corrugated HDPE jacket, making it ideal for direct-burial applications.

Ecoflex potable HDPE pipes can use Uponor's selection of HDPE fittings as well as standard SDR11 fittings from other manufacturers.

Ecoflex potable HDPE pipes are available in 300-foot coils in the following sizes:

- 1¼"
- 1½"
- 2"
- 3"
- 4"
- Longer and custom lengths are also available

### Ecoflex potable plus pipes

Ecoflex potable plus pipes feature Uponor AquaPEX service pipe with a self-regulating heating cable. The pipe and cable are surrounded by multi-layer, closed-cell, PEX-foam insulation and a water-resistant, corrugated, HDPE jacket, making it ideal for direct-burial applications.

Ecoflex potable plus pipes are available in 1¼" pipe sizes with a 5.5" jacket or on a made-to-order basis. Contact Uponor Customer Service at 800.321.4739 (U.S.) or 888.994.7726 (Canada) for details.



## Thermal expansion and contraction

All piping systems expand and contract at different rates depending on material characteristics. PEX piping systems exhibit a higher expansion and contraction rate when subjected to changes in temperature as compared to metallic piping systems. Because of its lower modulus of elasticity, PEX is less rigid than metallic piping and develops less force than metallic pipe when exposed to temperature changes.

For this reason, Uponor PEX can be easily restrained by installing PEX-a Pipe Support. With proper strapping, PEX-a Pipe Support can lessen the need for numerous directional changes and expansion loops as the pipe will absorb much of the expansion stresses. Allowing for controlled expansion and contraction in multiple parts of a piping system is an accepted means of preventing added stresses in other parts of the system that could compromise system performance, damage the structural integrity of the piping components, or damage the structure that support the piping.

Including design elements to address changes in pipe

length will redistribute the stresses that would otherwise result in uncontrolled thermal movement. According to Plastics Pipe Institute (PPI) TR-21 *Thermal Expansion and Contraction in Plastics Piping Systems*, the design and installation of a plastic piping system often requires special attention to thermal expansion and contraction.

### Free-body coefficient

The free-body coefficient of expansion is a calculated, theoretical value in which all of the surfaces would be free of friction and contain no end or branch connections. The free-body coefficient of expansion for PEX-a piping is 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m). For a given change in temperature, the theoretical expansion and contraction can be easily calculated for a given length of piping. In practice, the free-body condition for installed piping is unlikely as all surfaces would need to be free of friction.

Installation of piping in the field requires supports, strapping and bracing that inherently apply friction to the pipe surfaces, therefore, restraining pipe movement. In addition, it takes much more time for PEX-a piping to

reach temperature equilibrium due to its coefficient of thermal conductivity and wall thickness. Thermal expansion in PEX-a piping is more likely to occur in the middle temperature range than at the extremes produced by operating water temperatures. Therefore the free-body coefficient is a very conservative means of calculating pipe movements in installed conditions.

### Test validation

Uponor has tested a variety of suspended PEX piping assemblies to determine which type of expansion solution works best for most applications. The results strongly support the use of PEX-a Pipe Support in conjunction with fixed anchor points positioned every 65' for hot-water and every 150' for cold-water plumbing systems. Pipe runs installed in this manner experience 89 percent to 93 percent reduction in thermal expansion. The two scenarios outlined in **Table 5-15** detail the installation of these pipe runs. The strut and strut clamps experienced the most reduction in expansion (93 percent) because of the snug grip and increased friction from pipe clamps yielding an

effective expansion rate of 0.08"/10°F ΔT/100 ft; clevis or loop type hangers offered an 89 percent reduction yielding an effective expansion rate of 0.12"/10°F ΔT/100 ft. The thermal expansion rate for copper is 0.11"/10°F ΔT/100 ft so using PEX-a Pipe Support with Uponor PEX makes the piping system perform very similarly to copper with respect to thermal expansion.

The highest force measured at fixed anchor points during these tests was 173 lbs., which is much less than the guided force of metallic piping. Properly braced fixed anchor points and commonly specified drop-in anchors, beam clamps or similar fastening components for metallic piping are of sufficient strength to support the PEX install.

Given the flexible nature of PEX pipe, a slight snaking pattern may be experienced even when PEX-a Pipe Support is utilized to control expansion. This is considered normal and does not affect the integrity of system. Pipe insulation can help to minimize the aesthetics of a slight snake in the pipe run.

| Effects of thermal expansion with PEX-a Pipe Support |                        |              |                 |                |                  |  |                        |
|--|------------------------|--------------|-----------------|----------------|------------------|--|------------------------|
| Scenario   | Water temperature (°F) | Delta T (°F) | Support spacing | Anchor spacing | Linear expansion | Expansion rate (inches per 100' per 10°F ΔT) | Reduction vs. bare PEX |
| Strut and strut clamps                               | 180                    | 105          | 96"             | 65'            | ½"               | 0.08   | 93%                    |
| Loops and clevis                                     | 175                    | 100          | 96"             | 65'            | ¾"               | 0.12   | 89%                    |

**Table 5-15: Uponor PEX thermal expansion test results**

Ensure the piping layout, including anchors, adequately isolates joints, fittings and connections from high-thrust or bending forces.

Uponor ProPEX connections have a very high resistance to pull-out forces when compared to other various joint types. The best solution for absorbing expansion and contraction in Uponor PEX piping systems is proper support and to build in flexibility. In applications where long piping runs may be exposed to large temperature changes, the resulting expansion and contraction must be absorbed by additional means such as expansion loops, arms and offsets or by restraining the pipe in a continuous run of PEX-a Pipe Support. Piping runs between anchors and expansion compensating devices must be periodically supported, at a spacing defined by code, with hangers or supports that allow for movement of the piping. The compensating device relieves

axial stress in a straight run of piping by transferring it into a moderate bending stress, thereby absorbing the expansion stress.

#### Above-ground and suspended applications

In single-family and low-rise residential applications, thermal expansion is generally not an issue due to the use of smaller-diameter piping that absorbs expansion and contraction forces due to the routing, supporting methods and flexible nature of Uponor PEX piping. Smaller diameter ( $\frac{3}{8}$ " to 1") pipe runs require an extra  $\frac{1}{8}$ " to  $\frac{3}{16}$ " of longitudinal clearance per foot of run. Do not allow piping to dip excessively between supports and do not pull piping tight during installation.

Larger suspended commercial systems are often designed to include a number of changes in direction. These directional changes can be a beneficial aspect in the piping system by creating a spring-like effect, which safely absorbs and

controls thermal expansion and contraction.

#### Controlling expansion in hot-water systems


Best practice for controlling expansion forces is to continuously restrain the pipe by installing Uponor PEX-a Pipe Support. Install PEX-a Pipe Support in accordance with the installation guidelines on **pages 68-72 in Chapter 6**. For best results, terminate PEX-a Pipe Support segments only at fitting locations. Refer to **Table 6-6 on page 70** for minimum distance to fittings.

Proper use of strapping is critical when using this technique. Strapping shall be:

- Nylon-coated stainless-steel with a minimum tensile rating of 300 lbs.
- Rated for operating temperature ranges, including high temperatures
- UV-resistant to withstand expected life of the piping system

To account for expansion, use fixed anchor points to restrict piping movement. Fixed anchor points shall be:

- Installed every 65 ft. (19.8m)
- Constructed with materials that provide rigidity (see **Figure 5-6**)
- Used with a pipe clamp that will restrain piping material
- Installed within 18" of a fire-rated wall penetration (see **Figure 5-7**)

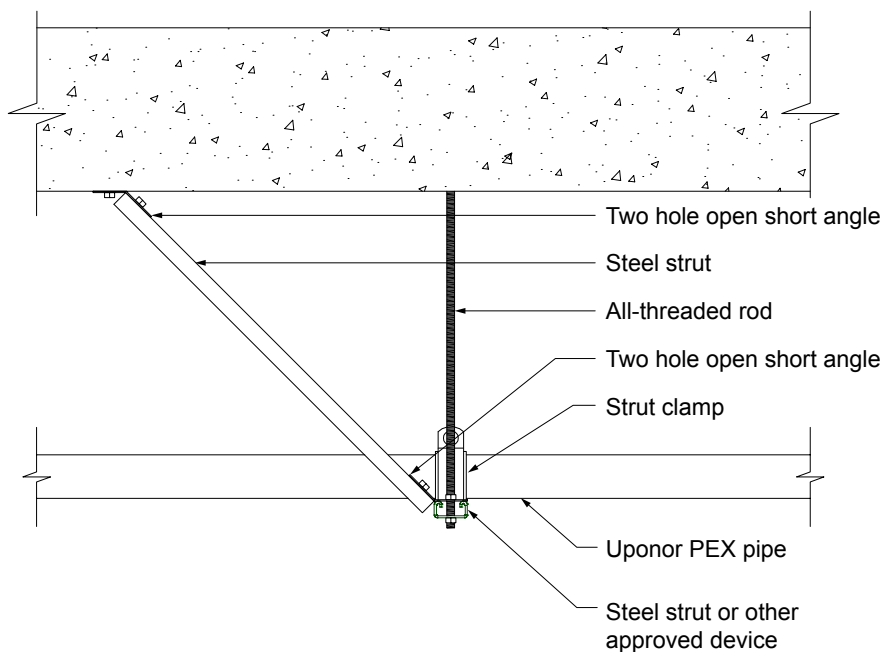

**Figure 5-6: Fixed anchor point**

### Controlling expansion in cold-water systems

Best practice for controlling expansion forces is to continuously restrain the pipe by installing Uponor PEX-a Pipe Support. Domestic cold water systems do not typically experience the temperature differentials seen in domestic hot-water systems, therefore requiring fewer fixed anchor points. Install PEX-a Pipe Support in accordance with the installation guidelines in **Chapter 6**.

Strapping shall be:

- Nylon-coated stainless-steel with a minimum tensile rating of 300 lbs.
- Rated for operating temperature ranges
- UV-resistant to withstand expected life of the piping system

To account for expansion, use fixed anchor points to restrict piping movement. Fixed anchor points shall be:

- Installed every 150 ft. (45.7m)


- Constructed with materials that provide rigidity (see **Figure 5-6**)
- Used with a pipe clamp that will restrain piping material
- Installed within 18" of a fire-rated wall penetration (see **Figure 5-7**)

### Expansion and contraction: risers


Vertical piping runs must comply with support spacing as defined by code (see **Figure 6-40 on page 80**). Best practice is to utilize the floor assembly as an anchor point

for controlling expansion and contraction by means of riser clamps. Do this by utilizing an additional riser clamp at the top of the floor assembly as listed below:

- Domestic hot water: top of every-other floor (see **Figure 6-40 on page 80**)
- Domestic cold water: top of every fourth floor

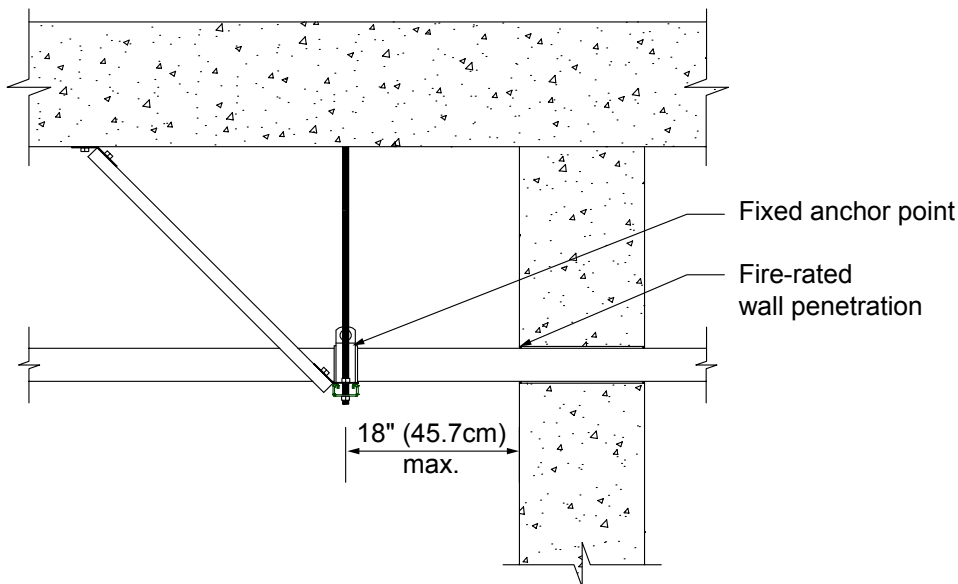

**Figure 5-7: Fixed anchor point — fire-rated wall penetration**

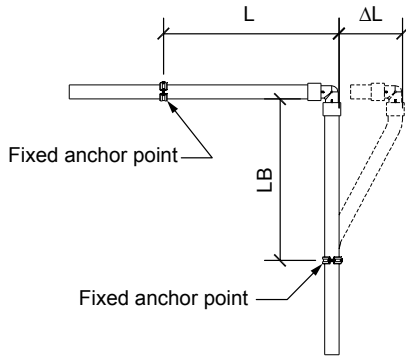

**Figure 5-8: Expansion arm**

**Expansion arm**

The flexible arm should be long enough to prevent damage, and support clamps should be placed far enough from the wall to allow for longitudinal thermal expansion (see **Figure 5-8**).


Use the formula below to calculate the minimum length of the expansion arm:  $LB = C \times \text{SQRT}(D \times \Delta L)$

**Where:**

- L is total distance of piping run from a fixed anchor point to a corner, or in the case of an expansion loop, from a fixed anchor point to a fixed anchor point.
- LB is the flexible arm in inches.
- C is the material constant (12 for PEX).
- D is the outside diameter of the piping.
- ΔL is the thermal-expansion length in inches.

**Expansion arm example:**

Uponor AquaPEX piping with an outside diameter of 1.625" is installed running a length of 75 ft. The hot water it carries is 120°F/48.9°C, and the ambient temperature is 60°F/15.6°C. Calculate the length of the flexible arm. PEX piping expands at a rate of 1.1" per 10°F temperature change per 100 ft. of piping (27.94mm per

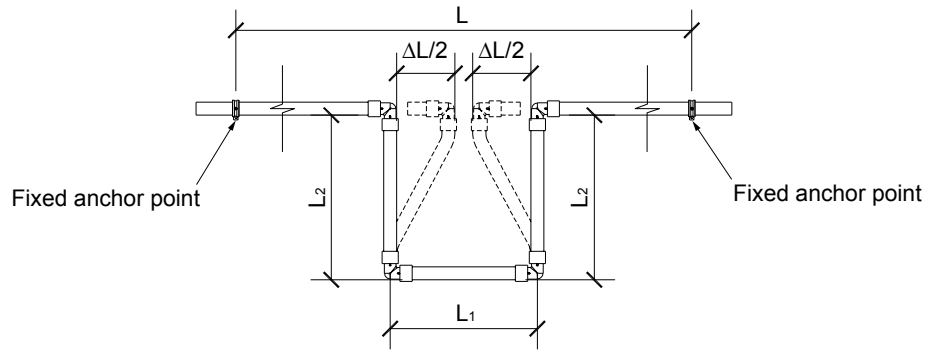

**Figure 5-9: Expansion loop**

5.56°C temperature change per 30.48m of piping).

$$LB = C \times \sqrt{(D \times \Delta L)}$$

$$LB = 12 \times \sqrt{(1.625" \times (1.1" \times (60/10)/(100 \text{ ft./ } L)))}$$

$$LB = 12 \times \sqrt{(1.625" \times 4.95")}$$

$$LB = 12 \times 2.84"$$

$$LB = 34.08"$$

The required arm length (LB) is 34.08" to prevent excessive stress on the fittings and support clamps.

For a list of calculated flexible arm lengths, refer to **Appendix E**.

**Expansion loop**

The same equation applies for an expansion loop. However, the arm length (LB) must be divided into three sections using the following formula:  $LB = 5L1$

**Expansion loop example:**

$$5L1 = 34.08"$$

$$L1 = 34.08/5$$

$$L1 = 6.82"$$

$$L2 = 2 L1$$

$$L2 = 13.63"$$

For a list of calculated expansion loop legs, refer to **Appendix E**.

**Thermal expansion in underground applications**

For direct-burial applications, mitigate the effects of thermal expansion by incorporating proper installation techniques that provide adequate resistance to axial stress.

Per PPI TR-21 *Thermal Expansion and Contraction in Plastic Piping Systems*, a buried or concrete-encased pipe is effectively restrained against both lateral and axial movement by surrounding embedment material. The magnitude of the frictional restraining force is dependent on the nature of the soil and on installation and operating conditions. For example, the extent of compaction near the pipe can affect the quality of contact between the pipe and surrounding soil.

The anchoring or restraining effect of surrounding soil on pipe movement can be significantly augmented by external pipe geometry. Tees, lateral connections and changes in direction all help to anchor a pipe in the surrounding soil.

Because the friction between the pipe and surrounding material is generally sufficient to arrest axial pipe movement, a buried pipe that is subject to typical fluctuations in the

temperature of the fluid it conveys or of the soil that surrounds it is only subject to modest axial thermal stresses that are well within the strength capabilities of the pipe.

The magnitude of the soil restraint, which acts on plastic pipe with an externally smooth wall, may be estimated from the following equation:

$$f = \mu \cdot N$$

**Where:**

f = Axial frictional resistance (lbs./inch of pipe length)

μ = Approximate coefficient of friction between soil and pipe and between concrete and pipe. A value of 0.1 is generally accepted as a conservative representation for the case where smooth-surface plastic pipe makes full contact with the embedment material.

N = Normal soil pressure acting on 1" of width pipe (psi/inch)

$N = \pi \cdot D_o \cdot \text{Soil pressure}$ , where  $D_o$  is the pipe outside diameter (inches)

An example of taking advantage of soil restraint is installing the piping in a snaking pattern and utilizing continuous runs to capitalize on the piping's flexibility.

## Chapter 6:

# Installation methods

This section profiles potable-water installation methods that are typical for commercial buildings to which both fire and building codes apply (generally referred to as fire-resistant construction buildings). Each method includes a detailed illustration with notes for installing potable-water piping in fire-resistant construction buildings.

For specific fire-assembly details, refer to **Chapter 3**.

### Local code approvals

Before installing any piping, discuss the installation with local building and plumbing officials. While the Uponor plumbing systems described in this section meet the requirements of most building and plumbing codes found in the United States and Canada, some inspectors are not aware of these types of installations. **Chapters 1 and 3** in this design manual provide supporting information and listings for United States and Canadian code compliance.

### Storing and handling PEX

Although not comprehensive, the following highlights the most common guidelines when storing and handling Uponor AquaPEX.

- Keep Uponor AquaPEX piping in the original packaging until the time of installation.
- Install Uponor systems according to the installation instructions. Failure to follow the instructions and installation guidelines in this manual can result in the failure of Uponor systems.
- Do not use Uponor AquaPEX piping where temperatures and pressures exceed ratings.
- Do not use or store Uponor AquaPEX White piping where it will be exposed to direct sunlight for more than 30 days.
- Do not use or store Uponor AquaPEX Red and Blue piping where it will be exposed to direct sunlight for more than 90 days.
- Do not weld, glue or use adhesives or adhesive tape with Uponor AquaPEX piping.  
**Note:** You may temporarily affix adhesive tape to Uponor AquaPEX piping during installation. However, to protect the integrity of the system, the tape should not be permanent. Remove the tape and residual adhesive after completing the installation.
- Do not apply open flame to Uponor AquaPEX piping.
- Minimum clearance from Insulation Contact (I.C.) rated fixtures is 2". Minimum clearance from non-I.C. rated fixtures is 12". For distances closer than the above minimums, protect the pipe with an approved insulation.
- Do not install Uponor AquaPEX within 5 ft. of direct view from fluorescent and LED lighting without protecting the pipe with a UV-blocking material.
- Do not use Uponor AquaPEX piping to convey natural gas.
- Do not solder, braze, weld or fusion-weld within 18" of any Uponor AquaPEX piping in the same water line. Make any heat-related connections prior to making the ProPEX connection.
- Do not install Uponor AquaPEX piping between the tub/shower valve and tub spout.
- Do not use Uponor AquaPEX piping for an electrical ground.
- Do not spray on or allow organic chemicals, strong acids or strong bases to come into contact with Uponor AquaPEX piping.
- Do not use petroleum or solvent-based paints, greases or sealants on Uponor AquaPEX piping.
- Use only approved and appropriate firestop materials with Uponor AquaPEX piping.
- Do not allow rodents, insects or other pests to come into contact with Uponor AquaPEX piping.
- Do not subject Uponor AquaPEX piping to blunt impact.
- Do not install Uponor AquaPEX piping in soil environments contaminated with solvents, fuels, organic compounds, pesticides or other detrimental materials that may cause permeation, corrosion, degradation or structural failure of the piping. In areas where such conditions are suspected, perform a chemical analysis of the soil or groundwater to ascertain the acceptability of Uponor AquaPEX piping for the specific installation. Check local codes for additional requirements.
- Do not press standard ProPEX LF brass fittings (i.e., copper press). Only press Uponor ProPEX copper press adapters.
- Do not install Uponor AquaPEX pipe in steel-stud applications without the use of grommets to protect the pipe from abrasion.

**Note:** When transitioning from PEX to other piping materials, follow the appropriate installation instructions for that product.

## Uncoiling PEX

An Uponor uncoiler is recommended for convenient uncoiling when the piping is not in the Punch&Pull™ packaging.


## Bending PEX

The minimum bend radius of Uponor AquaPEX pipe is six times the outside diameter of the pipe. Use bend supports for 3/8", 1/2", 3/4" and 1" piping to facilitate 90-degree rigid bends. Use large-diameter PVC conduit to facilitate 90-degree bends in larger-diameter Uponor AquaPEX piping.

To alleviate stress on ProPEX connections and fittings, take care to not change direction immediately after a ProPEX connection. To determine whether or not the directional change is too soon, refer to the table and figures below. Uponor recommends a minimum of two times the O.D. of the pipe as the minimum distance before changing direction (see **Figure 6-1**).

| Pipe size (in) | Pipe O.D. (in) | Min. bend radius (in) | 2 x O.D. (in) |
|----------------|----------------|-----------------------|---------------|
| 1/2"           | 0.625          | 3 3/4                 | 1 1/4         |
| 3/4"           | 0.875          | 5 1/4                 | 1 3/4         |
| 1"             | 1.125          | 6 3/4                 | 2 1/4         |

**Table 6-1: Minimum bend radius**

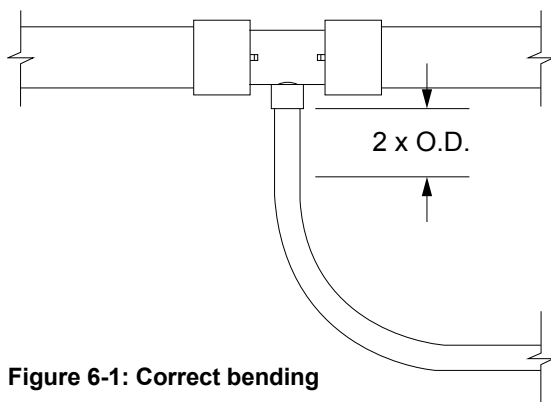

**Figure 6-1: Correct bending**

**Note:** When a proper bend cannot be achieved, use a ProPEX elbow.

## Reforming kinked piping

If the piping is kinked and hinders flow, easily make repairs following the steps below.

1. Make sure the system is not pressurized.
2. Straighten the kinked portion of the piping.
3. Heat the kinked area to approximately 265°F/129.4°C with an electric heat gun (approximately 450 watts of power). Apply the heat evenly until the piping returns to its original size and shape. **Do not use an open flame** (see **Figure 6-3**).
4. Allow the repaired piping to cool undisturbed to room temperature. When the piping returns to its opaque appearance, the repair is complete.



**Figure 6-3: Reforming kinked piping**

**Caution:** The piping surface temperature must not exceed 338°F/170°C. Do not apply direct flame to Uponor AquaPEX piping. Uponor AquaPEX piping repaired according to these recommendations will return to its original shape and strength. If the piping is sliced, punctured or otherwise damaged beyond the capacity of the crosslinked memory, install a ProPEX coupling. Uponor AquaPEX piping cannot be welded or repaired with adhesives.


## Thawing frozen piping

Uponor AquaPEX can withstand extreme freeze-thaw cycles better than other piping materials. In 2015, Uponor worked in partnership with standards developing organizations (SDOs) to establish a test method for performance under freeze/thaw conditions and subsequently developed a new standard for PEX piping applications. The test methodology included Uponor PEX pipe, ProPEX rings and ProPEX fitting assemblies and subjected them to repeated freeze/

thaw cycles. The assemblies were then evaluated for leaks under pressure after every cycle. Based on the samples provided and the testing performed, Uponor's 1/2" PEX pipe, ProPEX rings and ProPEX EP couplings passed the freeze/thaw cycling and subsequent burst tests without failure in accordance with the test method.

If freezing occurs, the installer should advise the end user to correct the lack of insulation or heat to eliminate the problem from reoccurring. Should Uponor AquaPEX piping experience an ice blockage, thaw the piping using one or more of the following methods.

- Pour hot water over the affected portion of piping.
- Wrap hot towels around the affected portion of piping.
- Place a small portable heating unit in the area to heat the space and thaw the ice blockage from the piping.
- Slowly heat the affected area with a hair dryer. Rub a hand over the area while heating to ensure the piping does not get too hot.

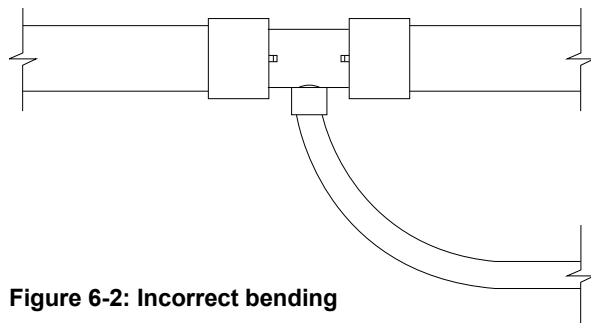

**Figure 6-2: Incorrect bending**

## Supporting Uponor PEX pipe

Suspended runs of Uponor PEX pipe can be supported by the same conventional means as metallic pipe, using copper tube size (CTS) hangers and supports. However, support spacing will vary depending on local code requirements.

**Note:** Uponor recommends using hangers and supports designed for use with plastic piping.

| Nominal pipe size | Spacing for bare PEX (Dimension A) |                          |   | Spacing with PEX-a Pipe Support (Dimension B) |                          |   |
|-------------------|------------------------------------|--------------------------|---|---|--------------------------|---|
|                   | International codes (IPC, IMC)     | Uniform codes (UPC, UMC) | National Plumbing Code of Canada (NPCC) | International codes (IPC, IMC)                | Uniform codes (UPC, UMC) | National Plumbing Code of Canada (NPCC) |
| 1/2"              | 32"                                | 32"                      | 32"                                     | 6'-0"   | 6'-0"                    | 6'-0"                                   |
| 3/4"              | 32"                                | 32"                      | 32"                                     | 6'-0"   | 6'-0"                    | 6'-0"                                   |
| 1"                | 32"                                | 32"                      | 32"                                     | 8'-0"   | 8'-0"                    | 8'-0"                                   |
| 1 1/4"            | 32"                                | 48"                      | 32"                                     | 8'-0"   | 8'-0"                    | 8'-0"                                   |
| 1 1/2"            | 32"                                | 48"                      | 32"                                     | 8'-0"   | 8'-0"                    | 8'-0"                                   |
| 2"                | 32"                                | 48"                      | 32"                                     | 8'-0"   | 8'-0"                    | 8'-0"                                   |
| 2 1/2"            | 32"                                | 48"                      | 32"                                     | 8'-0"   | 8'-0"                    | 8'-0"                                   |
| 3"                | 32"                                | 48"                      | 32"                                     | 8'-0"   | 8'-0"                    | 8'-0"                                   |

Table 6-2: Horizontal support spacing requirements for Uponor PEX pipe

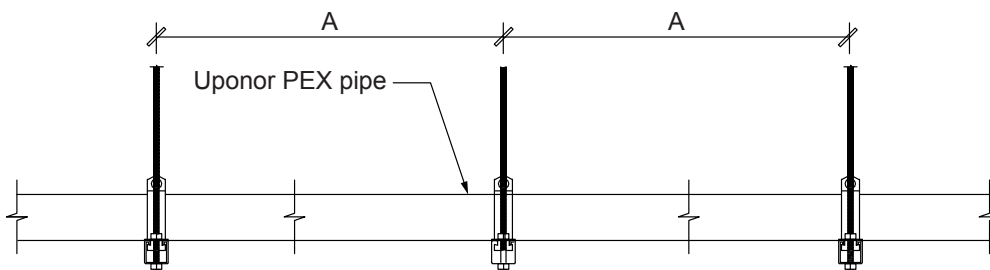


Figure 6-4: Maximum allowable support spacing for bare-PEX pipe

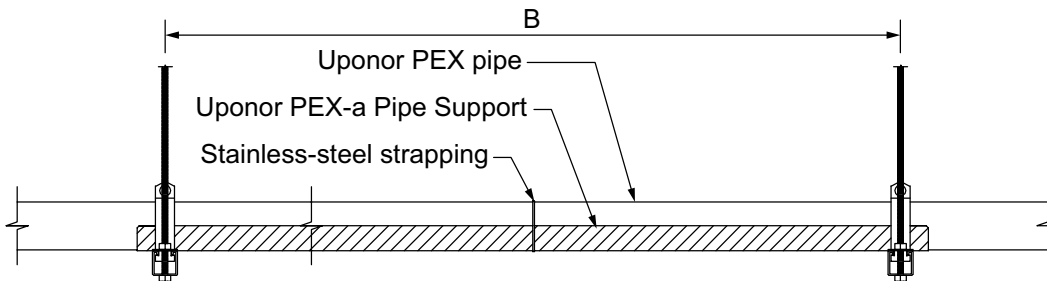


Figure 6-5: Maximum allowable support spacing for PEX pipe with PEX-a Pipe Support


## Supporting fittings and valves

Sections of pipe with in-line fittings, such as tees, couplings and valves, must be supported per local code requirements.


**Note:** PEX-a Pipe Support cannot be used to increase hanger spacing of these pipe sections.

| Nominal pipe size | Spacing for bare PEX (Dimension A) |                          |   |
|-------------------|------------------------------------|--------------------------|---|
|                   | International codes (IPC, IMC)     | Uniform codes (UPC, UMC) | National Plumbing Code of Canada (NPCC) |
| 1/2"              | 32"                                | 32"                      | 32"                                     |
| 3/4"              | 32"                                | 32"                      | 32"                                     |
| 1"                | 32"                                | 32"                      | 32"                                     |
| 1 1/4"            | 32"                                | 48"                      | 32"                                     |
| 1 1/2"            | 32"                                | 48"                      | 32"                                     |
| 2"                | 32"                                | 48"                      | 32"                                     |
| 2 1/2"            | 32"                                | 48"                      | 32"                                     |
| 3"                | 32"                                | 48"                      | 32"                                     |

**Table 6-3: Support requirements for fittings**

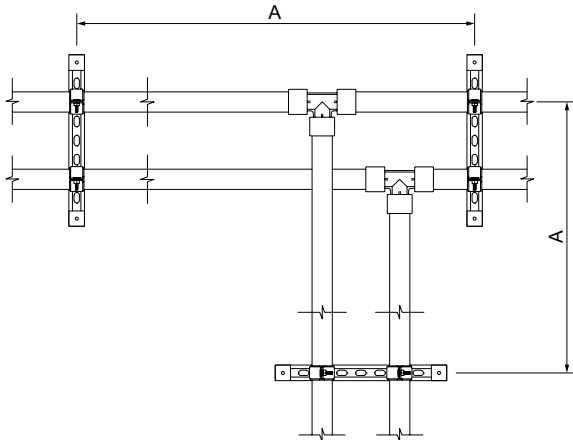


**Figure 6-6: Support requirements for fittings**

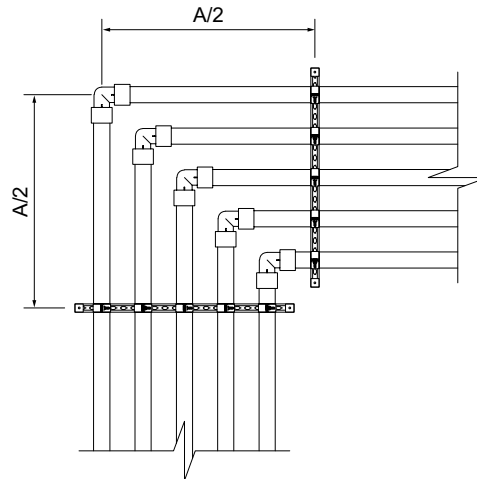


**Figure 6-7: Support requirements for fittings at corners**

If distance "A/2" is not attainable in **Figure 6-7**, an additional support is required as shown in **Figure 6-8**.

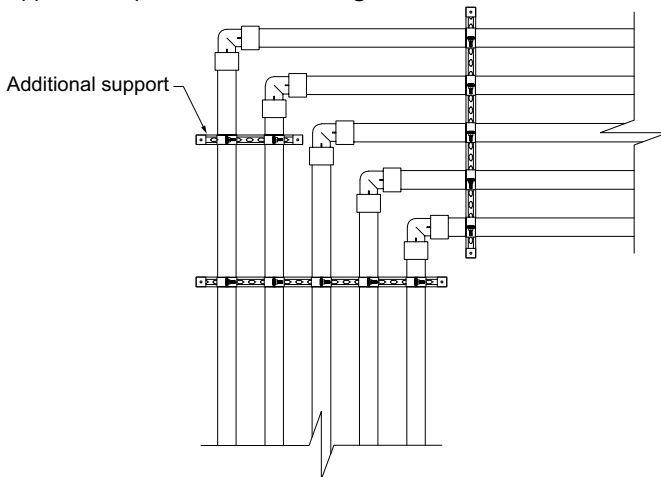

**Figure 6-8: Additional support requirements for fittings at corners**

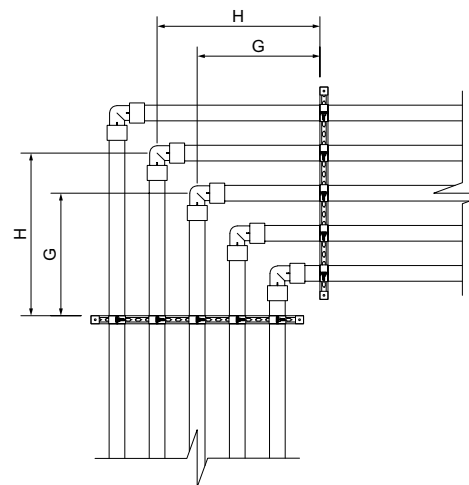

**Figure 6-9: Corner support example**

Distance G = 16"

Total distance for segment G = 32" (16 + 16)

Distance H = >16"

Total distance for segment H = >32"




| Nominal pipe size | Spacing for bare PEX (Dimension A) |                          |   | Dimension B      |
|-------------------|------------------------------------|--------------------------|---|------------------|
|                   | International codes (IPC, IMC)     | Uniform codes (UPC, UMC) | National Plumbing Code of Canada (NPCC) | All codes        |
| 1/2"              | 32"                                | 32"                      | 32"                                     | - <sup>1</sup>   |
| 3/4"              | 32"                                | 32"                      | 32"                                     | - <sup>1</sup>   |
| 1"                | 32"                                | 32"                      | 32"                                     | - <sup>1</sup>   |
| 1 1/4"            | 32"                                | 48"                      | 32"                                     | 18" <sup>2</sup> |
| 1 1/2"            | 32"                                | 48"                      | 32"                                     | 18" <sup>2</sup> |
| 2"                | 32"                                | 48"                      | 32"                                     | 18" <sup>2</sup> |
| 2 1/2"            | 32"                                | 48"                      | 32"                                     | 7" <sup>3</sup>  |
| 3"                | 32"                                | 48"                      | 32"                                     | 7" <sup>3</sup>  |

**Table 6-4: Support requirements for valves**


<sup>1</sup>Place 1/2" to 1" ball valves anywhere within Dimension A.

<sup>2</sup>Based on a ProPEX ball valve or similar

<sup>3</sup>Based on ductile-iron butterfly valves or similar

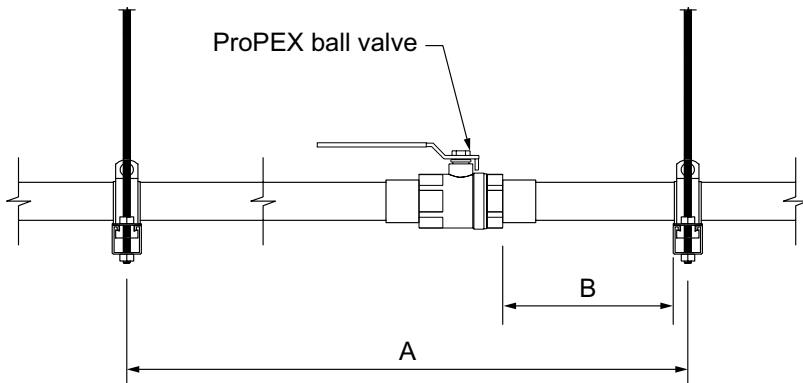


**Figure 6-10: Supporting 1 1/4" to 2" ball valves**

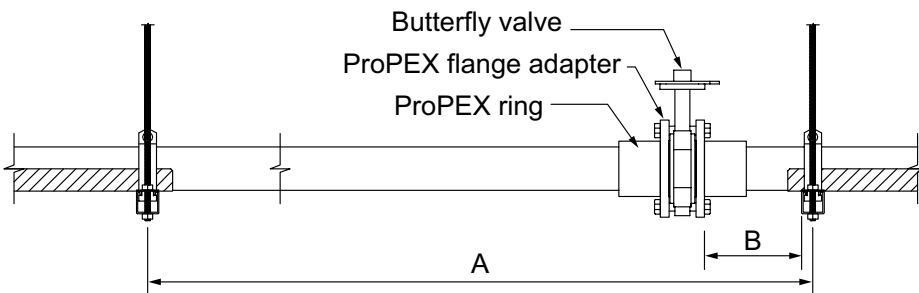

**Figure 6-11: Supporting 2 1/2" to 3" butterfly valves**

When distance "B" in the above example is not attainable, additional support of the valve is required as shown in **Figure 6-12**.

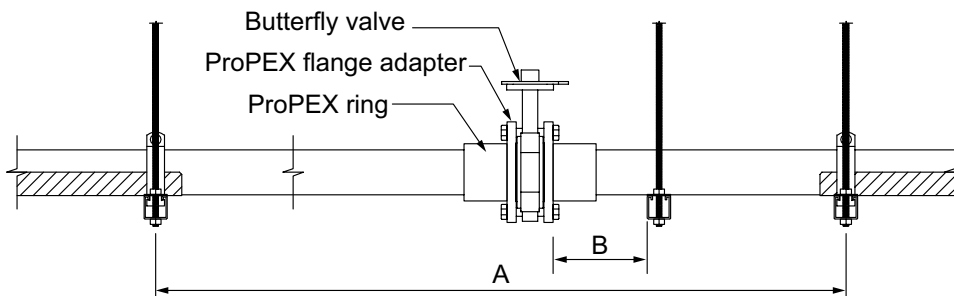

**Figure 6-12: Additional support for butterfly valves**

## Uponor PEX-a Pipe Support

PEX-a Pipe Support is a 23-gauge galvanized-steel channel for PEX piping with a CTS (copper tube size) controlled outside diameter. It features a profile that is over half-round, making it self-gripping. It provides continuous, uninterrupted support of PEX piping, allowing increased hanger spacing over bare PEX.

### Product offering

PEX-a Pipe Support is available in 9-foot (3m) lengths in the following sizes:

- ½"
- ¾"
- 1"
- 1¼"
- 1½"
- 2"
- 2½"
- 3"
- 3½"

### Nylon-coated stainless-steel straps

Each bundle of PEX-a Pipe Support includes a package of stainless-steel straps. The straps carry a 300-lb. tensile rating and are tested for the appropriate applications.

## Insulating PEX-a Pipe Support

The low profile of PEX-a Pipe Support allows insulation with typical CTS pipe insulation.

### Important tips for installing PEX-a Pipe Support

- Always follow local code for general piping support requirements.
- All pieces of PEX-a Pipe Support must have a minimum of two supports/hangers.
- Use the included 300-lb., tensile-rated, stainless-steel straps to secure the support channel to the pipe. If the included straps are misplaced, use a stainless-steel strap of equal or greater strength.
- Due to expansion characteristics of Uponor PEX piping, it is important to use a minimum 300-lb., stainless-steel cable tie or equivalent for securing the PEX-a Pipe Support to the piping.

## Tips for cutting PEX-a Pipe Support

- Always cut the PEX-a Pipe Support starting from the round side.
- When using a reciprocating or band saw to cut the PEX-a Pipe Support, either place the support flat-side down to make a clean cut or place a scrap piece of pipe into the support before cutting.
- When using a hand tool such as tin snips to cut the PEX-a Pipe Support, place the support flat-side down and mark a line on the support to follow.
- When cutting a support, take care not to bend it.
- After cutting PEX-a Pipe Support, taper and smooth any sharp edges.

## Hanger and support layouts with PEX-a Pipe Support

In general, the use of Uponor PEX-a Pipe Support will allow for increased hanger and support spacing over bare PEX pipe. However, because PEX-a Pipe Support is a secondary-support material that is added to the outside of the pipe, the introduction of fittings or joints will interrupt the use of the pipe support, resulting in staggered hanger spacing scenarios (see **page 69** for examples).

### Designing hanger and support layouts

Uponor recommends detailed hanger and support layouts utilizing the methods outlined on **pages 69** and **70**.



Figure 6-13: Uponor PEX-a Pipe Support with nylon-coated, stainless-steel strapping

## General requirements for PEX-a Pipe Support

- PEX-a Pipe Support can be used to achieve greater spans than those shown in Dimension A in the table below.
- Segments of PEX-a Pipe Support that are greater than the distances in Dimension A in the table below require a minimum of two supports.


| Nominal pipe size | Spacing for bare PEX (Dimension A) |                          |   | Spacing with PEX-a Pipe Support (Dimension B) |                          |   |
|-------------------|------------------------------------|--------------------------|---|---|--------------------------|---|
|                   | International codes (IPC, IMC)     | Uniform codes (UPC, UMC) | National Plumbing Code of Canada (NPCC) | International codes (IPC, IMC)                | Uniform codes (UPC, UMC) | National Plumbing Code of Canada (NPCC) |
| 1/2"              | 32"                                | 32"                      | 32"                                     | 6'-0"   | 6'-0"                    | 6'-0"                                   |
| 3/4"              | 32"                                | 32"                      | 32"                                     | 6'-0"   | 6'-0"                    | 6'-0"                                   |
| 1"                | 32"                                | 32"                      | 32"                                     | 8'-0"   | 8'-0"                    | 8'-0"                                   |
| 1 1/4"            | 32"                                | 48"                      | 32"                                     | 8'-0"   | 8'-0"                    | 8'-0"                                   |
| 1 1/2"            | 32"                                | 48"                      | 32"                                     | 8'-0"   | 8'-0"                    | 8'-0"                                   |
| 2"                | 32"                                | 48"                      | 32"                                     | 8'-0"   | 8'-0"                    | 8'-0"                                   |
| 2 1/2"            | 32"                                | 48"                      | 32"                                     | 8'-0"   | 8'-0"                    | 8'-0"                                   |
| 3"                | 32"                                | 48"                      | 32"                                     | 8'-0"   | 8'-0"                    | 8'-0"                                   |

**Table 6-5: Maximum allowable support spacing for PEX pipe**

### Scenario 1: No fittings

The following scenario involves Uponor PEX pipe from a coil with PEX-a Pipe Support and no fittings.

- Maximum hanger spacing is 6' to 8' for all pipe segments (per Dimension B in above table).

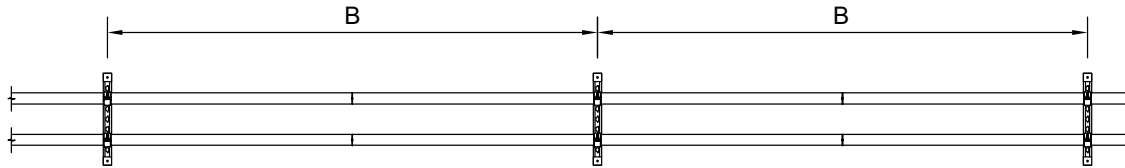

**Figure 6-14: PEX-a Pipe Support without fittings**

### Scenario 2: Segments with fittings


The following scenario features Uponor PEX pipe with PEX-a Pipe Support and fittings.

- Maximum hanger spacing is 6' to 8' for full-length pipe segments with PEX-a Pipe Support (per Dimension B in above table).
- Hanger spacing changes to Dimension A for fitting segment (spacing for area with no PEX-a Pipe Support).

**Note:** Uponor recommends detailed hanger and support layouts using the above methods for PEX pipe.

**Note:** Simply placing hangers at a consistent on-center distance (e.g., 6'-0", 6'-0"... ) will not provide the full-benefits of PEX-a Pipe Support when using fittings.

- Using the recommended installation methods will allow for the maximum benefit of PEX-a Pipe Support because the designer is able to stagger hanger locations based on the PEX-a Pipe Support lengths.

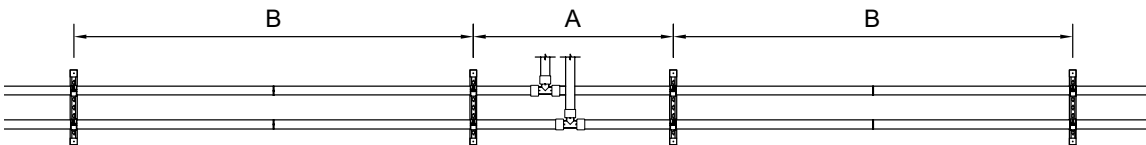

**Figure 6-15: PEX-a Pipe Support with fittings**

| Nominal pipe size | Max. support spacing (A) | Max. cantilever (B) | Min. overlap (C) | Min. distance to fitting (D) | Min. overhang (E) |
|-------------------|--------------------------|---------------------|------------------|------------------------------|-------------------|
| 1/2"              | 6'-0"                    | 18"                 | 6"               | 1 1/4"                       | 1"                |
| 3/4"              |                          |                     |                  | 1 3/4"                       |                   |
| 1"                | 2 1/4"                   |                     |                  |                              |                   |
| 1 1/4"            | 2 3/4"                   |                     |                  |                              |                   |
| 1 1/2"            | 3"                       |                     |                  |                              |                   |
| 2"                | 4"                       |                     |                  |                              |                   |
| 2 1/2"            | 5"                       |                     |                  |                              |                   |
| 3"                | 6"                       |                     |                  |                              |                   |

Table 6-6: Uponor PEX-a Pipe Support minimum and maximum spacing requirements

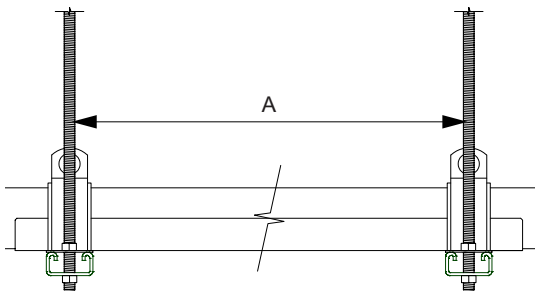


Figure 6-16: Maximum support spacing

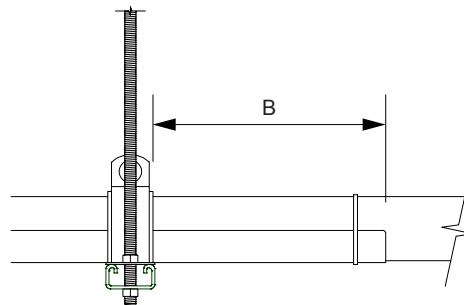


Figure 6-17: Maximum cantilever

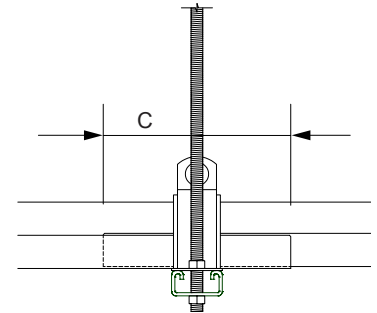


Figure 6-18: Minimum overlap

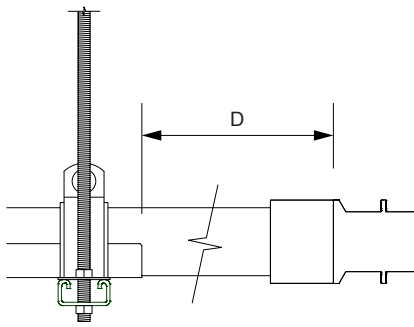


Figure 6-19: Minimum distance to fitting




Figure 6-20: Minimum overhang


## Strapping requirements for PEX-a Pipe Support

Uponor requires PEX-a Pipe Support be strapped with a minimum 300-lb., tensile-rated, stainless-steel strap that is suitable for the application (i.e., UV, high temperature).


**Note:** Uponor includes required stainless-steel straps with the PEX-a Pipe Support. If the included straps are misplaced, use a stainless-steel strap of equal or greater strength.

| Application | Maximum distance  |
|-------------|---|
| Clamps      | Greater than 48" = 1 strap mid-span   |
| Hangers     | <ul style="list-style-type: none"> <li>• Less than 48" = 2 straps equally spaced</li> <li>• Greater than 48" = 3 straps (1 mid-span and 1 on each end placed 2" from end of support)</li> </ul> |


**Table 6-7: Strapping requirements for clamps and hangers**

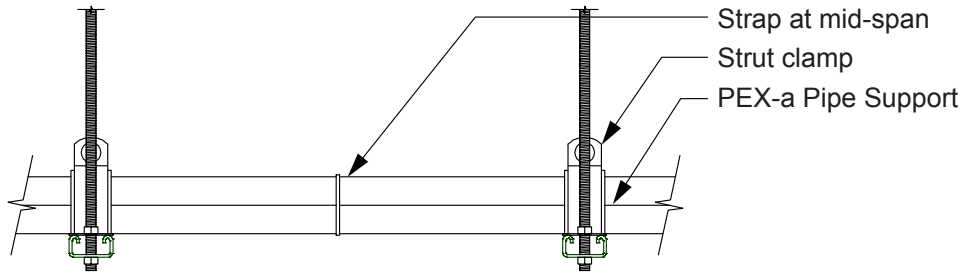

**Figure 6-21: Strapping for systems using strut-type clamps or equivalent**

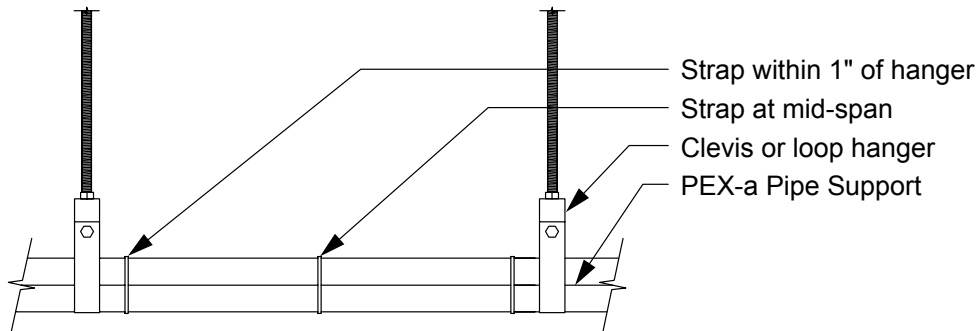

**Figure 6-22: Strapping for systems using clevis or loop-type hangers or equivalent**

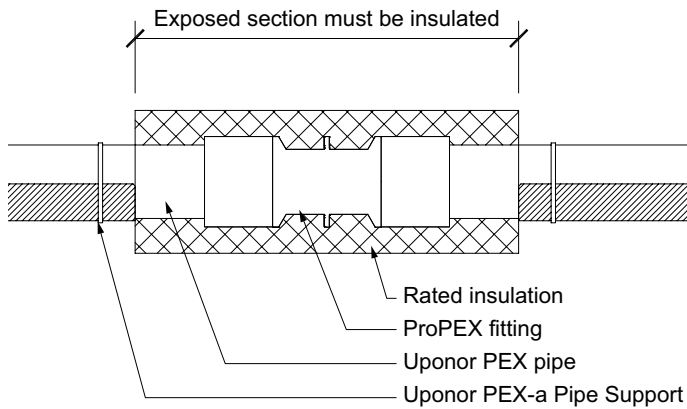

**Figure 6-23: PEX-a Pipe Support installations in ASTM E84 applications**

### ASTM E84 requirements for PEX-a Pipe Support

Uponor PEX-a Pipe Support has been tested and approved for use in ASTM E84 applications. To meet the requirements, PEX-a Pipe Support must be installed per the following requirements:

- Pipe or fittings without PEX-a Pipe Support shall be covered with a minimum ½" thick insulation.
- There is no minimum segment length of PEX-a Pipe Support.

When installed per the above requirements, there are no spacing limitations between parallel piping runs.

**Note:** The above requirements also apply to PEX-a Pipe Support installed in a vertical position for ASTM E84 applications.

**Note:** Exposed sections of ½" and ¾" Uponor PEX pipe can be installed un-insulated if the pipe runs are separated by a minimum of 18".

### Expansion and contraction control with PEX-a Pipe Support

When properly installed, Uponor PEX-a Pipe Support can reduce linear expansion and contraction by up to 93 percent when compared to bare-PEX pipe. For more information, refer to **Table 5-15 on Page 59**.

Refer to the following requirements.

- 300-lb., tensile-rated, stainless-steel straps (included)
- Fixed anchor points installed every 65 ft. for domestic hot-water applications ( $\Delta T > 40^\circ\text{F}$ )
- Fixed anchor points installed every 150 ft. for domestic cold-water applications ( $\Delta T > 40^\circ\text{F}$ )



**Figure 6-24: Uponor PEX-a Pipe Support with nylon-coated, stainless-steel strapping**

## Supporting Uponor multiport tees

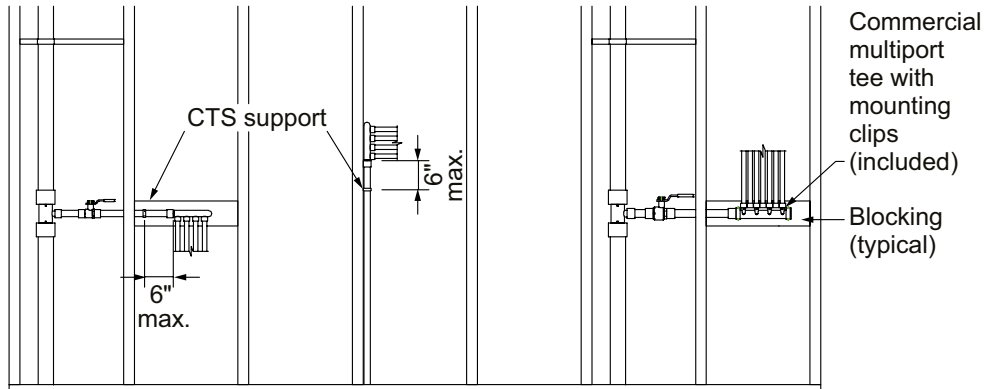


Figure 6-25: In-wall supports for multiport tees

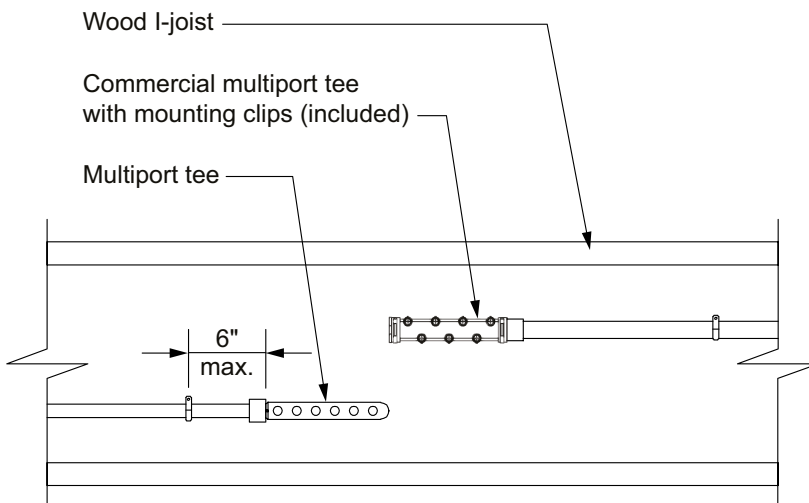


Figure 6-26: Supporting multiport tees on wood I-joists



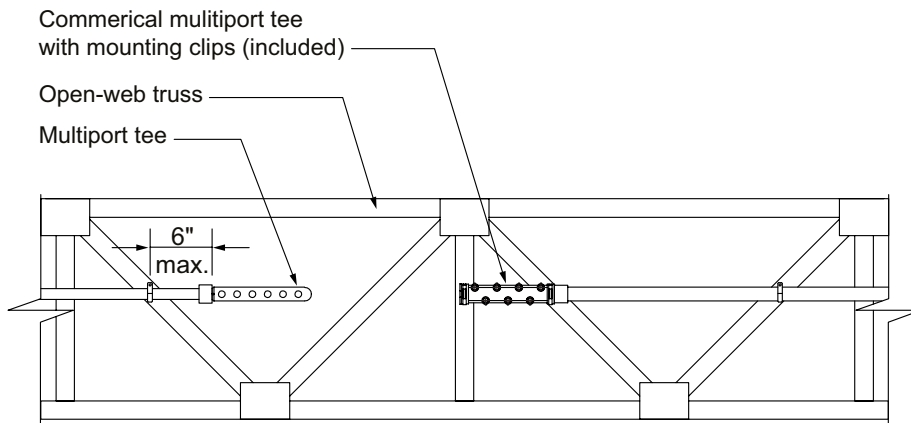


Figure 6-27: Supporting multiport tees on open-web wood trusses

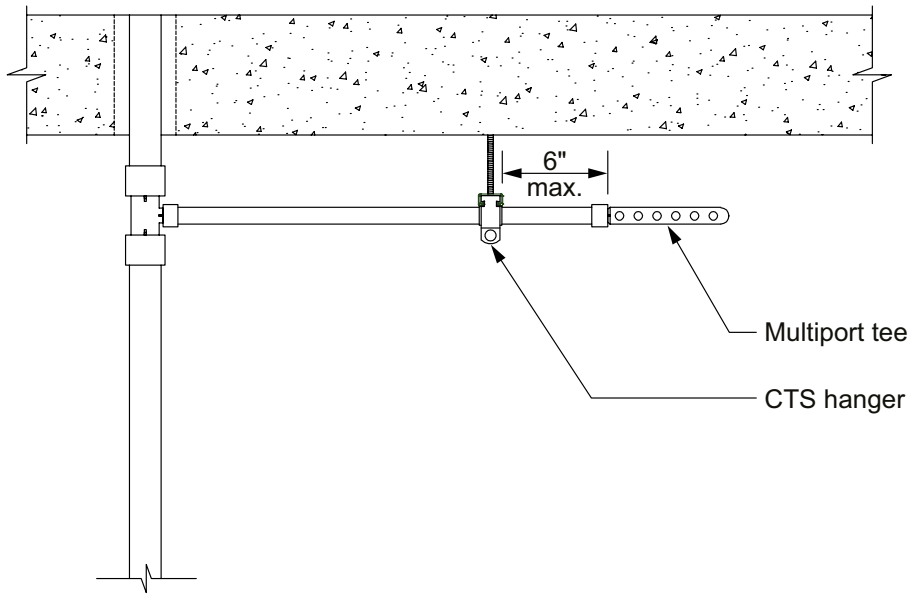

**Figure 6-28: Supporting multiport tees in suspended applications**

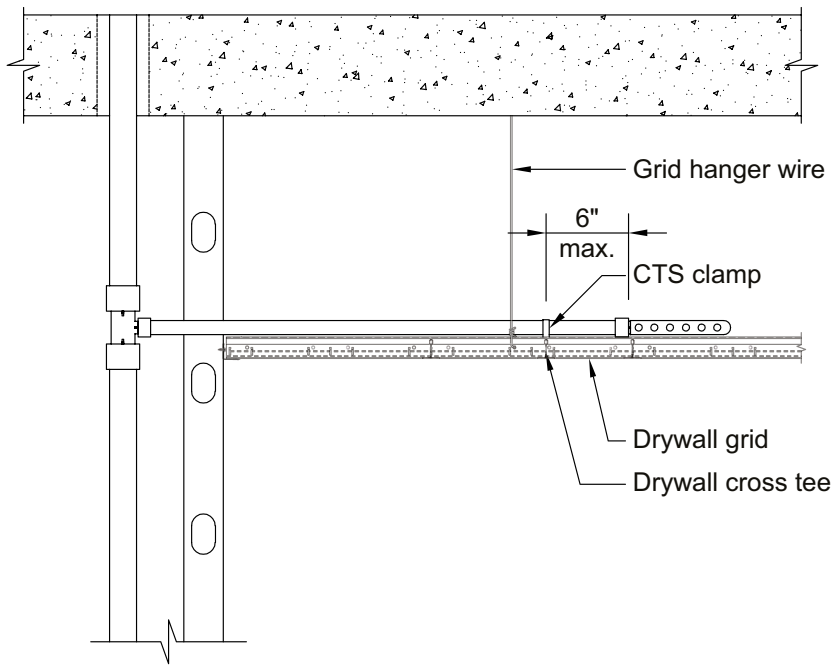

**Figure 6-29: Supporting multiport tees on drywall grid**



## Vertical support requirements

Vertical runs of pipe fall into two categories: in wall and risers.

In-wall piping is typically smaller in diameter (<1"), and does not pass through multiple stories like a riser. It is most often the dedicated supply piping to the fixture.

Riser piping is typically larger in diameter (>1") and passes through multiple stories, often requiring fire-penetration sealants.

**Note:** The two categories above are not mutually exclusive. Use best judgment when determining which supports are necessary.

|          |         | Nominal pipe size                | All codes   |
|----------|---------|----------------------------------|---|
| Vertical | In wall | All pipe sizes                   | 5 ft. (1.5 m)   |
|          | Risers  | Domestic cold water              | Clamp at base of each floor; clamp at top of every fourth floor; provide mid-story guide    |
|          |         | Domestic hot water               | Clamp at base of each floor; clamp at the top of every-other floor; provide mid-story guide |
|          |         | Heating hot water, chilled water | Clamp at the base of each floor; clamp at the top of every floor; provide mid-story guide   |

Table 6-8: Vertical support requirements for PEX pipe

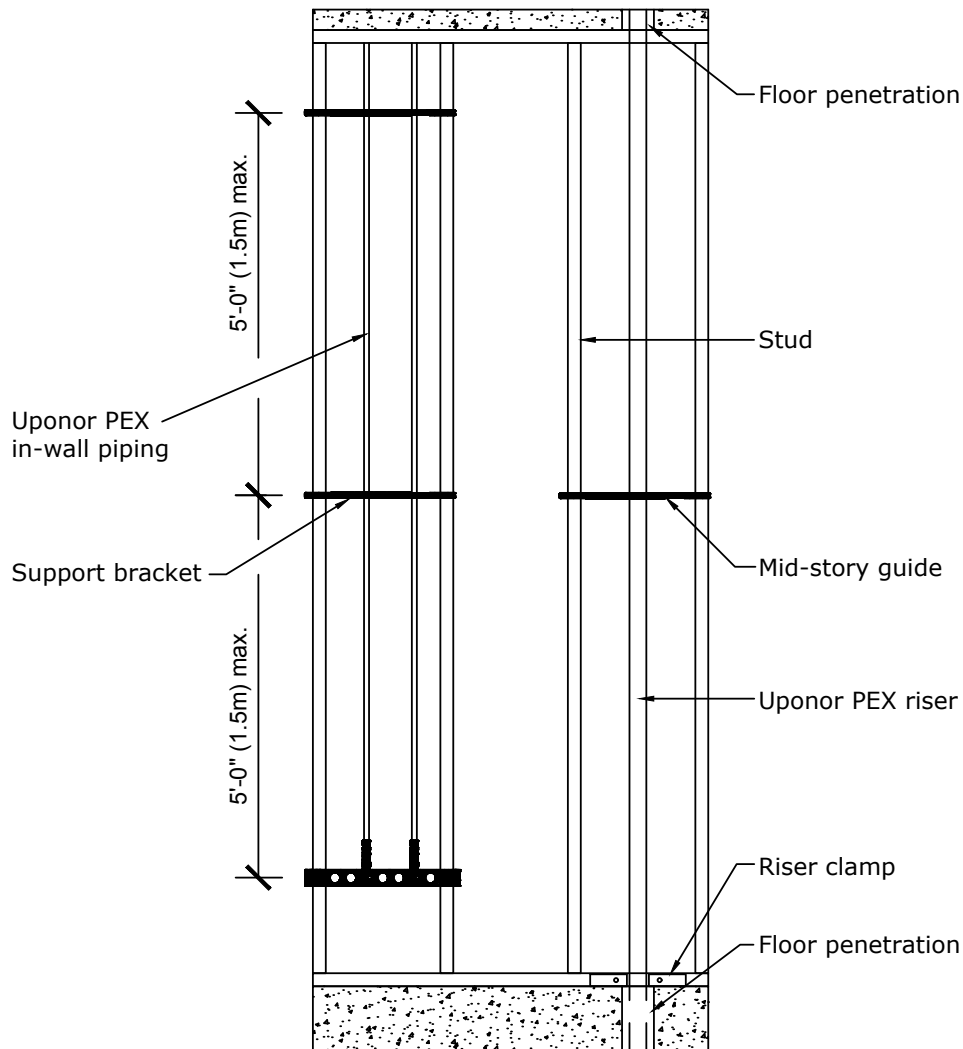


Figure 6-30: In-wall versus riser piping

## Support methods

The following pages provide examples of PEX installations in various commercial building applications. While not every method is included, the following examples address the majority of installations in North America. Other installation methods are available; contact Uponor for further guidance in these situations.

### Wood-frame construction

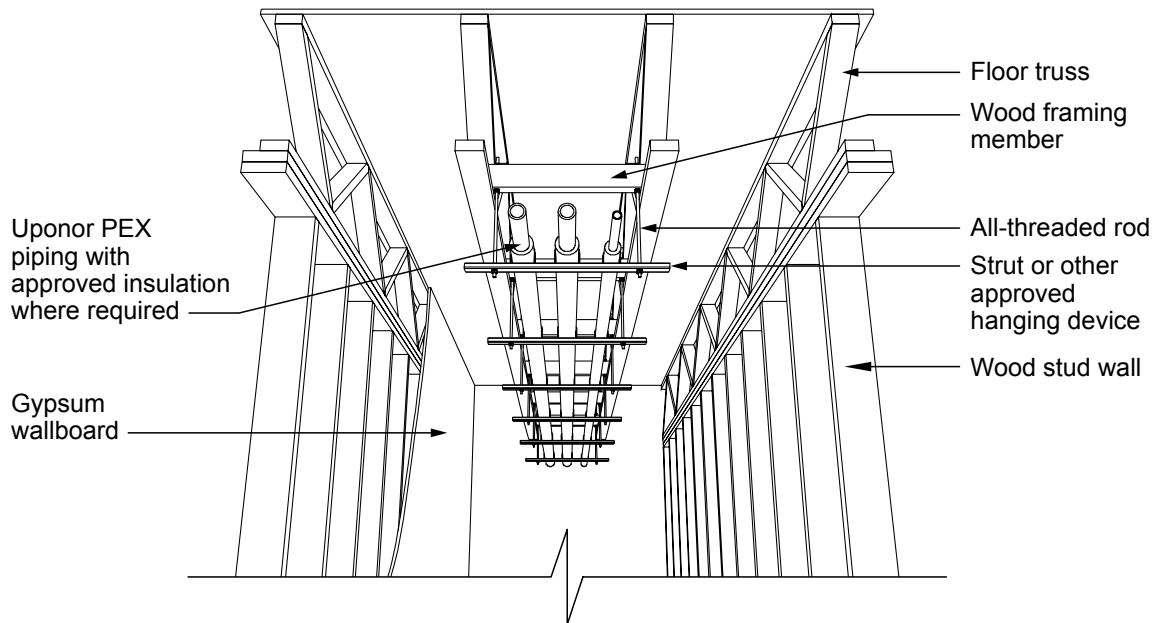


Figure 6-31: Hallway/corridor detail



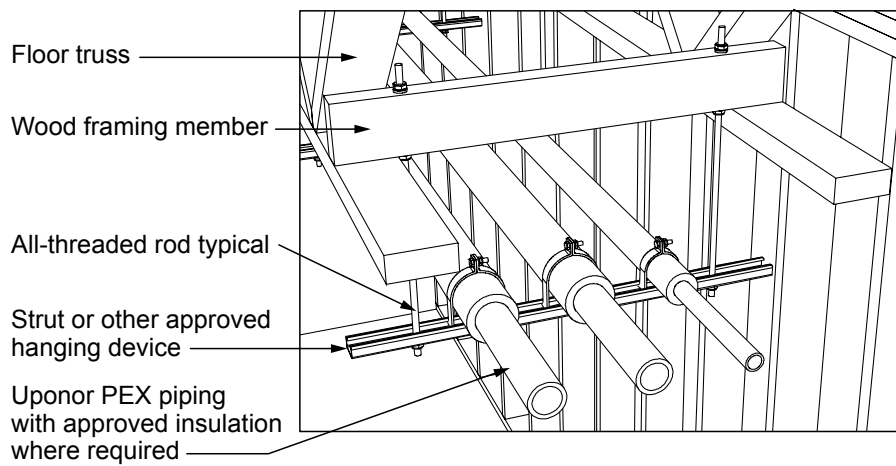


Figure 6-32: Hanger detail


### Steel-frame construction

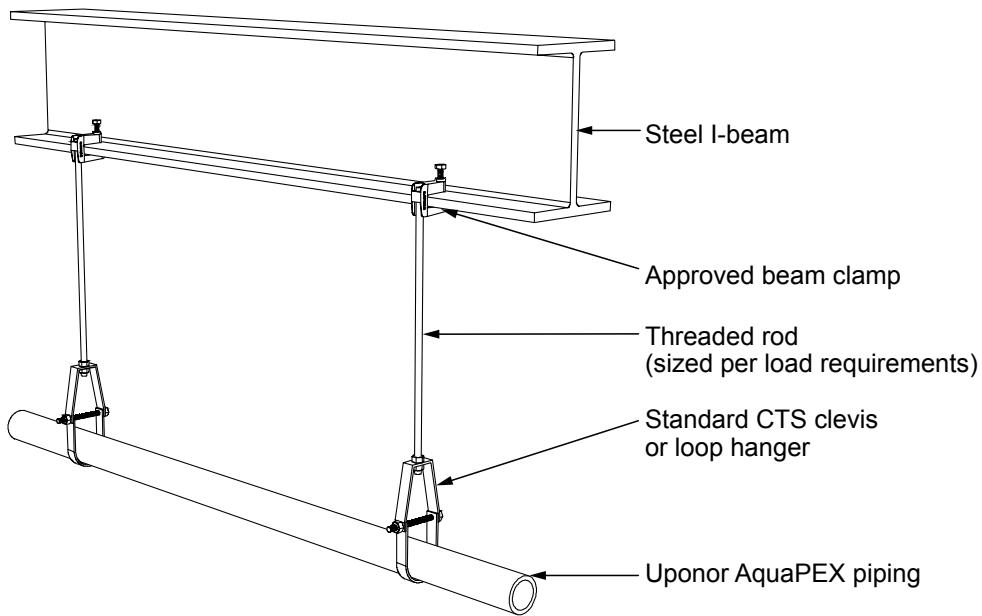


**Figure 6-33: Steel beam with standard CTS clevis hangers**

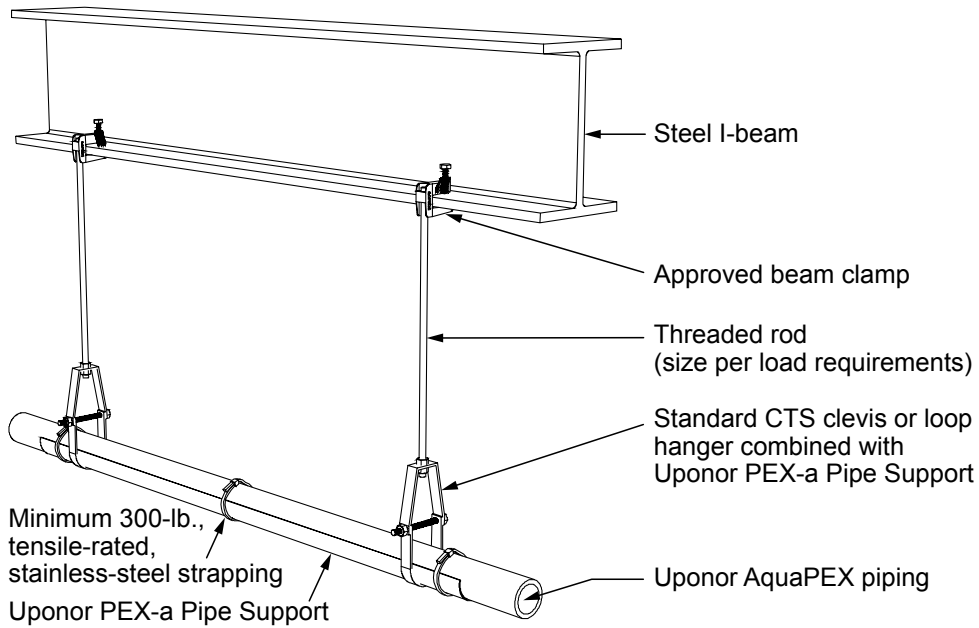

**Figure 6-34: Steel beam with standard CTS clevis hangers and Uponor PEX-a Pipe Support**

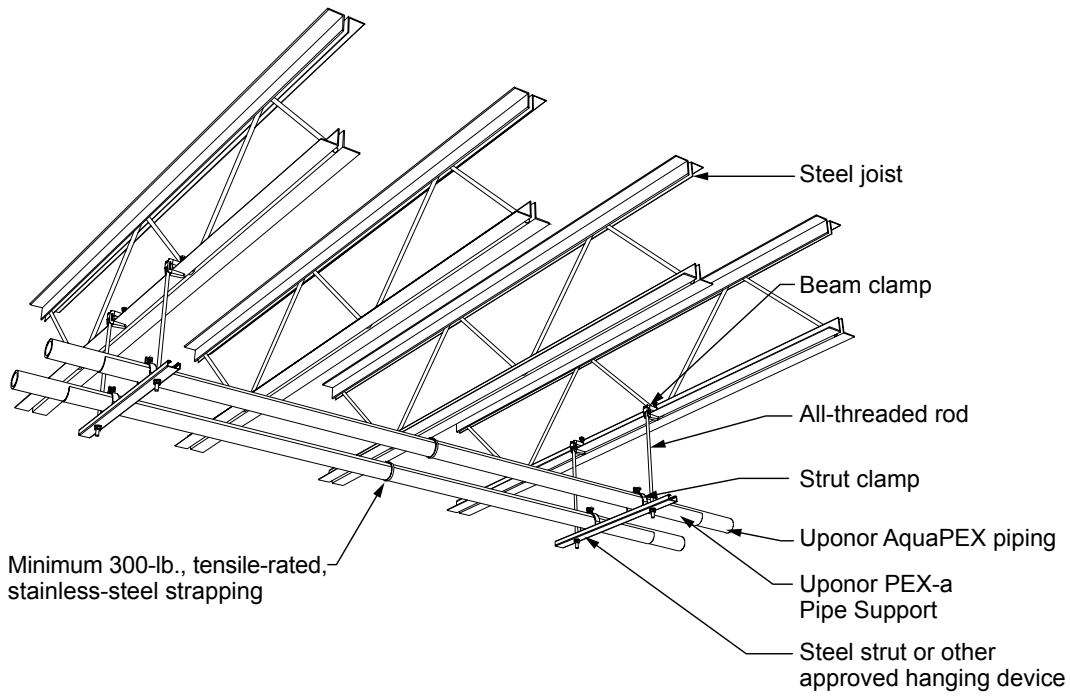

**Figure 6-35: Uponor PEX suspended from steel joists with strut and Uponor PEX-a Pipe Support**

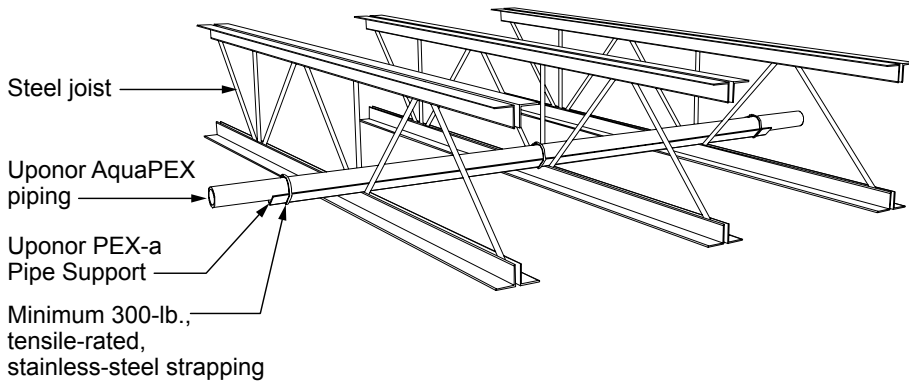

**Figure 6-36: Uponor PEX supported by steel joists and PEX-a Pipe Support**


## Expansion-compensating devices

As a generally accepted practice, an expansion-controlling device with fixed anchor points or a continuous run of PEX-a Pipe Support with fixed anchor points is installed every 65 ft. of straight-length piping in a domestic hot-water system. Always install the device at the mid-point of two fixed points (see **Figure 6-37**).

### Fixed anchor points

To account for expansion, use fixed anchor points to restrict piping movement. Ensure fixed anchor points are constructed with materials that will provide rigidity to the support system and use a pipe clamp that will restrain the specific piping material.

When installing strut-type applications, Uponor recommends using rubber-lined strut clamps to aid in the restriction of movement.

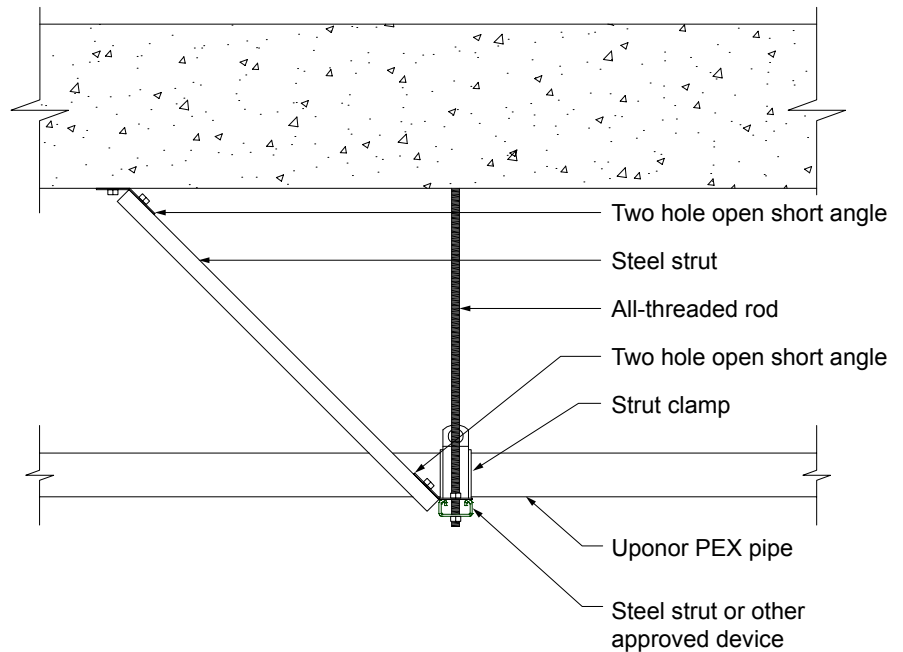


**Figure 6-37: Fixed anchor point**

### Expansion arm

The flexible arm should be long enough to prevent damage; place support clamps far enough from the wall to allow for longitudinal thermal expansion.

For a list of calculated flexible arm lengths, refer to **Appendix E**.

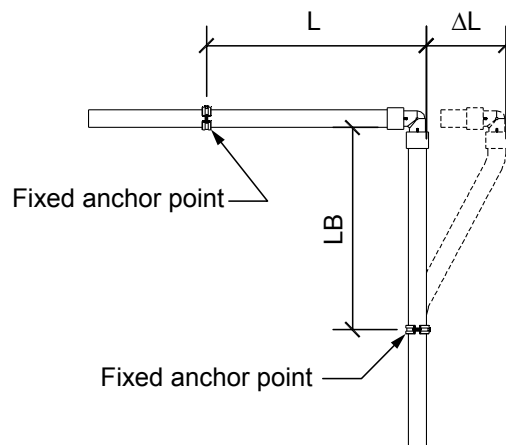


**Figure 6-38: Expansion arm**

### Expansion loop

The same applies for an expansion loop. However, the arm length (LB) must be divided into three sections.

For a list of calculated expansion loop legs, refer to **Appendix E**.

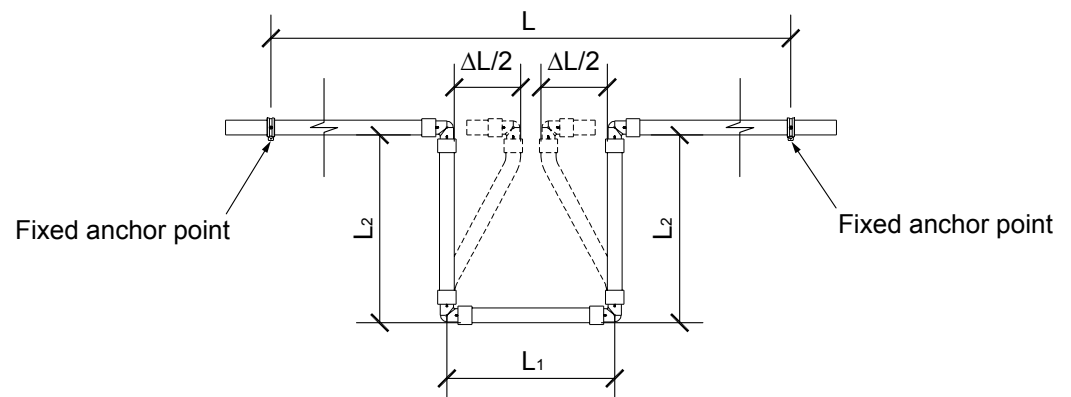

**Figure 6-39: Expansion loop**

### Expansion and contraction: cold-water risers

In cold-water applications, use CTS riser clamps to support the piping at the base of each floor. In conjunction with the riser clamps at the base of each story, use a riser clamp at the top of every fourth story, limiting expansion and contraction to 40 feet. A mid-story guide is also required on every story to guide the piping. Uponor recommends the use of iron pipe size (IPS) clamps for mid-story guides as to not restrain the piping.

### Expansion and contraction: hot-water risers

For hot-water applications, use CTS riser clamps at the base of each story. In conjunction with the riser clamps at the base of each story, use a riser clamp at the top of every-other story, limiting the expansion and contraction of the piping to 20 ft. This translates to a theoretical expansion of about 1½" in 20 ft. of piping at a 70°F/38.9°C temperature rise (installed at 70°F/21.1°C and a service temperature of 140°F/60°C). In this application, the piping will snake slightly in areas where it is not constrained. A mid-story guide is also required on every story to guide the piping.

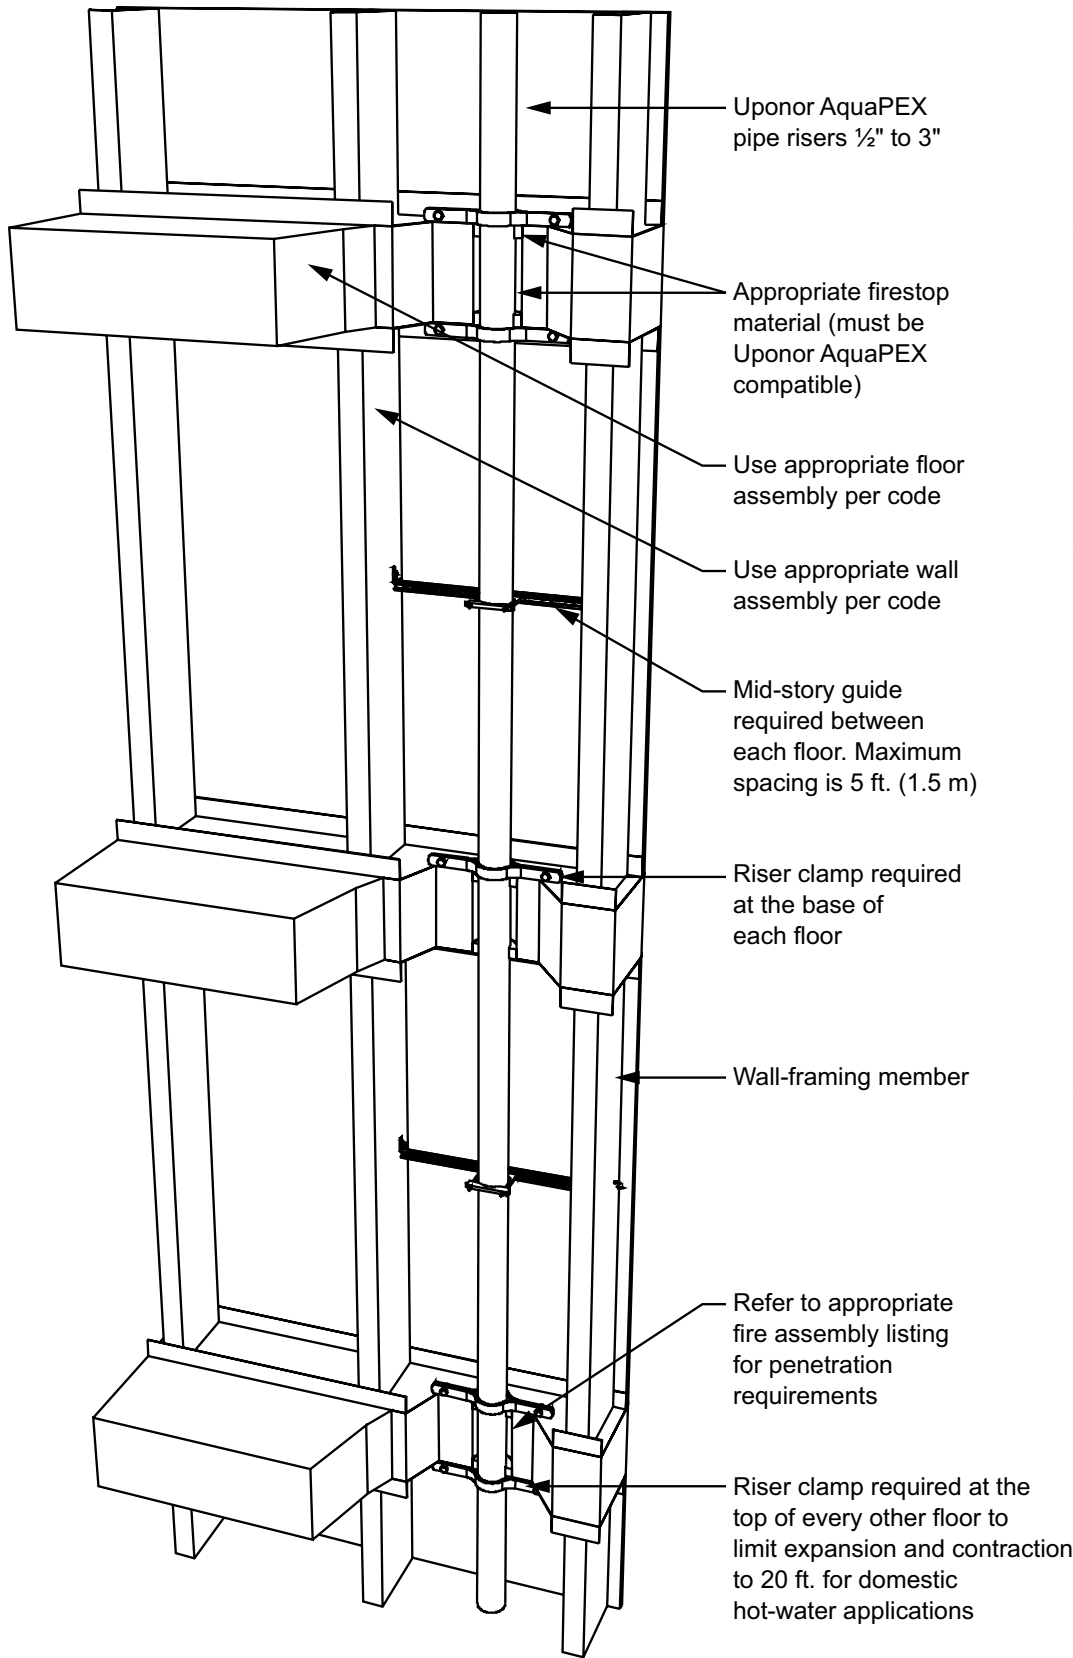


Figure 6-40: Hot-water risers

## Public-use fixtures

Water hammer is probably the most significant concern when piping for public-use fixtures.

In typical installations with metallic piping where back-to-back restrooms are separated by a mechanical chase, the supply header is usually kept at roughly the same height as the fixture supply. This creates sharp, abrupt paths for the water, resulting in pressure surges (water hammer) when a fast-actuating valve closes. To compensate, most local codes require water hammer arrestors.

The flexibility of Uponor AquaPEX piping combined with its ability to withstand high surge pressures makes it the perfect product for supplying public-use fixtures. PEX has an approximate modulus of elasticity of 91,350 psi, compared to

copper's 16,000,000 psi. Refer to **Chapter 5** for more information about expansion and contraction.

Because Uponor requires a minimum distance between ProPEX fittings (see **Table 2-1**), take care when creating a fixture header. In typical installations using Uponor AquaPEX, the PEX header is elevated to allow for adequate spacing between ProPEX tees and to also offer ample room for AquaPEX pipe drops to the fixture (see **Figure 6-42**).

## Pipe labels

If pipe labels are required to be affixed to Uponor AquaPEX pipe, Uponor approves the use of permanent, flexible, vinyl stickers with pressure-sensitive acrylic. Consult local code for proper placement and requirements regarding pipe labeling.

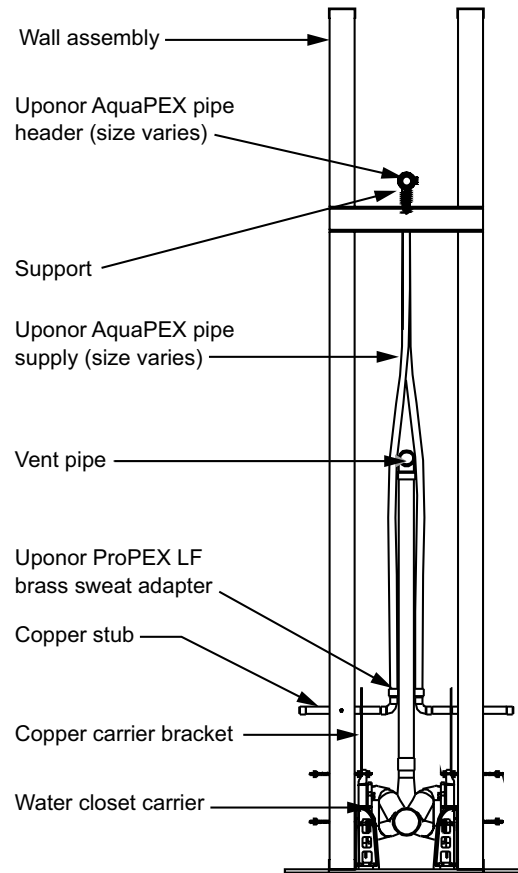


Figure 6-41: Fixture bank section view

## Commercial flush bank detail

Water hammer arrestor where required by code (exact locations vary by manufacturer)

Bend support (1/2" to 3/4" typical)

Uponor AquaPEX pipe supply (size varies)  
Isolation ball valve (typical)

Stud wall assembly

Uponor AquaPEX pipe header (size varies)

Uponor ProPEX EP tee  
Support

Vent pipe

Waste pipe

Urinal carrier behind

Copper carrier bracket

Water closet carrier

Copper stub

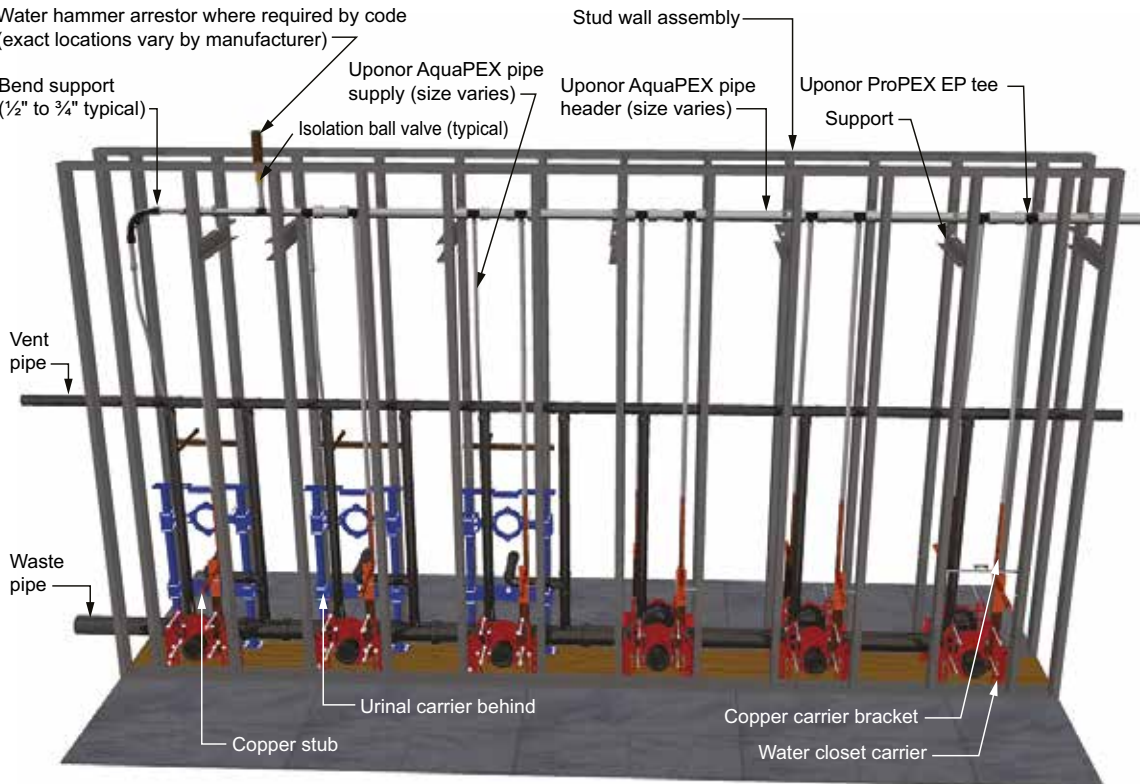


Figure 6-42: Fixture bank elevation view

## Below-grade and in-slab installation

Alternative methods to overhead piping include below-grade and in-slab piping. In these installations, the pipe is laid in a trench or secured to steel-reinforcing bar (rebar) or wire mesh and routed to the desired locations. The piping system is pressurized (usually 20 psi above working pressure) and buried. Because PEX piping is available in long, continuous lengths, it is an ideal material for running below grade or in-slab without fittings. (See **page 84** for proper trench preparation.) Always follow local code when burying Uponor PEX pipe as some jurisdictions require additional sleeving and protection.

### Fittings for below-grade and in-slab

Uponor EP and LF brass fittings are all approved for use in below-grade and in-slab applications. Uponor recommends EP fittings for in-slab applications where required.

Uponor's LF brass is approved for direct burial in soil per NSF/ANSI Standard 14 testing which established minimum performance criteria for dezincification resistance (DZR) and stress-corrosion cracking (SCC) resistance for PEX fittings intended for potable water.

### Termiticides and pesticides

Uponor AquaPEX piping for hot- and cold-water distribution is approved for installation directly in soil (below-grade) or in concrete (in-slab) where soil termiticide/pesticide treatment is required. This is especially useful in slab-on-grade

construction. See **page 88** for information about termiticides.

## Pre-insulated Uponor AquaPEX piping

Pre-insulated Uponor AquaPEX piping is approved for use in below-grade and in-slab applications. For below-grade applications, Uponor recommends the use of pre-insulated AquaPEX with a minimum 1"-thick insulation due to static soil loads.

Protect piping where it enters and exits a concrete slab with 0.025" (0.064mm) thick protective material, such as HDPE wrapping, closed-cell pipe insulation, PVC elbows and sleeves or equivalent, that allow expansion and contraction of the piping. Ensure proper placement where piping exits the slab. These products are described as slab-penetration protection devices.

## Pre-sleeved Uponor AquaPEX piping

When using pre-sleeved Uponor AquaPEX piping or a protection sleeve, an annular gap between these protection devices and the PEX piping will exist. In such installations, fill the annular gap between the protection device and the PEX piping at the exposed ends to help prevent pathways for pests and the mistaken application of harmful chemicals into the space between the PEX piping and the protection device. Use only sealants that are compatible with PEX piping.

**Note:** The following products are appropriate for use when sealing PEX piping and slab-penetration protection devices:

- Latex caulk
- Latex foam
- Silicone sealant
- Polyurethane expanding foam

**Note:** Misapplication of these products could result in pooling or puddling of the products around the PEX piping, which is prohibited.

### Caution:

- If applying termiticides/pesticides while the installed PEX piping still has exposed open ends that are not yet connected to plumbing fixtures, cap, plug or close the ends of the piping to prevent these chemicals from entering the piping.
- Do not allow organic (petroleum-based) chemicals, petroleum distillates, termiticides or pesticides to come into direct contact with PEX piping.
- Fill the annular gap between PEX piping and slab-penetration protection devices (sleeving or PVC bend guides) at the ends of the piping to help prevent pathways for pests and the mistaken application of harmful chemicals into the space between the PEX piping and the protection device. Use only sealants that are compatible with PEX piping.
- When PEX piping is continuously sleeved below or above a slab (such as when using Pre-sleeved Uponor AquaPEX piping), never fill the space between the PEX piping and the sleeving with any liquid chemical, including pesticides or termiticides. Prevent pooling or puddling of these liquids around PEX piping.

- When it is necessary to re-treat soil near PEX piping, prevent the puddling or pooling of the termiticide/pesticide.

## Water service requirements

Uponor AquaPEX piping and associated fittings meet the requirements of American Water Works Association (AWWA) C904, *Cross-linked Polyethylene (PEX) Pressure Pipe, ½" (12mm) through 3" (76mm) for Water Service*.

Use only SDR9 compression fittings listed in compliance with AWWA C800 as referenced in AWWA C904 in water service applications when transferring from PEX to a corporation or curb stop. Be sure to use insert stiffeners when assembling a compression fitting with PEX. Commonly available SDR9 compression fitting manufacturers include:


- Ford Meter Box Company, Inc.®
- Mueller Company®
- A.Y. McDonald Mfg. Co.®
- Philmac®

For ½" to 1" water meter connections, Uponor offers direct ProPEX to NPSM swivel adapters in straight, elbow and valved configurations. Refer to the Uponor product catalog for more information.

## Trace wire

Uponor recommends the use of trace wire to facilitate the detection of underground pipe systems. Trace wire should be 14-gauge minimum solid copper with thermoplastic insulation suitable for direct burial. Refer to local code for further requirements.




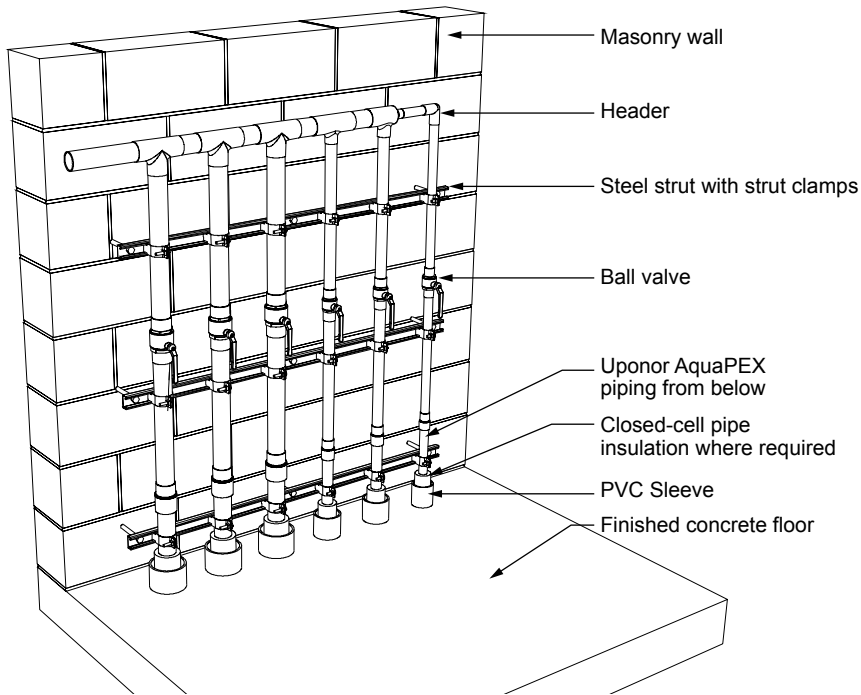

**Figure 6-43: Mechanical room transition (below-grade piping)**




**Figure 6-44: Uponor AquaPEX below grade**

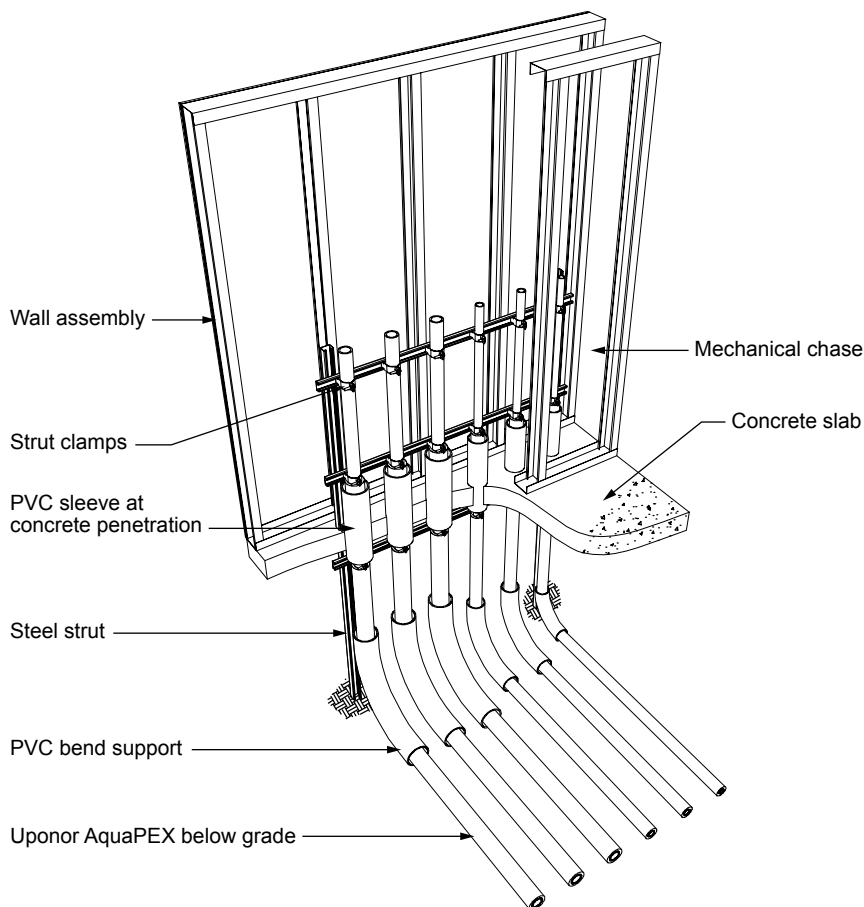


**Figure 6-45: Wet-wall chase transition (below-grade piping)**

## Trench bottom preparation

To achieve a satisfactory installation, it is essential that the soil provides stable and continuous support for the piping.

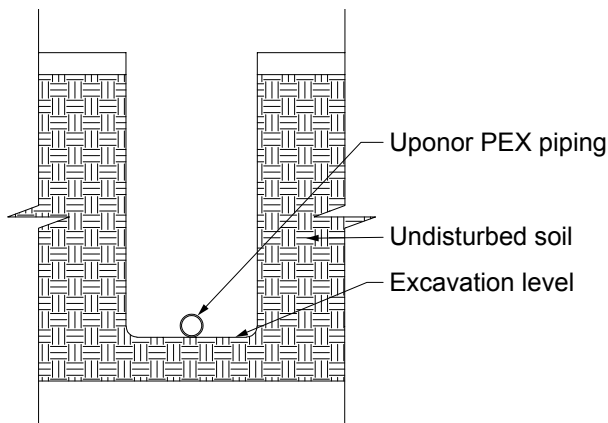

**Figure 6-46: Good soil conditions** — If the trench is dug smoothly, install the piping directly on the prepared bottom. The bottom must be flat with no hollows, lumps or rocks.

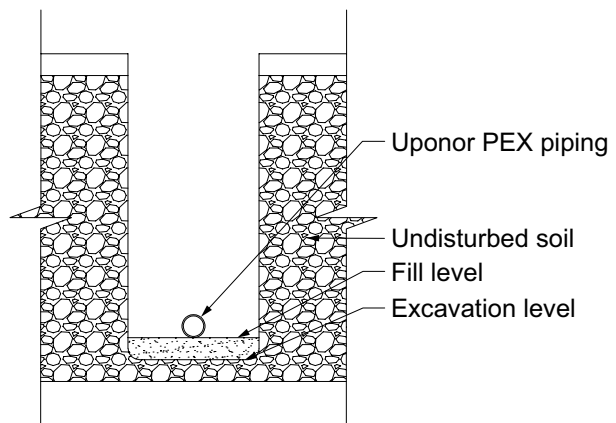

**Figure 6-47: Poor soil conditions** — With rocky, clay, muddy or other poor soil conditions, it may be necessary to prepare the trench bottom using granular material of such size and grading to provide a stable base. See local code for additional requirements.

## Piping embedment

Proper soil selection, placement and compaction are essential in the area around the piping. Backfill around the piping with sand or gravel that has a maximum particle size of  $\frac{3}{4}$ ".

Compact the initial backfill around the piping to provide adequate piping support and prevent settling. It is particularly important to adequately compact the soil around the tap connection. Uponor recommends pressurizing the piping prior to backfilling to reveal any damage. In heavy vehicular traffic areas, compact backfill to 90 percent of maximum soil density.

Do not use highly plastic clays, silts, organic materials, or sharp or large rocks as backfill in the immediate vicinity of the piping. Compact the backfill from the subgrade to a level per local code that will cover the piping 4" to 6" to provide protection around the piping

and to prevent settling that puts stress on the fittings and the piping.

For additional information about the proper installation practices of PEX piping in water-service applications, refer to AWWA C904.

### Installation

Install Uponor AquaPEX piping underground in a manner that ensures external loads will not subsequently cause a decrease in the vertical dimension of the cross section of the piping that exceeds 5 percent of the outside diameter. Install Uponor AquaPEX piping in a snaking pattern with sufficient slack in the line to allow for contraction of the line due to temperature change prior to backfilling. The linear expansion rate for Uponor AquaPEX piping is approximately 1.1" per 10°F temperature change per 100 ft. of piping (27.94mm per 5.56°C temperature change per 30.48m of piping).

**Note:** Do not use blocking to support the piping or change the piping grade. Do not install potable-water service piping in, under or above cesspools, septic tanks, septic-tank drainage fields or pits.



**Caution:** Do not install Uponor AquaPEX piping in soil environments contaminated with solvents, fuels, organic compounds, pesticides or other detrimental materials that may cause permeation, corrosion, degradation or structural failure of the piping. In areas where such conditions are suspected, perform a chemical analysis of the soil or groundwater to ascertain the acceptability of Uponor AquaPEX piping for the specific installation. Check local codes for additional requirements.

### Handling and repairs

Although Uponor AquaPEX piping is highly resistant to kinking and abrasion, take care while handling and installing the piping to prevent damage and possible failure of the piping. If damage occurs during installation, cut out the damaged area and repair before backfilling.

To reform kinked piping, see "Reforming kinked piping" on **page 64**. If the piping is damaged beyond its thermal-memory capacity, use a ProPEX coupling. Do not reuse or reclaim EP fittings.

## H-20 loads

When installing Uponor AquaPEX under a roadway, follow the same procedures as previously indicated with the following exception: Ensure the top of the piping is 16" below the bottom of the roadbed material as specified. You can also use a suitable steel or structural conduit to sleeve the Uponor AquaPEX pipe.

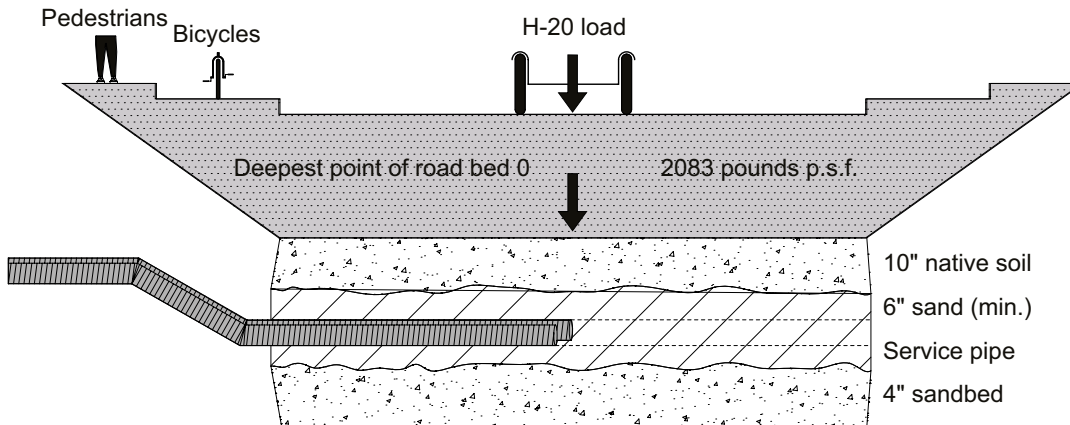


Figure 6-48: Traffic loads

### Horizontal directional drilling (HDD)

Horizontal directional drilling is used when trenching or excavation is not practical. A surface-launched drilling rig provides a steerable, trenchless method of installing underground pipes along a shallow arc bore path, resulting in minimal impact to surrounding areas. It is suitable for a variety of soil conditions.

HDD is further categorized into the following types:

- Mini-HDD
  - Distances less than 600 ft.
  - Depths up to 15 ft.
  - Pipe diameters up to 12"
- Equipment pullback capability of up to 20,000 lbs. and torque less than 950 ft-lbs.
- Maxi-HDD
  - Distances greater than 600 ft.
  - Depths up to 200 ft.
  - Pipe diameters up to 48"
  - Equipment pullback capability of up to 100,000 lbs. and torque up to 80,000 ft-lbs.

### Criteria for Uponor PEX piping in HDD applications

- Use Uponor PEX only as the follow pipe.
- Take precautionary steps to ensure piping does not come in contact with sharp objects.
- Do not exceed minimum bend radius of 6 times the O.D. of the piping
- Pressure test installed piping after installation to ensure the integrity of the piping has not been compromised.

For HDD applications using Uponor PEX piping, reference PPI TR-46 *Guidelines for Use of Mini-Horizontal Directional Drilling for Placement of High Density Polyethylene Pipe*.

### Joining methods and fittings

Use ProPEX or approved compression fittings to connect piping to itself or to the corporation and curb stops. Approved manufacturers are Ford Meter Box Company, Mueller Company, A.Y. McDonald Mfg. Co. and Philmac.

When using compression fittings with Uponor AquaPEX piping, a plastic or stainless-steel insert stiffener is required on the inside of the piping at the connection.

For applications requiring direct burial, use Uponor ProPEX EP or LF brass fittings for large-dimension Uponor AquaPEX piping up to 3".

| SDR9 Uponor PEX 12-hour pull |                                      |   |
|------------------------------|--------------------------------------|---|
| Nominal pipe size            | Tensile yield design (safety) factor | Allowable tensile load at 73°F/22.8°C - lbs (N) |
| ½"                           | 0.4                                  | 128 (569)                                       |
| ¾"                           | 0.4                                  | 248 (1,103)                                     |
| 1"                           | 0.4                                  | 411 (1,828)                                     |
| 1¼"                          | 0.4                                  | 615 (2,735)                                     |
| 1½"                          | 0.4                                  | 859 (3,821)                                     |
| 2"                           | 0.4                                  | 1,465 (6,516)                                   |
| 2½"                          | 0.4                                  | 2,239 (9,960)                                   |
| 3"                           | 0.4                                  | 3,169 (14,096)                                  |

Table 6-9: Safe pull force

**Note:** The method set forth in ASTM F1804 determines the allowable tensile load.

## Water system disinfection

Uponor recommends flushing an AquaPEX plumbing system with clean, potable water. When system disinfection is required, disinfect the piping in accordance with AWWA C651-86, *Standard for Disinfecting Water Mains*, or local codes.

**Important:** To prevent reduced service life of system components, do not allow disinfection solutions to remain in the system longer than 24 hours. Flush the system with potable water after disinfection. Use a chlorine solution of 50 parts per million (ppm) for 24 hours or 200 ppm for three hours for disinfection.

## Pressure-testing procedures

It is important to properly pressure test an Uponor plumbing system in accordance with local code. If testing with air, it is important the system pressure not exceed 120 psi.

The following procedure is acceptable for testing with air, water or a mixture of both for Uponor AquaPEX piping and ProPEX fittings or hybrid systems combined with metallic piping.



**Important:** When pressure testing hybrid systems (i.e., those that include both thermoplastic piping materials, such as CPVC or PP-R, and Uponor AquaPEX and ProPEX fittings), isolate the Uponor system from the other thermoplastic materials in the system before following the recommended procedure.

Also, consult the appropriate pipe manufacturer's installation recommendations when testing systems comprised of other thermoplastic materials.

The intent of pressure testing a domestic-water system is to meet local code requirements while ensuring the system is free from leaks. Pressure testing is not a substitute for the correct installation of an Uponor AquaPEX and ProPEX plumbing system. It is essential the Uponor system is accurately sized, supported and protected while also accounting for thermal movement during installation.

### Importance of conditioning PEX-a pipe

Uponor recommends conditioning the system at 1.5 times the test pressure, or 120

psi. The following conditioning procedure is unique to PEX-a pipe due to the high degree of crosslinking and associated thermal and elastic properties of the pipe.

When pressure is applied against the inner wall of PEX-a pipe, the internal diameter (I.D.) of the pipe will slightly increase, causing the pressure to drop while the system equalizes. After a period of 30 minutes, the PEX piping will be sufficiently conditioned to start the pressure test.

### Conditioning and sustained pressure testing procedure

1. Visually confirm all connections are properly made per Uponor installation guidelines.
2. Ensure all components, fixtures and equipment not rated for the test pressure are isolated from the test system.
3. Ensure all other thermoplastic piping materials are isolated from the test system.
4. Fill the system with potable water, air or a mixture of both.
5. Condition the system to 1.5 times the required test pressure for 30 minutes.
6. After conditioning the system for 30 minutes, quickly relieve excess pressure by opening the valve. Close the valve when the system has reached the desired test pressure.
7. Once the valve is closed, confirm a slight rise in pressure (3 to 6 psi). This increase will occur as the pipe's I.D. is shrinking from its conditioned state to equalize at the lower pressure.
8. Visually check for leakage and monitor the pressure for the duration specified by local code. (A typical pressure test can range from 2 to 24 hours.)
9. If there is no reduction in pressure, the system is presumed to be free from leaks.
10. Flush the system as required by code.

This will require constant pumping or cycling the valve and compressor to maintain a pressure of 1.5 times the test pressure. If cycling the valve and compressor, apply additional pressure once the psi has dropped 10 lbs.

6. After conditioning the system for 30 minutes, quickly relieve excess pressure by opening the valve. Close the valve when the system has reached the desired test pressure.

**Note:** Uponor recommends a test pressure of 80 psi (unless local code dictates higher pressures).

7. Once the valve is closed, confirm a slight rise in pressure (3 to 6 psi). This increase will occur as the pipe's I.D. is shrinking from its conditioned state to equalize at the lower pressure.

8. Visually check for leakage and monitor the pressure for the duration specified by local code. (A typical pressure test can range from 2 to 24 hours.)

9. If there is no reduction in pressure, the system is presumed to be free from leaks.

**Note:** Slight fluctuations of pressure are normal due to ambient temperature changes, especially during long durations (e.g., 24 hours).

10. Flush the system as required by code.

**Important:** If using water to pressure test the system, purge all water from the system prior to the ambient air temperatures falling to 32°F (0°C). Failing to remove the water from the system during freezing temperatures can result in damage to the piping and associated equipment.

Pressure testing graph

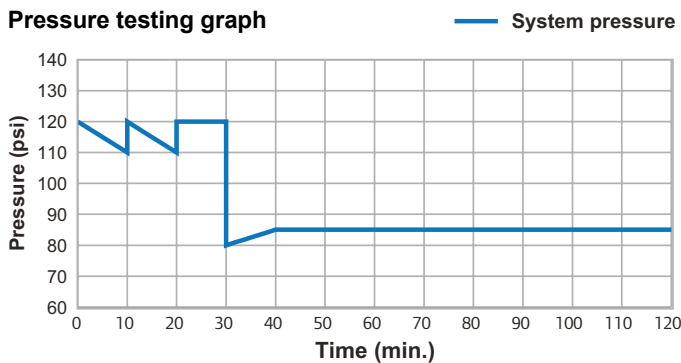


Figure 6-49: Pressure testing graph

## Insulation

Some local codes require insulation on cold-water lines to mitigate condensation that can occur on the outside of the piping. This is more specific to metallic piping. The thicker, more insulating walls of PEX piping give it a very low coefficient of thermal conductivity (0.219), whereas copper has a coefficient of thermal conductivity around 173-231. In short, PEX piping does not sweat like copper piping.

Best practice is to insulate all domestic hot-water supply and return piping as well as any hydronic distribution piping to conserve energy and maintain desired fluid temperature. Uponor also recommends insulating any piping installed in an unconditioned space or poorly ventilated areas with excessive moisture content. Always comply with local and energy codes.

## Icynene® spray foam insulation

Direct contact with Icynene® LD-C-50™ and MD-C-200™ spray foam insulation will not compromise the performance of Uponor PEX piping or EP fittings.

Icynene LD-C-50 is a light-density, open-cell, flexible and 100% water-blown polyurethane foam insulation. The spray formula has a nominal 0.5 lbs/ft<sup>3</sup> density and is a free-rise material.

Icynene MD-C-200 is a medium-density, open-cell, flexible and 100% water-blown polyurethane foam insulation. The spray formula has a nominal 2 lbs/ft<sup>3</sup> density and is a free-rise material.

Successful chemical compatibility testing has been performed on all Uponor PEX piping as well as all Uponor EP fitting materials, including Udel® GF-120, Udel® P-1700, Acudel® 22000 and Radel R® 5100. The compatibility evaluation showed no signs of cracking, crazing or reduction in ductility.

Icynene LD-C-50 and MD-C-200 must be installed by an Icynene-licensed dealer and factory-trained installer. For further information, refer to the Icynene installer's manual or contact Uponor Technical Services.

## Closed-cell spray foams

Closed-cell spray foam insulation will not compromise the performance of the Uponor AquaPEX piping or brass fittings, nor will it void the warranty as long as a maximum temperature of 250°F/121.1°C is not exceeded during the chemical reaction process of installation.

The majority of closed-cell spray foams on the market are polyurethane-based. Polyurethane, the harshest of all bases, is chemically compatible with both Uponor PEX piping and brass fittings.

The primary concern in using spray foams with Uponor PEX piping is the temperature limitations of the piping relative to the temperature outputs of the chemical reaction during application of the spray foam. **Table 6-10** shows temperatures with relation to the lift or depth of foam.

As shown in **Table 6-10**, an application of 1" of foam creates a maximum of 130°F/54.4°C. As the material is applied more generously, the reaction temperature increases. If more than 2" of lift is required, Uponor recommends using a two-lift application. Apply the first layer, 2" or less. Wait 15 minutes (the time required for the heat from a 2" lift to dissipate). Then, apply the second layer.

**Note:** Place an initial layer of spray foam over the PEX piping prior to the entirety of the foaming to insulate the lines from the heat generated by the chemicals.

| Depth of lift | Temperature  |
|---------------|--------------|
| 1"            | 130°F/54.4°C |
| 2"            | 200°F/93.3°C |
| 3"            | 320°F/160°C  |

**Table 6-10: Closed-cell spray foam temperatures in relation to depth of lift**

Uponor recommends closed-cell insulation for use with Uponor PEX piping and brass fittings. EP fittings require an overwrap of 4 to 6 mil poly or other suitable waterproof protection where contact is possible.

## Recessed light fixtures

Do not install Uponor AquaPEX within 12" of any recessed lighting fixtures unless the piping is protected with a suitable insulation, such as closed-cell polyurethane, polyethylene and polyolefin-based products, or the light fixture is I.C.-rated.

In an application using I.C.-rated light fixtures, the minimum clearance to the PEX pipe is 2" unless protected with a suitable insulation, such as closed-cell polyurethane, polyethylene and polyolefin-based products.

## Painting Uponor AquaPEX

It is acceptable to use latex and acrylic-based paint, such as 100 percent acrylic exterior latex house paint, with Uponor AquaPEX. These products will not harm the molecular structure or integrity of the PEX piping.

## Termiticides/pesticides

Liquid termiticides/pesticides are often applied to treat the soil below the concrete slabs of slab-on-grade structures. The treatment creates a barrier to prevent termites and pests from infiltrating the floor of the structure. PEX piping for plumbing applications is often installed within slabs or below slabs (in trenches in the soil) below the soil that is treated. Liquid termiticides/pesticides use a liquid solvent to carry the active ingredients. These solvents can be categorized as one of two types: organic solvent-based (also known as petroleum solvent-based) and water-based (water solvent-based).

The type of solvent used in a termiticide/pesticide will affect its ability to permeate through various materials. Organic-based termiticides/pesticides have largely disappeared from the North American marketplace for this application, and the majority of products available today are water-based. Water-based products are generally safer for the environment and pose less risk of infiltration into PEX piping.

Available data indicates the solvents used in liquid termiticides/pesticides will soak into the ground and/or evaporate before they can pass through the wall of polyethylene piping. The data also indicates these solvents are prevented from passing through the wall of polyethylene piping because of the large size of the water- or organic-solvent molecules, relative to the size of the molecules in the piping itself. Once liquid solvents have dissipated or evaporated, the solids that remain behind cannot permeate through the walls of polyethylene or PEX piping because of the molecular size.

Additional research shows that water-based termiticides/pesticides are of sufficiently large molecular size to completely prevent permeation through polyethylene and PEX piping. Instances of water-based termiticides/pesticides permeating through polyethylene or PEX piping are not known. Pesticides have not been found to be corrosive or have polymer degradation.

Although all research data and anecdotal evidence strongly suggest there are no permeation issues with water-based termiticides/pesticides and PEX, take extra caution to ensure safe installation of PEX piping and to prevent misapplication or pooling/puddling of the liquid termiticides/pesticides around PEX piping.

## Supporting research

A study done in 2001 in Australia, titled "Investigating the Possible Permeation of Organic Chemicals Commonly Used in Termiticide Barrier Treatments through Polyethylene Water Pipes," indicated that "migration of pesticide constituents and their associated solvents, through the polyethylene pipe, did not occur, indicating that the concentration of solvents (even in the saturated soil) was not high enough to cause permeation of the solvents through the polyethylene pipe wall (within the 16-week period of study)." The study also stated "this indicates that the concentration of these constituents in the soil in contact with the pipes was not high enough to develop a positive diffusion pressure and cause the constituents to be detected in the water." The study was conducted using organic solvent-based pesticides, which are known to be more aggressive than water-based pesticides. Therefore, the results are valid for organic solvent-based pesticides and water-based pesticides.

Research conducted by Dr. Michael R. Hoffman of the California Institute of Technology (2005) indicates that the ability of a chemical compound to permeate a material is correlated directly with the octanol-water partition coefficients of the individual organic chemicals. The octanol-

water partition coefficient is a relative measure of the hydrophobic nature of the organic compounds. In spite of a measurable tendency to partition into plastic material, the ability of these compounds is retarded substantially given the low measured diffusion coefficients for selected chemicals. For example, a PEX piping wall thickness of 5mm and a typical diffusion coefficient for organic compound migration of  $1.0 \times 10^{-12}$  cm<sup>2</sup>/s, the time to permeate through the walls, would be  $2.5 \times 1,011$  seconds or approximately 8,000 years. If the wall thickness was reduced to 2mm, then the time to permeate completely through the pipe wall would be reduced to 1,300 years.

**Note:** Crosslinked polyethylene (PEX) piping is assumed to behave similarly to polyethylene water piping.

## Appendix A: Fluid properties

### 100% water

| Temperature °F (°C) | Density (lbm/ft <sup>3</sup> ) | Dynamic viscosity [lbm/(ft*sec)] |
|---------------------|--------------------------------|----------------------------------|
|                     | $\rho$                         | $\mu$                            |
| 40 (4.44)           | 62.42                          | 1.31E-03                         |
| 45 (7.22)           | 62.42                          | 1.09E-03                         |
| 50 (10)             | 62.41                          | 8.78E-04                         |
| 55 (12.78)          | 62.39                          | 8.16E-04                         |
| 60 (15.56)          | 62.36                          | 7.54E-04                         |
| 65 (18.33)          | 62.33                          | 7.05E-04                         |
| 70 (21.11)          | 62.30                          | 6.56E-04                         |
| 80 (26.67)          | 62.22                          | 5.76E-04                         |
| 90 (32.22)          | 62.12                          | 5.12E-04                         |
| 100 (37.77)         | 62.00                          | 4.58E-04                         |
| 110 (43.33)         | 61.86                          | 4.13E-04                         |
| 120 (48.89)         | 61.71                          | 3.74E-04                         |
| 130 (54.44)         | 61.55                          | 3.42E-04                         |
| 140 (60)            | 61.38                          | 3.14E-04                         |
| 150 (65.56)         | 61.19                          | 2.89E-04                         |
| 160 (71.11)         | 60.99                          | 2.68E-04                         |
| 170 (76.67)         | 60.79                          | 2.48E-04                         |
| 180 (82.22)         | 60.57                          | 2.32E-04                         |
| 190 (87.78)         | 60.35                          | 2.17E-04                         |
| 200 (93.33)         | 60.12                          | 2.04E-04                         |





## Appendix B:

### Uponor PEX friction loss tables

#### 1/4" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |      |             |              |              |               |               |               |               |               |
|---------------------------------|------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|
| Velocity (ft/s)                 | gpm  | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |
| 1.5                             | 0.21 | 4.18        | 3.50         | 3.22         | 3.00          | 2.82          | 2.68          | 2.55          | 2.45          |
| 1.6                             | 0.23 | 4.65        | 3.90         | 3.59         | 3.35          | 3.16          | 3.00          | 2.86          | 2.74          |
| 1.7                             | 0.24 | 5.15        | 4.32         | 3.98         | 3.72          | 3.50          | 3.33          | 3.17          | 3.04          |
| 1.8                             | 0.26 | 5.67        | 4.76         | 4.39         | 4.10          | 3.87          | 3.67          | 3.51          | 3.36          |
| 1.9                             | 0.27 | 6.20        | 5.22         | 4.82         | 4.50          | 4.25          | 4.03          | 3.85          | 3.70          |
| 2.0                             | 0.28 | 6.76        | 5.70         | 5.26         | 4.92          | 4.64          | 4.41          | 4.21          | 4.04          |
| 2.1                             | 0.30 | 7.34        | 6.19         | 5.72         | 5.35          | 5.05          | 4.80          | 4.59          | 4.40          |
| 2.2                             | 0.31 | 7.93        | 6.70         | 6.20         | 5.80          | 5.47          | 5.21          | 4.98          | 4.78          |
| 2.3                             | 0.33 | 8.55        | 7.23         | 6.69         | 6.26          | 5.91          | 5.63          | 5.38          | 5.16          |
| 2.4                             | 0.34 | 9.19        | 7.78         | 7.20         | 6.74          | 6.37          | 6.06          | 5.80          | 5.57          |
| 2.5                             | 0.36 | 9.84        | 8.34         | 7.72         | 7.23          | 6.84          | 6.51          | 6.23          | 5.98          |
| 2.6                             | 0.37 | 10.52       | 8.92         | 8.26         | 7.74          | 7.32          | 6.97          | 6.67          | 6.41          |
| 2.7                             | 0.38 | 11.21       | 9.52         | 8.82         | 8.27          | 7.82          | 7.45          | 7.13          | 6.85          |
| 2.8                             | 0.40 | 11.92       | 10.13        | 9.39         | 8.81          | 8.33          | 7.94          | 7.60          | 7.30          |
| 2.9                             | 0.41 | 12.65       | 10.76        | 9.98         | 9.36          | 8.86          | 8.44          | 8.08          | 7.77          |
| 3.0                             | 0.43 | 13.40       | 11.41        | 10.58        | 9.93          | 9.40          | 8.96          | 8.58          | 8.25          |
| 3.1                             | 0.44 | 14.17       | 12.07        | 11.20        | 10.51         | 9.95          | 9.49          | 9.09          | 8.74          |
| 3.2                             | 0.46 | 14.95       | 12.75        | 11.83        | 11.11         | 10.52         | 10.03         | 9.61          | 9.24          |
| 3.3                             | 0.47 | 15.76       | 13.44        | 12.48        | 11.72         | 11.10         | 10.59         | 10.15         | 9.76          |
| 3.4                             | 0.48 | 16.58       | 14.15        | 13.14        | 12.35         | 11.70         | 11.16         | 10.69         | 10.29         |
| 3.5                             | 0.50 | 17.42       | 14.88        | 13.82        | 12.99         | 12.31         | 11.74         | 11.26         | 10.83         |
| 3.6                             | 0.51 | 18.27       | 15.62        | 14.51        | 13.64         | 12.93         | 12.34         | 11.83         | 11.39         |
| 3.7                             | 0.53 | 19.15       | 16.37        | 15.22        | 14.31         | 13.57         | 12.95         | 12.42         | 11.95         |
| 3.8                             | 0.54 | 20.04       | 17.15        | 15.95        | 15.00         | 14.22         | 13.58         | 13.02         | 12.53         |
| 3.9                             | 0.55 | 20.95       | 17.94        | 16.68        | 15.69         | 14.89         | 14.21         | 13.63         | 13.13         |
| 4.0                             | 0.57 | 21.88       | 18.74        | 17.44        | 16.41         | 15.56         | 14.86         | 14.26         | 13.73         |
| 4.1                             | 0.58 | 22.82       | 19.56        | 18.20        | 17.13         | 16.25         | 15.52         | 14.90         | 14.35         |
| 4.2                             | 0.60 | 23.78       | 20.39        | 18.98        | 17.87         | 16.96         | 16.20         | 15.55         | 14.98         |
| 4.3                             | 0.61 | 24.76       | 21.24        | 19.78        | 18.62         | 17.68         | 16.89         | 16.21         | 15.62         |
| 4.4                             | 0.63 | 25.75       | 22.11        | 20.59        | 19.39         | 18.41         | 17.59         | 16.88         | 16.27         |
| 4.5                             | 0.64 | 26.76       | 22.99        | 21.41        | 20.17         | 19.15         | 18.30         | 17.57         | 16.94         |
| 4.6                             | 0.65 | 27.79       | 23.88        | 22.25        | 20.96         | 19.91         | 19.03         | 18.27         | 17.61         |
| 4.7                             | 0.67 | 28.83       | 24.79        | 23.11        | 21.77         | 20.68         | 19.77         | 18.99         | 18.30         |
| 4.8                             | 0.68 | 29.90       | 25.71        | 23.97        | 22.59         | 21.46         | 20.52         | 19.71         | 19.00         |
| 4.9                             | 0.70 | 30.97       | 26.65        | 24.85        | 23.43         | 22.26         | 21.29         | 20.45         | 19.72         |
| 5.0                             | 0.71 | 32.07       | 27.61        | 25.75        | 24.28         | 23.07         | 22.07         | 21.20         | 20.44         |
| 5.1                             | 0.73 | 33.18       | 28.58        | 26.66        | 25.14         | 23.89         | 22.86         | 21.96         | 21.18         |
| 5.2                             | 0.74 | 34.30       | 29.56        | 27.58        | 26.01         | 24.73         | 23.66         | 22.73         | 21.93         |
| 5.3                             | 0.75 | 35.45       | 30.56        | 28.52        | 26.90         | 25.58         | 24.47         | 23.52         | 22.69         |
| 5.4                             | 0.77 | 36.61       | 31.57        | 29.47        | 27.80         | 26.44         | 25.30         | 24.32         | 23.46         |
| 5.5                             | 0.78 | 37.78       | 32.60        | 30.43        | 28.72         | 27.31         | 26.14         | 25.13         | 24.24         |
| 5.6                             | 0.80 | 38.97       | 33.64        | 31.41        | 29.64         | 28.20         | 26.99         | 25.95         | 25.04         |
| 5.7                             | 0.81 | 40.18       | 34.69        | 32.40        | 30.58         | 29.10         | 27.86         | 26.78         | 25.85         |
| 5.8                             | 0.82 | 41.40       | 35.76        | 33.41        | 31.54         | 30.01         | 28.73         | 27.63         | 26.67         |
| 5.9                             | 0.84 | 42.64       | 36.85        | 34.43        | 32.51         | 30.93         | 29.62         | 28.49         | 27.50         |
| 6.0                             | 0.85 | 43.90       | 37.94        | 35.46        | 33.49         | 31.87         | 30.52         | 29.36         | 28.34         |
| 6.1                             | 0.87 | 45.17       | 39.06        | 36.50        | 34.48         | 32.82         | 31.44         | 30.24         | 29.19         |
| 6.2                             | 0.88 | 46.45       | 40.18        | 37.56        | 35.49         | 33.78         | 32.36         | 31.13         | 30.06         |
| 6.3                             | 0.90 | 47.75       | 41.33        | 38.64        | 36.50         | 34.76         | 33.30         | 32.04         | 30.94         |
| 6.4                             | 0.91 | 49.07       | 42.48        | 39.72        | 37.54         | 35.74         | 34.25         | 32.95         | 31.82         |
| 6.5                             | 0.92 | 50.41       | 43.65        | 40.82        | 38.58         | 36.74         | 35.21         | 33.88         | 32.73         |
| 6.6                             | 0.94 | 51.75       | 44.83        | 41.94        | 39.64         | 37.76         | 36.18         | 34.82         | 33.64         |
| 6.7                             | 0.95 | 53.12       | 46.03        | 43.06        | 40.71         | 38.78         | 37.17         | 35.78         | 34.56         |

#### 1/4" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |      |             |              |              |               |               |               |               |               |
|---------------------------------|------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|
| Velocity (ft/s)                 | gpm  | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |
| 6.8                             | 0.97 | 54.50       | 47.24        | 44.20        | 41.79         | 39.82         | 38.17         | 36.74         | 35.49         |
| 6.9                             | 0.98 | 55.89       | 48.47        | 45.36        | 42.89         | 40.87         | 39.18         | 37.72         | 36.44         |
| 7.0                             | 1.00 | 57.30       | 49.70        | 46.52        | 44.00         | 41.93         | 40.20         | 38.70         | 37.40         |
| 7.1                             | 1.01 | 58.73       | 50.96        | 47.70        | 45.12         | 43.00         | 41.23         | 39.70         | 38.37         |
| 7.2                             | 1.02 | 60.17       | 52.22        | 48.90        | 46.25         | 44.09         | 42.28         | 40.71         | 39.35         |
| 7.3                             | 1.04 | 61.63       | 53.50        | 50.10        | 47.40         | 45.19         | 43.34         | 41.74         | 40.34         |
| 7.4                             | 1.05 | 63.10       | 54.80        | 51.32        | 48.56         | 46.30         | 44.41         | 42.77         | 41.34         |
| 7.5                             | 1.07 | 64.58       | 56.10        | 52.55        | 49.73         | 47.42         | 45.49         | 43.82         | 42.36         |
| 7.6                             | 1.08 | 66.09       | 57.43        | 53.80        | 50.92         | 48.55         | 46.58         | 44.87         | 43.38         |
| 7.7                             | 1.09 | 67.60       | 58.76        | 55.06        | 52.12         | 49.70         | 47.69         | 45.94         | 44.42         |
| 7.8                             | 1.11 | 69.13       | 60.11        | 56.33        | 53.33         | 50.86         | 48.80         | 47.02         | 45.47         |
| 7.9                             | 1.12 | 70.68       | 61.47        | 57.61        | 54.55         | 52.03         | 49.93         | 48.11         | 46.53         |
| 8.0                             | 1.14 | 72.24       | 62.85        | 58.91        | 55.78         | 53.22         | 51.07         | 49.22         | 47.60         |
| 8.1                             | 1.15 | 73.82       | 64.24        | 60.22        | 57.03         | 54.41         | 52.23         | 50.33         | 48.68         |
| 8.2                             | 1.17 | 75.41       | 65.64        | 61.54        | 58.29         | 55.62         | 53.39         | 51.46         | 49.77         |
| 8.3                             | 1.18 | 77.02       | 67.05        | 62.88        | 59.56         | 56.84         | 54.56         | 52.59         | 50.87         |
| 8.4                             | 1.19 | 78.64       | 68.48        | 64.23        | 60.85         | 58.07         | 55.75         | 53.74         | 51.99         |
| 8.5                             | 1.21 | 80.27       | 69.93        | 65.59        | 62.14         | 59.31         | 56.95         | 54.90         | 53.12         |
| 8.6                             | 1.22 | 81.92       | 71.38        | 66.96        | 63.45         | 60.57         | 58.16         | 56.08         | 54.25         |
| 8.7                             | 1.24 | 83.59       | 72.85        | 68.35        | 64.77         | 61.84         | 59.38         | 57.26         | 55.40         |
| 8.8                             | 1.25 | 85.27       | 74.34        | 69.75        | 66.11         | 63.12         | 60.62         | 58.45         | 56.56         |
| 8.9                             | 1.27 | 86.96       | 75.83        | 71.16        | 67.45         | 64.41         | 61.86         | 59.66         | 57.73         |
| 9.0                             | 1.28 | 88.67       | 77.34        | 72.59        | 68.81         | 65.71         | 63.12         | 60.88         | 58.92         |
| 9.1                             | 1.29 | 90.40       | 78.86        | 74.03        | 70.18         | 67.03         | 64.39         | 62.11         | 60.11         |
| 9.2                             | 1.31 | 92.14       | 80.40        | 75.48        | 71.57         | 68.35         | 65.67         | 63.35         | 61.31         |
| 9.3                             | 1.32 | 93.89       | 81.95        | 76.94        | 72.96         | 69.69         | 66.96         | 64.60         | 62.53         |
| 9.4                             | 1.34 | 95.66       | 83.51        | 78.42        | 74.37         | 71.04         | 68.27         | 65.86         | 63.76         |
| 9.5                             | 1.35 | 97.44       | 85.09        | 79.91        | 75.79         | 72.41         | 69.58         | 67.13         | 64.99         |
| 9.6                             | 1.37 | 99.24       | 86.68        | 81.41        | 77.22         | 73.78         | 70.91         | 68.42         | 66.24         |
| 9.7                             | 1.38 | 101.05      | 88.28        | 82.92        | 78.67         | 75.17         | 72.25         | 69.71         | 67.50         |
| 9.8                             | 1.39 | 102.87      | 89.89        | 84.45        | 80.12         | 76.57         | 73.60         | 71.02         | 68.77         |
| 9.9                             | 1.41 | 104.71      | 91.52        | 85.99        | 81.59         | 77.98         | 74.96         | 72.34         | 70.05         |
| 10.0                            | 1.42 | 106.57      | 93.16        | 87.54        | 83.07         | 79.40         | 76.33         | 73.67         | 71.35         |
| 10.1                            | 1.44 | 108.43      | 94.82        | 89.10        | 84.56         | 80.83         | 77.72         | 75.01         | 72.65         |
| 10.2                            | 1.45 | 110.32      | 96.49        | 90.68        | 86.07         | 82.28         | 79.11         | 76.36         | 73.96         |
| 10.3                            | 1.46 | 112.21      | 98.17        | 92.27        | 87.58         | 83.73         | 80.52         | 77.73         | 75.29         |
| 10.4                            | 1.48 | 114.12      | 99.86        | 93.87        | 89.11         | 85.20         | 81.94         | 79.10         | 76.63         |
| 10.5                            | 1.49 | 116.05      | 101.57       | 95.49        | 90.65         | 86.68         | 83.37         | 80.49         | 77.97         |
| 10.6                            | 1.51 | 117.99      | 103.28       | 97.11        | 92.21         | 88.18         | 84.81         | 81.89         | 79.33         |
| 10.7                            | 1.52 | 119.94      | 105.02       | 98.75        | 93.77         | 89.68         | 86.26         | 83.29         | 80.70         |
| 10.8                            | 1.54 | 121.91      | 106.76       | 100.40       | 95.35         | 91.19         | 87.72         | 84.71         | 82.08         |
| 10.9                            | 1.55 | 123.89      | 108.52       | 102.07       | 96.94         | 92.72         | 89.20         | 86.14         | 83.47         |
| 11.0                            | 1.56 | 125.89      | 110.29       | 103.74       | 98.54         | 94.26         | 90.69         | 87.58         | 84.87         |
| 11.1                            | 1.58 | 127.90      | 112.07       | 105.43       | 100.15        | 95.81         | 92.18         | 89.04         | 86.29         |
| 11.2                            | 1.59 | 129.92      | 113.87       | 107.13       | 101.77        | 97.37         | 93.69         | 90.50         | 87.71         |
| 11.3                            | 1.61 | 131.96      | 115.68       | 108.85       | 103.41        | 98.95         | 95.21         | 91.98         | 89.14         |
| 11.4                            | 1.62 | 134.01      | 117.50       | 110.57       | 105.06        | 100.53        | 96.75         | 93.46         | 90.59         |
| 11.5                            | 1.64 | 136.08      | 119.34       | 112.31       | 106.72        | 102.13        | 98.29         | 94.96         | 92.05         |
| 11.6                            | 1.65 | 138.16      | 121.19       | 114.06       | 108.39        | 103.74        | 99.84         | 96.47         | 93.51         |
| 11.7                            | 1.66 | 140.25      | 123.05       | 115.82       | 110.08        | 105.36        | 101.41        | 97.99         | 94.99         |
| 11.8                            | 1.68 | 142.36      | 124.92       | 117.60       | 111.77        | 106.99        | 102.99        | 99.52         | 96.48         |
| 11.9                            | 1.69 | 144.49      | 126.81       | 119.38       | 113.48        | 108.63        | 104.57        | 101.06        | 97.98         |
| 12.0                            | 1.71 | 146.62      | 128.70       | 121.18       | 115.20        | 110.28        | 106.17        | 102.61        | 99.49         |

# Uponor PEX friction loss tables

## 3/8" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |      |             |              |              |               |               |               |               |               |  |
|---------------------------------|------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|--|
| Velocity (ft/s)                 | gpm  | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |  |
| 1.5                             | 0.45 | 2.54        | 2.14         | 1.98         | 1.85          | 1.74          | 1.66          | 1.58          | 1.52          |  |
| 1.6                             | 0.48 | 2.83        | 2.39         | 2.21         | 2.07          | 1.95          | 1.85          | 1.77          | 1.70          |  |
| 1.7                             | 0.51 | 3.14        | 2.65         | 2.45         | 2.29          | 2.17          | 2.06          | 1.97          | 1.89          |  |
| 1.8                             | 0.54 | 3.45        | 2.92         | 2.70         | 2.53          | 2.39          | 2.27          | 2.17          | 2.09          |  |
| 1.9                             | 0.57 | 3.78        | 3.21         | 2.97         | 2.78          | 2.63          | 2.50          | 2.39          | 2.29          |  |
| 2.0                             | 0.60 | 4.13        | 3.50         | 3.24         | 3.04          | 2.87          | 2.73          | 2.61          | 2.51          |  |
| 2.1                             | 0.63 | 4.48        | 3.81         | 3.53         | 3.31          | 3.13          | 2.98          | 2.85          | 2.73          |  |
| 2.2                             | 0.66 | 4.85        | 4.12         | 3.82         | 3.59          | 3.39          | 3.23          | 3.09          | 2.97          |  |
| 2.3                             | 0.69 | 5.23        | 4.45         | 4.13         | 3.87          | 3.66          | 3.49          | 3.34          | 3.21          |  |
| 2.4                             | 0.72 | 5.62        | 4.79         | 4.44         | 4.17          | 3.95          | 3.76          | 3.60          | 3.46          |  |
| 2.5                             | 0.75 | 6.03        | 5.14         | 4.77         | 4.48          | 4.24          | 4.04          | 3.87          | 3.72          |  |
| 2.6                             | 0.78 | 6.44        | 5.50         | 5.11         | 4.79          | 4.54          | 4.33          | 4.14          | 3.98          |  |
| 2.7                             | 0.81 | 6.87        | 5.87         | 5.45         | 5.12          | 4.85          | 4.62          | 4.43          | 4.26          |  |
| 2.8                             | 0.84 | 7.31        | 6.25         | 5.81         | 5.46          | 5.17          | 4.93          | 4.72          | 4.54          |  |
| 2.9                             | 0.87 | 7.76        | 6.64         | 6.17         | 5.80          | 5.50          | 5.24          | 5.02          | 4.83          |  |
| 3.0                             | 0.90 | 8.22        | 7.04         | 6.55         | 6.15          | 5.83          | 5.57          | 5.33          | 5.13          |  |
| 3.1                             | 0.93 | 8.70        | 7.45         | 6.93         | 6.52          | 6.18          | 5.90          | 5.65          | 5.44          |  |
| 3.2                             | 0.96 | 9.18        | 7.87         | 7.33         | 6.89          | 6.53          | 6.24          | 5.98          | 5.75          |  |
| 3.3                             | 0.99 | 9.68        | 8.30         | 7.73         | 7.27          | 6.90          | 6.58          | 6.31          | 6.08          |  |
| 3.4                             | 1.02 | 10.19       | 8.75         | 8.14         | 7.66          | 7.27          | 6.94          | 6.65          | 6.41          |  |
| 3.5                             | 1.05 | 10.71       | 9.20         | 8.56         | 8.06          | 7.65          | 7.30          | 7.00          | 6.74          |  |
| 3.6                             | 1.08 | 11.24       | 9.66         | 9.00         | 8.47          | 8.04          | 7.68          | 7.36          | 7.09          |  |
| 3.7                             | 1.11 | 11.78       | 10.13        | 9.44         | 8.89          | 8.43          | 8.06          | 7.73          | 7.44          |  |
| 3.8                             | 1.14 | 12.33       | 10.61        | 9.89         | 9.31          | 8.84          | 8.45          | 8.10          | 7.80          |  |
| 3.9                             | 1.17 | 12.89       | 11.10        | 10.35        | 9.75          | 9.25          | 8.84          | 8.49          | 8.17          |  |
| 4.0                             | 1.20 | 13.47       | 11.60        | 10.81        | 10.19         | 9.68          | 9.25          | 8.88          | 8.55          |  |
| 4.1                             | 1.23 | 14.05       | 12.11        | 11.29        | 10.64         | 10.11         | 9.66          | 9.27          | 8.93          |  |
| 4.2                             | 1.26 | 14.65       | 12.63        | 11.78        | 11.10         | 10.55         | 10.08         | 9.68          | 9.33          |  |
| 4.3                             | 1.29 | 15.25       | 13.16        | 12.27        | 11.57         | 10.99         | 10.51         | 10.09         | 9.73          |  |
| 4.4                             | 1.32 | 15.87       | 13.69        | 12.78        | 12.05         | 11.45         | 10.95         | 10.51         | 10.13         |  |
| 4.5                             | 1.35 | 16.50       | 14.24        | 13.29        | 12.54         | 11.91         | 11.39         | 10.94         | 10.55         |  |
| 4.6                             | 1.38 | 17.13       | 14.80        | 13.81        | 13.03         | 12.39         | 11.85         | 11.38         | 10.97         |  |
| 4.7                             | 1.41 | 17.78       | 15.36        | 14.35        | 13.53         | 12.87         | 12.31         | 11.82         | 11.40         |  |
| 4.8                             | 1.44 | 18.44       | 15.94        | 14.89        | 14.05         | 13.36         | 12.78         | 12.28         | 11.84         |  |
| 4.9                             | 1.47 | 19.11       | 16.52        | 15.43        | 14.57         | 13.85         | 13.25         | 12.73         | 12.28         |  |
| 5.0                             | 1.50 | 19.79       | 17.12        | 15.99        | 15.10         | 14.36         | 13.74         | 13.20         | 12.73         |  |
| 5.1                             | 1.53 | 20.48       | 17.72        | 16.56        | 15.63         | 14.87         | 14.23         | 13.68         | 13.19         |  |
| 5.2                             | 1.56 | 21.18       | 18.33        | 17.13        | 16.18         | 15.39         | 14.73         | 14.16         | 13.66         |  |
| 5.3                             | 1.59 | 21.89       | 18.95        | 17.72        | 16.73         | 15.92         | 15.24         | 14.65         | 14.13         |  |
| 5.4                             | 1.62 | 22.61       | 19.58        | 18.31        | 17.29         | 16.46         | 15.75         | 15.15         | 14.61         |  |
| 5.5                             | 1.65 | 23.34       | 20.22        | 18.91        | 17.86         | 17.00         | 16.28         | 15.65         | 15.10         |  |
| 5.6                             | 1.68 | 24.08       | 20.87        | 19.52        | 18.44         | 17.55         | 16.81         | 16.16         | 15.60         |  |
| 5.7                             | 1.71 | 24.83       | 21.53        | 20.14        | 19.03         | 18.11         | 17.35         | 16.68         | 16.10         |  |
| 5.8                             | 1.74 | 25.59       | 22.20        | 20.77        | 19.62         | 18.68         | 17.89         | 17.21         | 16.61         |  |
| 5.9                             | 1.77 | 26.36       | 22.87        | 21.40        | 20.23         | 19.26         | 18.45         | 17.74         | 17.13         |  |
| 6.0                             | 1.80 | 27.13       | 23.56        | 22.04        | 20.84         | 19.84         | 19.01         | 18.28         | 17.65         |  |
| 6.1                             | 1.83 | 27.92       | 24.25        | 22.70        | 21.46         | 20.44         | 19.58         | 18.83         | 18.18         |  |
| 6.2                             | 1.86 | 28.72       | 24.95        | 23.36        | 22.09         | 21.04         | 20.16         | 19.39         | 18.72         |  |
| 6.3                             | 1.89 | 29.53       | 25.66        | 24.03        | 22.72         | 21.64         | 20.74         | 19.95         | 19.27         |  |
| 6.4                             | 1.92 | 30.35       | 26.38        | 24.70        | 23.36         | 22.26         | 21.33         | 20.53         | 19.82         |  |
| 6.5                             | 1.95 | 31.18       | 27.11        | 25.39        | 24.02         | 22.88         | 21.93         | 21.10         | 20.38         |  |
| 6.6                             | 1.98 | 32.02       | 27.85        | 26.08        | 24.68         | 23.51         | 22.54         | 21.69         | 20.95         |  |
| 6.7                             | 2.01 | 32.87       | 28.59        | 26.79        | 25.34         | 24.15         | 23.15         | 22.28         | 21.52         |  |

## 3/8" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |      |             |              |              |               |               |               |               |               |  |
|---------------------------------|------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|--|
| Velocity (ft/s)                 | gpm  | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |  |
| 6.8                             | 2.04 | 33.73       | 29.35        | 27.50        | 26.02         | 24.80         | 23.77         | 22.88         | 22.10         |  |
| 6.9                             | 2.07 | 34.59       | 30.11        | 28.22        | 26.70         | 25.45         | 24.40         | 23.49         | 22.69         |  |
| 7.0                             | 2.10 | 35.47       | 30.88        | 28.94        | 27.39         | 26.11         | 25.04         | 24.10         | 23.29         |  |
| 7.1                             | 2.13 | 36.36       | 31.66        | 29.68        | 28.09         | 26.78         | 25.68         | 24.73         | 23.89         |  |
| 7.2                             | 2.16 | 37.25       | 32.45        | 30.42        | 28.80         | 27.46         | 26.33         | 25.36         | 24.50         |  |
| 7.3                             | 2.19 | 38.16       | 33.25        | 31.17        | 29.51         | 28.14         | 26.99         | 25.99         | 25.12         |  |
| 7.4                             | 2.22 | 39.08       | 34.06        | 31.94        | 30.24         | 28.84         | 27.66         | 26.64         | 25.74         |  |
| 7.5                             | 2.25 | 40.00       | 34.87        | 32.70        | 30.97         | 29.54         | 28.33         | 27.29         | 26.37         |  |
| 7.6                             | 2.28 | 40.93       | 35.70        | 33.48        | 31.71         | 30.24         | 29.01         | 27.94         | 27.01         |  |
| 7.7                             | 2.31 | 41.88       | 36.53        | 34.26        | 32.45         | 30.96         | 29.70         | 28.61         | 27.65         |  |
| 7.8                             | 2.34 | 42.83       | 37.37        | 35.06        | 33.21         | 31.68         | 30.40         | 29.28         | 28.30         |  |
| 7.9                             | 2.37 | 43.79       | 38.22        | 35.86        | 33.97         | 32.41         | 31.10         | 29.96         | 28.96         |  |
| 8.0                             | 2.40 | 44.77       | 39.08        | 36.67        | 34.74         | 33.15         | 31.81         | 30.65         | 29.63         |  |
| 8.1                             | 2.43 | 45.75       | 39.94        | 37.48        | 35.52         | 33.89         | 32.53         | 31.34         | 30.30         |  |
| 8.2                             | 2.46 | 46.74       | 40.82        | 38.31        | 36.30         | 34.64         | 33.25         | 32.04         | 30.98         |  |
| 8.3                             | 2.49 | 47.74       | 41.70        | 39.14        | 37.09         | 35.40         | 33.98         | 32.75         | 31.66         |  |
| 8.4                             | 2.52 | 48.75       | 42.59        | 39.98        | 37.90         | 36.17         | 34.72         | 33.46         | 32.36         |  |
| 8.5                             | 2.55 | 49.77       | 43.49        | 40.83        | 38.70         | 36.94         | 35.47         | 34.18         | 33.06         |  |
| 8.6                             | 2.58 | 50.79       | 44.40        | 41.69        | 39.52         | 37.73         | 36.22         | 34.91         | 33.76         |  |
| 8.7                             | 2.61 | 51.83       | 45.32        | 42.55        | 40.34         | 38.52         | 36.98         | 35.65         | 34.48         |  |
| 8.8                             | 2.64 | 52.88       | 46.24        | 43.43        | 41.17         | 39.31         | 37.75         | 36.39         | 35.20         |  |
| 8.9                             | 2.67 | 53.93       | 47.17        | 44.31        | 42.01         | 40.12         | 38.53         | 37.14         | 35.92         |  |
| 9.0                             | 2.70 | 55.00       | 48.11        | 45.20        | 42.86         | 40.93         | 39.31         | 37.90         | 36.66         |  |
| 9.1                             | 2.73 | 56.07       | 49.06        | 46.09        | 43.71         | 41.75         | 40.10         | 38.66         | 37.40         |  |
| 9.2                             | 2.76 | 57.15       | 50.02        | 47.00        | 44.58         | 42.57         | 40.89         | 39.43         | 38.14         |  |
| 9.3                             | 2.79 | 58.24       | 50.99        | 47.91        | 45.45         | 43.41         | 41.70         | 40.21         | 38.90         |  |
| 9.4                             | 2.82 | 59.34       | 51.96        | 48.83        | 46.32         | 44.25         | 42.51         | 40.99         | 39.66         |  |
| 9.5                             | 2.85 | 60.45       | 52.94        | 49.76        | 47.21         | 45.10         | 43.33         | 41.78         | 40.43         |  |
| 9.6                             | 2.88 | 61.57       | 53.94        | 50.69        | 48.10         | 45.95         | 44.15         | 42.58         | 41.20         |  |
| 9.7                             | 2.91 | 62.70       | 54.93        | 51.64        | 49.00         | 46.82         | 44.98         | 43.39         | 41.98         |  |
| 9.8                             | 2.94 | 63.84       | 55.94        | 52.59        | 49.91         | 47.69         | 45.82         | 44.20         | 42.77         |  |
| 9.9                             | 2.97 | 64.98       | 56.96        | 53.55        | 50.82         | 48.56         | 46.67         | 45.02         | 43.57         |  |
| 10.0                            | 3.00 | 66.14       | 57.98        | 54.52        | 51.74         | 49.45         | 47.52         | 45.84         | 44.37         |  |
| 10.1                            | 3.03 | 67.30       | 59.01        | 55.49        | 52.67         | 50.34         | 48.38         | 46.67         | 45.18         |  |
| 10.2                            | 3.06 | 68.48       | 60.05        | 56.47        | 53.61         | 51.24         | 49.25         | 47.51         | 45.99         |  |
| 10.3                            | 3.09 | 69.66       | 61.10        | 57.46        | 54.55         | 52.15         | 50.12         | 48.36         | 46.81         |  |
| 10.4                            | 3.12 | 70.85       | 62.15        | 58.46        | 55.51         | 53.06         | 51.01         | 49.21         | 47.64         |  |
| 10.5                            | 3.15 | 72.05       | 63.22        | 59.47        | 56.47         | 53.98         | 51.89         | 50.07         | 48.48         |  |
| 10.6                            | 3.18 | 73.26       | 64.29        | 60.48        | 57.43         | 54.91         | 52.79         | 50.94         | 49.32         |  |
| 10.7                            | 3.21 | 74.47       | 65.37        | 61.50        | 58.41         | 55.84         | 53.69         | 51.82         | 50.17         |  |
| 10.8                            | 3.24 | 75.70       | 66.46        | 62.53        | 59.39         | 56.79         | 54.60         | 52.70         | 51.02         |  |
| 10.9                            | 3.27 | 76.93       | 67.55        | 63.57        | 60.38         | 57.74         | 55.52         | 53.58         | 51.89         |  |
| 11.0                            | 3.30 | 78.18       | 68.66        | 64.61        | 61.37         | 58.69         | 56.44         | 54.48         | 52.75         |  |
| 11.1                            | 3.33 | 79.43       | 69.77        | 65.67        | 62.38         | 59.66         | 57.37         | 55.38         | 53.63         |  |
| 11.2                            | 3.36 | 80.69       | 70.89        | 66.73        | 63.39         | 60.63         | 58.31         | 56.29         | 54.51         |  |
| 11.3                            | 3.39 | 81.96       | 72.02        | 67.79        | 64.41         | 61.61         | 59.25         | 57.20         | 55.40         |  |
| 11.4                            | 3.42 | 83.24       | 73.16        | 68.87        | 65.43         | 62.59         | 60.21         | 58.12         | 56.30         |  |
| 11.5                            | 3.45 | 84.53       | 74.30        | 69.95        | 66.47         | 63.59         | 61.16         | 59.05         | 57.20         |  |
| 11.6                            | 3.48 | 85.83       | 75.45        | 71.04        | 67.51         | 64.59         | 62.13         | 59.99         | 58.11         |  |
| 11.7                            | 3.51 | 87.13       | 76.61        | 72.14        | 68.56         | 65.59         | 63.10         | 60.93         | 59.02         |  |
| 11.8                            | 3.54 | 88.45       | 77.78        | 73.25        | 69.61         | 66.61         | 64.08         | 61.88         | 59.94         |  |
| 11.9                            | 3.57 | 89.77       | 78.96        | 74.36        | 70.68         | 67.63         | 65.07         | 62.83         | 60.87         |  |
| 12.0                            | 3.60 | 91.10       | 80.14        | 75.48        | 71.75         | 68.66         | 66.06         | 63.79         | 61.81         |  |

# Uponor PEX friction loss tables

## ½" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |      |             |              |              |               |               |               |               |               |  |
|---------------------------------|------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|--|
| Velocity (ft/s)                 | gpm  | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |  |
| 1.5                             | 0.83 | 1.70        | 1.44         | 1.33         | 1.25          | 1.18          | 1.12          | 1.07          | 1.03          |  |
| 1.6                             | 0.88 | 1.89        | 1.61         | 1.49         | 1.40          | 1.32          | 1.26          | 1.20          | 1.15          |  |
| 1.7                             | 0.94 | 2.10        | 1.79         | 1.66         | 1.55          | 1.47          | 1.40          | 1.34          | 1.28          |  |
| 1.8                             | 0.99 | 2.31        | 1.97         | 1.83         | 1.71          | 1.62          | 1.54          | 1.48          | 1.42          |  |
| 1.9                             | 1.05 | 2.54        | 2.16         | 2.01         | 1.88          | 1.78          | 1.70          | 1.62          | 1.56          |  |
| 2.0                             | 1.10 | 2.77        | 2.36         | 2.19         | 2.06          | 1.95          | 1.86          | 1.78          | 1.71          |  |
| 2.1                             | 1.16 | 3.01        | 2.57         | 2.39         | 2.24          | 2.12          | 2.02          | 1.94          | 1.86          |  |
| 2.2                             | 1.22 | 3.26        | 2.78         | 2.59         | 2.43          | 2.30          | 2.19          | 2.10          | 2.02          |  |
| 2.3                             | 1.27 | 3.51        | 3.01         | 2.80         | 2.63          | 2.49          | 2.37          | 2.27          | 2.19          |  |
| 2.4                             | 1.33 | 3.78        | 3.24         | 3.01         | 2.83          | 2.68          | 2.56          | 2.45          | 2.36          |  |
| 2.5                             | 1.38 | 4.05        | 3.47         | 3.23         | 3.04          | 2.88          | 2.75          | 2.63          | 2.53          |  |
| 2.6                             | 1.44 | 4.33        | 3.72         | 3.46         | 3.25          | 3.09          | 2.94          | 2.82          | 2.71          |  |
| 2.7                             | 1.49 | 4.62        | 3.97         | 3.70         | 3.48          | 3.30          | 3.15          | 3.02          | 2.90          |  |
| 2.8                             | 1.55 | 4.92        | 4.23         | 3.94         | 3.71          | 3.51          | 3.35          | 3.22          | 3.10          |  |
| 2.9                             | 1.60 | 5.23        | 4.49         | 4.19         | 3.94          | 3.74          | 3.57          | 3.42          | 3.29          |  |
| 3.0                             | 1.66 | 5.54        | 4.77         | 4.44         | 4.18          | 3.97          | 3.79          | 3.63          | 3.50          |  |
| 3.1                             | 1.71 | 5.86        | 5.05         | 4.70         | 4.43          | 4.20          | 4.02          | 3.85          | 3.71          |  |
| 3.2                             | 1.77 | 6.19        | 5.33         | 4.97         | 4.68          | 4.45          | 4.25          | 4.07          | 3.92          |  |
| 3.3                             | 1.82 | 6.53        | 5.63         | 5.25         | 4.94          | 4.69          | 4.48          | 4.30          | 4.14          |  |
| 3.4                             | 1.88 | 6.87        | 5.93         | 5.53         | 5.21          | 4.95          | 4.73          | 4.54          | 4.37          |  |
| 3.5                             | 1.93 | 7.22        | 6.23         | 5.82         | 5.48          | 5.21          | 4.98          | 4.78          | 4.60          |  |
| 3.6                             | 1.99 | 7.58        | 6.55         | 6.11         | 5.76          | 5.47          | 5.23          | 5.02          | 4.84          |  |
| 3.7                             | 2.04 | 7.95        | 6.87         | 6.41         | 6.04          | 5.74          | 5.49          | 5.27          | 5.08          |  |
| 3.8                             | 2.10 | 8.32        | 7.19         | 6.72         | 6.34          | 6.02          | 5.76          | 5.53          | 5.33          |  |
| 3.9                             | 2.15 | 8.71        | 7.53         | 7.03         | 6.63          | 6.30          | 6.03          | 5.79          | 5.58          |  |
| 4.0                             | 2.21 | 9.10        | 7.87         | 7.35         | 6.93          | 6.59          | 6.30          | 6.05          | 5.84          |  |
| 4.1                             | 2.26 | 9.49        | 8.22         | 7.68         | 7.24          | 6.89          | 6.59          | 6.33          | 6.10          |  |
| 4.2                             | 2.32 | 9.90        | 8.57         | 8.01         | 7.56          | 7.19          | 6.88          | 6.60          | 6.37          |  |
| 4.3                             | 2.38 | 10.31       | 8.93         | 8.35         | 7.88          | 7.49          | 7.17          | 6.89          | 6.64          |  |
| 4.4                             | 2.43 | 10.73       | 9.30         | 8.69         | 8.20          | 7.80          | 7.47          | 7.17          | 6.92          |  |
| 4.5                             | 2.49 | 11.15       | 9.67         | 9.04         | 8.54          | 8.12          | 7.77          | 7.47          | 7.20          |  |
| 4.6                             | 2.54 | 11.59       | 10.05        | 9.40         | 8.88          | 8.44          | 8.08          | 7.77          | 7.49          |  |
| 4.7                             | 2.60 | 12.03       | 10.44        | 9.76         | 9.22          | 8.77          | 8.40          | 8.07          | 7.78          |  |
| 4.8                             | 2.65 | 12.48       | 10.83        | 10.13        | 9.57          | 9.11          | 8.72          | 8.38          | 8.08          |  |
| 4.9                             | 2.71 | 12.93       | 11.23        | 10.50        | 9.92          | 9.45          | 9.04          | 8.69          | 8.39          |  |
| 5.0                             | 2.76 | 13.39       | 11.63        | 10.88        | 10.29         | 9.79          | 9.37          | 9.01          | 8.69          |  |
| 5.1                             | 2.82 | 13.86       | 12.04        | 11.27        | 10.65         | 10.14         | 9.71          | 9.34          | 9.01          |  |
| 5.2                             | 2.87 | 14.34       | 12.46        | 11.66        | 11.02         | 10.50         | 10.05         | 9.67          | 9.33          |  |
| 5.3                             | 2.93 | 14.82       | 12.88        | 12.06        | 11.40         | 10.86         | 10.40         | 10.00         | 9.65          |  |
| 5.4                             | 2.98 | 15.31       | 13.31        | 12.47        | 11.79         | 11.23         | 10.75         | 10.34         | 9.98          |  |
| 5.5                             | 3.04 | 15.80       | 13.75        | 12.88        | 12.18         | 11.60         | 11.11         | 10.69         | 10.31         |  |
| 5.6                             | 3.09 | 16.31       | 14.19        | 13.29        | 12.57         | 11.98         | 11.47         | 11.04         | 10.65         |  |
| 5.7                             | 3.15 | 16.82       | 14.64        | 13.72        | 12.97         | 12.36         | 11.84         | 11.39         | 11.00         |  |
| 5.8                             | 3.20 | 17.34       | 15.10        | 14.14        | 13.38         | 12.75         | 12.22         | 11.75         | 11.34         |  |
| 5.9                             | 3.26 | 17.86       | 15.56        | 14.58        | 13.79         | 13.14         | 12.59         | 12.12         | 11.70         |  |
| 6.0                             | 3.31 | 18.39       | 16.02        | 15.02        | 14.21         | 13.54         | 12.98         | 12.49         | 12.06         |  |
| 6.1                             | 3.37 | 18.93       | 16.50        | 15.46        | 14.63         | 13.95         | 13.37         | 12.86         | 12.42         |  |
| 6.2                             | 3.42 | 19.47       | 16.98        | 15.91        | 15.06         | 14.36         | 13.76         | 13.24         | 12.79         |  |
| 6.3                             | 3.48 | 20.02       | 17.46        | 16.37        | 15.50         | 14.77         | 14.16         | 13.63         | 13.16         |  |
| 6.4                             | 3.54 | 20.58       | 17.95        | 16.83        | 15.94         | 15.19         | 14.56         | 14.02         | 13.54         |  |
| 6.5                             | 3.59 | 21.14       | 18.45        | 17.30        | 16.38         | 15.62         | 14.97         | 14.41         | 13.92         |  |
| 6.6                             | 3.65 | 21.72       | 18.95        | 17.78        | 16.83         | 16.05         | 15.39         | 14.81         | 14.31         |  |
| 6.7                             | 3.70 | 22.29       | 19.46        | 18.26        | 17.29         | 16.49         | 15.81         | 15.22         | 14.70         |  |

## ½" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |      |             |              |              |               |               |               |               |               |  |
|---------------------------------|------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|--|
| Velocity (ft/s)                 | gpm  | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |  |
| 6.8                             | 3.76 | 22.88       | 19.98        | 18.74        | 17.75         | 16.93         | 16.23         | 15.63         | 15.10         |  |
| 6.9                             | 3.81 | 23.47       | 20.50        | 19.23        | 18.22         | 17.37         | 16.66         | 16.04         | 15.50         |  |
| 7.0                             | 3.87 | 24.07       | 21.03        | 19.73        | 18.69         | 17.83         | 17.10         | 16.46         | 15.91         |  |
| 7.1                             | 3.92 | 24.67       | 21.56        | 20.23        | 19.17         | 18.28         | 17.54         | 16.89         | 16.32         |  |
| 7.2                             | 3.98 | 25.28       | 22.10        | 20.74        | 19.65         | 18.75         | 17.98         | 17.32         | 16.73         |  |
| 7.3                             | 4.03 | 25.90       | 22.64        | 21.25        | 20.14         | 19.21         | 18.43         | 17.75         | 17.16         |  |
| 7.4                             | 4.09 | 26.52       | 23.19        | 21.77        | 20.63         | 19.69         | 18.89         | 18.19         | 17.58         |  |
| 7.5                             | 4.14 | 27.15       | 23.75        | 22.30        | 21.13         | 20.17         | 19.35         | 18.64         | 18.01         |  |
| 7.6                             | 4.20 | 27.79       | 24.31        | 22.83        | 21.64         | 20.65         | 19.82         | 19.09         | 18.45         |  |
| 7.7                             | 4.25 | 28.43       | 24.88        | 23.37        | 22.15         | 21.14         | 20.29         | 19.54         | 18.89         |  |
| 7.8                             | 4.31 | 29.08       | 25.46        | 23.91        | 22.66         | 21.63         | 20.76         | 20.00         | 19.33         |  |
| 7.9                             | 4.36 | 29.74       | 26.04        | 24.46        | 23.18         | 22.13         | 21.24         | 20.47         | 19.78         |  |
| 8.0                             | 4.42 | 30.40       | 26.62        | 25.01        | 23.71         | 22.63         | 21.73         | 20.93         | 20.24         |  |
| 8.1                             | 4.47 | 31.07       | 27.21        | 25.57        | 24.24         | 23.14         | 22.22         | 21.41         | 20.70         |  |
| 8.2                             | 4.53 | 31.75       | 27.81        | 26.13        | 24.78         | 23.66         | 22.71         | 21.89         | 21.16         |  |
| 8.3                             | 4.58 | 32.43       | 28.41        | 26.70        | 25.32         | 24.18         | 23.21         | 22.37         | 21.63         |  |
| 8.4                             | 4.64 | 33.12       | 29.02        | 27.27        | 25.87         | 24.70         | 23.72         | 22.86         | 22.10         |  |
| 8.5                             | 4.70 | 33.81       | 29.64        | 27.85        | 26.42         | 25.23         | 24.23         | 23.35         | 22.58         |  |
| 8.6                             | 4.75 | 34.51       | 30.26        | 28.44        | 26.98         | 25.76         | 24.74         | 23.85         | 23.06         |  |
| 8.7                             | 4.81 | 35.22       | 30.88        | 29.03        | 27.54         | 26.30         | 25.26         | 24.35         | 23.55         |  |
| 8.8                             | 4.86 | 35.93       | 31.52        | 29.63        | 28.11         | 26.85         | 25.79         | 24.86         | 24.04         |  |
| 8.9                             | 4.92 | 36.65       | 32.15        | 30.23        | 28.68         | 27.40         | 26.32         | 25.37         | 24.54         |  |
| 9.0                             | 4.97 | 37.38       | 32.80        | 30.84        | 29.26         | 27.95         | 26.85         | 25.89         | 25.04         |  |
| 9.1                             | 5.03 | 38.11       | 33.45        | 31.45        | 29.85         | 28.51         | 27.39         | 26.41         | 25.54         |  |
| 9.2                             | 5.08 | 38.85       | 34.10        | 32.07        | 30.44         | 29.08         | 27.93         | 26.93         | 26.05         |  |
| 9.3                             | 5.14 | 39.59       | 34.76        | 32.69        | 31.03         | 29.65         | 28.48         | 27.46         | 26.57         |  |
| 9.4                             | 5.19 | 40.34       | 35.43        | 33.32        | 31.63         | 30.22         | 29.04         | 28.00         | 27.09         |  |
| 9.5                             | 5.25 | 41.10       | 36.10        | 33.96        | 32.23         | 30.80         | 29.60         | 28.54         | 27.61         |  |
| 9.6                             | 5.30 | 41.86       | 36.77        | 34.60        | 32.84         | 31.39         | 30.16         | 29.08         | 28.14         |  |
| 9.7                             | 5.36 | 42.63       | 37.46        | 35.24        | 33.46         | 31.98         | 30.73         | 29.63         | 28.67         |  |
| 9.8                             | 5.41 | 43.41       | 38.14        | 35.89        | 34.08         | 32.57         | 31.30         | 30.19         | 29.21         |  |
| 9.9                             | 5.47 | 44.19       | 38.84        | 36.55        | 34.70         | 33.17         | 31.88         | 30.75         | 29.75         |  |
| 10.0                            | 5.52 | 44.98       | 39.54        | 37.21        | 35.33         | 33.78         | 32.46         | 31.31         | 30.30         |  |
| 10.1                            | 5.58 | 45.77       | 40.24        | 37.88        | 35.97         | 34.39         | 33.05         | 31.88         | 30.85         |  |
| 10.2                            | 5.63 | 46.57       | 40.95        | 38.55        | 36.61         | 35.00         | 33.64         | 32.45         | 31.41         |  |
| 10.3                            | 5.69 | 47.38       | 41.67        | 39.22        | 37.26         | 35.62         | 34.24         | 33.03         | 31.97         |  |
| 10.4                            | 5.74 | 48.19       | 42.39        | 39.91        | 37.91         | 36.24         | 34.84         | 33.61         | 32.53         |  |
| 10.5                            | 5.80 | 49.01       | 43.12        | 40.59        | 38.56         | 36.87         | 35.45         | 34.20         | 33.10         |  |
| 10.6                            | 5.86 | 49.84       | 43.85        | 41.29        | 39.22         | 37.51         | 36.06         | 34.79         | 33.68         |  |
| 10.7                            | 5.91 | 50.67       | 44.59        | 41.99        | 39.89         | 38.15         | 36.68         | 35.39         | 34.26         |  |
| 10.8                            | 5.97 | 51.50       | 45.33        | 42.69        | 40.56         | 38.79         | 37.30         | 35.99         | 34.84         |  |
| 10.9                            | 6.02 | 52.35       | 46.08        | 43.40        | 41.24         | 39.44         | 37.92         | 36.60         | 35.43         |  |
| 11.0                            | 6.08 | 53.20       | 46.84        | 44.11        | 41.92         | 40.09         | 38.55         | 37.21         | 36.02         |  |
| 11.1                            | 6.13 | 54.05       | 47.60        | 44.83        | 42.60         | 40.75         | 39.19         | 37.82         | 36.62         |  |
| 11.2                            | 6.19 | 54.91       | 48.36        | 45.56        | 43.29         | 41.42         | 39.83         | 38.44         | 37.22         |  |
| 11.3                            | 6.24 | 55.78       | 49.13        | 46.29        | 43.99         | 42.08         | 40.47         | 39.07         | 37.82         |  |
| 11.4                            | 6.30 | 56.65       | 49.91        | 47.02        | 44.69         | 42.76         | 41.12         | 39.69         | 38.43         |  |
| 11.5                            | 6.35 | 57.53       | 50.69        | 47.76        | 45.40         | 43.44         | 41.78         | 40.33         | 39.05         |  |
| 11.6                            | 6.41 | 58.42       | 51.48        | 48.51        | 46.11         | 44.12         | 42.44         | 40.97         | 39.67         |  |
| 11.7                            | 6.46 | 59.31       | 52.27        | 49.26        | 46.83         | 44.81         | 43.10         | 41.61         | 40.29         |  |
| 11.8                            | 6.52 | 60.21       | 53.07        | 50.01        | 47.55         | 45.50         | 43.77         | 42.25         | 40.92         |  |
| 11.9                            | 6.57 | 61.11       | 53.87        | 50.77        | 48.27         | 46.20         | 44.44         | 42.91         | 41.55         |  |
| 12.0                            | 6.63 | 62.02       | 54.68        | 51.54        | 49.01         | 46.90         | 45.12         | 43.56         | 42.19         |  |

# Uponor PEX friction loss tables

## 3/4" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |      |             |              |              |               |               |               |               |               |  |
|---------------------------------|------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|--|
| Velocity (ft/s)                 | gpm  | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |  |
| 1.5                             | 1.65 | 1.08        | 0.92         | 0.86         | 0.81          | 0.76          | 0.73          | 0.70          | 0.67          |  |
| 1.6                             | 1.76 | 1.21        | 1.03         | 0.96         | 0.90          | 0.85          | 0.81          | 0.78          | 0.75          |  |
| 1.7                             | 1.87 | 1.34        | 1.15         | 1.07         | 1.00          | 0.95          | 0.90          | 0.87          | 0.83          |  |
| 1.8                             | 1.98 | 1.48        | 1.27         | 1.18         | 1.11          | 1.05          | 1.00          | 0.96          | 0.92          |  |
| 1.9                             | 2.09 | 1.62        | 1.39         | 1.29         | 1.22          | 1.15          | 1.10          | 1.05          | 1.01          |  |
| 2.0                             | 2.20 | 1.77        | 1.52         | 1.41         | 1.33          | 1.26          | 1.20          | 1.15          | 1.11          |  |
| 2.1                             | 2.31 | 1.92        | 1.65         | 1.54         | 1.45          | 1.37          | 1.31          | 1.26          | 1.21          |  |
| 2.2                             | 2.43 | 2.08        | 1.79         | 1.67         | 1.57          | 1.49          | 1.42          | 1.37          | 1.31          |  |
| 2.3                             | 2.54 | 2.25        | 1.94         | 1.81         | 1.70          | 1.61          | 1.54          | 1.48          | 1.42          |  |
| 2.4                             | 2.65 | 2.42        | 2.09         | 1.94         | 1.83          | 1.74          | 1.66          | 1.59          | 1.53          |  |
| 2.5                             | 2.76 | 2.60        | 2.24         | 2.09         | 1.97          | 1.87          | 1.78          | 1.71          | 1.65          |  |
| 2.6                             | 2.87 | 2.78        | 2.40         | 2.24         | 2.11          | 2.00          | 1.91          | 1.83          | 1.77          |  |
| 2.7                             | 2.98 | 2.97        | 2.56         | 2.39         | 2.25          | 2.14          | 2.04          | 1.96          | 1.89          |  |
| 2.8                             | 3.09 | 3.16        | 2.73         | 2.55         | 2.40          | 2.28          | 2.18          | 2.09          | 2.02          |  |
| 2.9                             | 3.20 | 3.36        | 2.90         | 2.71         | 2.55          | 2.43          | 2.32          | 2.23          | 2.15          |  |
| 3.0                             | 3.31 | 3.56        | 3.08         | 2.88         | 2.71          | 2.58          | 2.46          | 2.37          | 2.28          |  |
| 3.1                             | 3.42 | 3.77        | 3.26         | 3.05         | 2.87          | 2.73          | 2.61          | 2.51          | 2.42          |  |
| 3.2                             | 3.53 | 3.98        | 3.45         | 3.22         | 3.04          | 2.89          | 2.76          | 2.65          | 2.56          |  |
| 3.3                             | 3.64 | 4.20        | 3.64         | 3.40         | 3.21          | 3.05          | 2.92          | 2.80          | 2.70          |  |
| 3.4                             | 3.75 | 4.42        | 3.83         | 3.58         | 3.38          | 3.22          | 3.08          | 2.95          | 2.85          |  |
| 3.5                             | 3.86 | 4.65        | 4.03         | 3.77         | 3.56          | 3.39          | 3.24          | 3.11          | 3.00          |  |
| 3.6                             | 3.97 | 4.88        | 4.24         | 3.96         | 3.74          | 3.56          | 3.40          | 3.27          | 3.15          |  |
| 3.7                             | 4.08 | 5.12        | 4.44         | 4.16         | 3.93          | 3.74          | 3.57          | 3.43          | 3.31          |  |
| 3.8                             | 4.19 | 5.36        | 4.66         | 4.36         | 4.12          | 3.92          | 3.75          | 3.60          | 3.47          |  |
| 3.9                             | 4.30 | 5.61        | 4.87         | 4.56         | 4.31          | 4.10          | 3.93          | 3.77          | 3.64          |  |
| 4.0                             | 4.41 | 5.86        | 5.10         | 4.77         | 4.51          | 4.29          | 4.11          | 3.95          | 3.81          |  |
| 4.1                             | 4.52 | 6.12        | 5.32         | 4.98         | 4.71          | 4.48          | 4.29          | 4.12          | 3.98          |  |
| 4.2                             | 4.63 | 6.38        | 5.55         | 5.20         | 4.91          | 4.68          | 4.48          | 4.31          | 4.15          |  |
| 4.3                             | 4.74 | 6.65        | 5.79         | 5.42         | 5.12          | 4.88          | 4.67          | 4.49          | 4.33          |  |
| 4.4                             | 4.85 | 6.92        | 6.02         | 5.64         | 5.34          | 5.08          | 4.87          | 4.68          | 4.51          |  |
| 4.5                             | 4.96 | 7.20        | 6.27         | 5.87         | 5.55          | 5.29          | 5.06          | 4.87          | 4.70          |  |
| 4.6                             | 5.07 | 7.48        | 6.51         | 6.10         | 5.77          | 5.50          | 5.27          | 5.07          | 4.89          |  |
| 4.7                             | 5.18 | 7.76        | 6.77         | 6.34         | 6.00          | 5.71          | 5.47          | 5.26          | 5.08          |  |
| 4.8                             | 5.29 | 8.05        | 7.02         | 6.58         | 6.23          | 5.93          | 5.68          | 5.47          | 5.27          |  |
| 4.9                             | 5.40 | 8.35        | 7.28         | 6.82         | 6.46          | 6.15          | 5.90          | 5.67          | 5.47          |  |
| 5.0                             | 5.51 | 8.65        | 7.54         | 7.07         | 6.69          | 6.38          | 6.11          | 5.88          | 5.68          |  |
| 5.1                             | 5.62 | 8.95        | 7.81         | 7.33         | 6.93          | 6.61          | 6.33          | 6.09          | 5.88          |  |
| 5.2                             | 5.73 | 9.26        | 8.08         | 7.58         | 7.18          | 6.84          | 6.56          | 6.31          | 6.09          |  |
| 5.3                             | 5.84 | 9.57        | 8.36         | 7.84         | 7.42          | 7.08          | 6.78          | 6.53          | 6.30          |  |
| 5.4                             | 5.95 | 9.89        | 8.64         | 8.11         | 7.67          | 7.32          | 7.01          | 6.75          | 6.52          |  |
| 5.5                             | 6.06 | 10.21       | 8.93         | 8.37         | 7.93          | 7.56          | 7.25          | 6.97          | 6.73          |  |
| 5.6                             | 6.17 | 10.54       | 9.21         | 8.65         | 8.19          | 7.81          | 7.48          | 7.20          | 6.96          |  |
| 5.7                             | 6.28 | 10.87       | 9.51         | 8.92         | 8.45          | 8.06          | 7.73          | 7.44          | 7.18          |  |
| 5.8                             | 6.39 | 11.21       | 9.80         | 9.20         | 8.71          | 8.31          | 7.97          | 7.67          | 7.41          |  |
| 5.9                             | 6.50 | 11.55       | 10.10        | 9.48         | 8.98          | 8.57          | 8.22          | 7.91          | 7.64          |  |
| 6.0                             | 6.61 | 11.89       | 10.41        | 9.77         | 9.26          | 8.83          | 8.47          | 8.15          | 7.87          |  |
| 6.1                             | 6.72 | 12.24       | 10.72        | 10.06        | 9.53          | 9.09          | 8.72          | 8.40          | 8.11          |  |
| 6.2                             | 6.83 | 12.60       | 11.03        | 10.36        | 9.81          | 9.36          | 8.98          | 8.65          | 8.35          |  |
| 6.3                             | 6.94 | 12.96       | 11.35        | 10.65        | 10.10         | 9.63          | 9.24          | 8.90          | 8.60          |  |
| 6.4                             | 7.05 | 13.32       | 11.67        | 10.96        | 10.38         | 9.91          | 9.51          | 9.15          | 8.84          |  |
| 6.5                             | 7.17 | 13.68       | 11.99        | 11.26        | 10.68         | 10.19         | 9.77          | 9.41          | 9.09          |  |
| 6.6                             | 7.28 | 14.06       | 12.32        | 11.57        | 10.97         | 10.47         | 10.05         | 9.67          | 9.35          |  |
| 6.7                             | 7.39 | 14.43       | 12.65        | 11.89        | 11.27         | 10.75         | 10.32         | 9.94          | 9.60          |  |

## 3/4" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |       |             |              |              |               |               |               |               |               |
|---------------------------------|-------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|
| Velocity (ft/s)                 | gpm   | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |
| 6.8                             | 7.50  | 14.81       | 12.99        | 12.20        | 11.57         | 11.04         | 10.60         | 10.21         | 9.86          |
| 6.9                             | 7.61  | 15.20       | 13.33        | 12.52        | 11.88         | 11.34         | 10.88         | 10.48         | 10.13         |
| 7.0                             | 7.72  | 15.59       | 13.67        | 12.85        | 12.18         | 11.63         | 11.16         | 10.75         | 10.39         |
| 7.1                             | 7.83  | 15.98       | 14.02        | 13.18        | 12.50         | 11.93         | 11.45         | 11.03         | 10.66         |
| 7.2                             | 7.94  | 16.38       | 14.37        | 13.51        | 12.81         | 12.23         | 11.74         | 11.31         | 10.93         |
| 7.3                             | 8.05  | 16.78       | 14.73        | 13.84        | 13.13         | 12.54         | 12.04         | 11.60         | 11.21         |
| 7.4                             | 8.16  | 17.18       | 15.09        | 14.18        | 13.46         | 12.85         | 12.34         | 11.89         | 11.49         |
| 7.5                             | 8.27  | 17.59       | 15.45        | 14.53        | 13.78         | 13.16         | 12.64         | 12.18         | 11.77         |
| 7.6                             | 8.38  | 18.01       | 15.82        | 14.87        | 14.11         | 13.48         | 12.94         | 12.47         | 12.06         |
| 7.7                             | 8.49  | 18.43       | 16.19        | 15.22        | 14.45         | 13.80         | 13.25         | 12.77         | 12.34         |
| 7.8                             | 8.60  | 18.85       | 16.56        | 15.58        | 14.78         | 14.12         | 13.56         | 13.07         | 12.63         |
| 7.9                             | 8.71  | 19.28       | 16.94        | 15.94        | 15.12         | 14.45         | 13.87         | 13.37         | 12.93         |
| 8.0                             | 8.82  | 19.71       | 17.32        | 16.30        | 15.47         | 14.78         | 14.19         | 13.68         | 13.23         |
| 8.1                             | 8.93  | 20.14       | 17.71        | 16.66        | 15.81         | 15.11         | 14.51         | 13.99         | 13.53         |
| 8.2                             | 9.04  | 20.58       | 18.10        | 17.03        | 16.17         | 15.45         | 14.84         | 14.30         | 13.83         |
| 8.3                             | 9.15  | 21.03       | 18.49        | 17.40        | 16.52         | 15.78         | 15.16         | 14.62         | 14.13         |
| 8.4                             | 9.26  | 21.48       | 18.89        | 17.78        | 16.88         | 16.13         | 15.49         | 14.94         | 14.44         |
| 8.5                             | 9.37  | 21.93       | 19.29        | 18.16        | 17.24         | 16.47         | 15.83         | 15.26         | 14.76         |
| 8.6                             | 9.48  | 22.38       | 19.70        | 18.54        | 17.60         | 16.82         | 16.16         | 15.58         | 15.07         |
| 8.7                             | 9.59  | 22.85       | 20.11        | 18.93        | 17.97         | 17.18         | 16.50         | 15.91         | 15.39         |
| 8.8                             | 9.70  | 23.31       | 20.52        | 19.32        | 18.34         | 17.53         | 16.85         | 16.24         | 15.71         |
| 8.9                             | 9.81  | 23.78       | 20.94        | 19.71        | 18.72         | 17.89         | 17.19         | 16.58         | 16.04         |
| 9.0                             | 9.92  | 24.25       | 21.36        | 20.11        | 19.10         | 18.26         | 17.54         | 16.92         | 16.36         |
| 9.1                             | 10.03 | 24.73       | 21.78        | 20.51        | 19.48         | 18.62         | 17.89         | 17.26         | 16.69         |
| 9.2                             | 10.14 | 25.21       | 22.21        | 20.91        | 19.86         | 18.99         | 18.25         | 17.60         | 17.03         |
| 9.3                             | 10.25 | 25.70       | 22.64        | 21.32        | 20.25         | 19.36         | 18.61         | 17.95         | 17.36         |
| 9.4                             | 10.36 | 26.18       | 23.07        | 21.73        | 20.65         | 19.74         | 18.97         | 18.30         | 17.70         |
| 9.5                             | 10.47 | 26.68       | 23.51        | 22.15        | 21.04         | 20.12         | 19.34         | 18.65         | 18.05         |
| 9.6                             | 10.58 | 27.18       | 23.95        | 22.56        | 21.44         | 20.50         | 19.71         | 19.01         | 18.39         |
| 9.7                             | 10.69 | 27.68       | 24.40        | 22.99        | 21.84         | 20.89         | 20.08         | 19.37         | 18.74         |
| 9.8                             | 10.80 | 28.18       | 24.85        | 23.41        | 22.25         | 21.28         | 20.45         | 19.73         | 19.09         |
| 9.9                             | 10.91 | 28.69       | 25.30        | 23.84        | 22.66         | 21.67         | 20.83         | 20.10         | 19.45         |
| 10.0                            | 11.02 | 29.21       | 25.76        | 24.27        | 23.07         | 22.06         | 21.21         | 20.46         | 19.80         |
| 10.1                            | 11.13 | 29.72       | 26.22        | 24.71        | 23.48         | 22.46         | 21.60         | 20.84         | 20.17         |
| 10.2                            | 11.24 | 30.25       | 26.68        | 25.15        | 23.90         | 22.86         | 21.98         | 21.21         | 20.53         |
| 10.3                            | 11.35 | 30.77       | 27.15        | 25.59        | 24.33         | 23.27         | 22.37         | 21.59         | 20.89         |
| 10.4                            | 11.46 | 31.30       | 27.62        | 26.04        | 24.75         | 23.68         | 22.77         | 21.97         | 21.26         |
| 10.5                            | 11.57 | 31.84       | 28.10        | 26.49        | 25.18         | 24.09         | 23.17         | 22.35         | 21.64         |
| 10.6                            | 11.68 | 32.37       | 28.58        | 26.94        | 25.61         | 24.50         | 23.57         | 22.74         | 22.01         |
| 10.7                            | 11.79 | 32.92       | 29.06        | 27.40        | 26.05         | 24.92         | 23.97         | 23.13         | 22.39         |
| 10.8                            | 11.91 | 33.46       | 29.55        | 27.86        | 26.49         | 25.34         | 24.37         | 23.52         | 22.77         |
| 10.9                            | 12.02 | 34.01       | 30.04        | 28.32        | 26.93         | 25.77         | 24.78         | 23.92         | 23.16         |
| 11.0                            | 12.13 | 34.57       | 30.53        | 28.79        | 27.37         | 26.20         | 25.20         | 24.32         | 23.54         |
| 11.1                            | 12.24 | 35.12       | 31.03        | 29.26        | 27.82         | 26.63         | 25.61         | 24.72         | 23.93         |
| 11.2                            | 12.35 | 35.68       | 31.53        | 29.73        | 28.28         | 27.06         | 26.03         | 25.13         | 24.33         |
| 11.3                            | 12.46 | 36.25       | 32.03        | 30.21        | 28.73         | 27.50         | 26.45         | 25.53         | 24.72         |
| 11.4                            | 12.57 | 36.82       | 32.54        | 30.69        | 29.19         | 27.94         | 26.88         | 25.94         | 25.12         |
| 11.5                            | 12.68 | 37.39       | 33.05        | 31.17        | 29.65         | 28.38         | 27.30         | 26.36         | 25.52         |
| 11.6                            | 12.79 | 37.97       | 33.56        | 31.66        | 30.12         | 28.83         | 27.74         | 26.78         | 25.93         |
| 11.7                            | 12.90 | 38.55       | 34.08        | 32.15        | 30.59         | 29.28         | 28.17         | 27.20         | 26.33         |
| 11.8                            | 13.01 | 39.14       | 34.60        | 32.64        | 31.06         | 29.73         | 28.61         | 27.62         | 26.75         |
| 11.9                            | 13.12 | 39.73       | 35.13        | 33.14        | 31.53         | 30.19         | 29.05         | 28.04         | 27.16         |
| 12.0                            | 13.23 | 40.32       | 35.66        | 33.64        | 32.01         | 30.65         | 29.49         | 28.47         | 27.58         |

# Uponor PEX friction loss tables

## 1" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |       |             |              |              |               |               |               |               |               |  |
|---------------------------------|-------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|--|
| Velocity (ft/s)                 | gpm   | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |  |
| 1.5                             | 2.73  | 0.78        | 0.67         | 0.62         | 0.59          | 0.56          | 0.53          | 0.51          | 0.49          |  |
| 1.6                             | 2.91  | 0.87        | 0.75         | 0.70         | 0.66          | 0.62          | 0.59          | 0.57          | 0.55          |  |
| 1.7                             | 3.09  | 0.97        | 0.83         | 0.78         | 0.73          | 0.69          | 0.66          | 0.63          | 0.61          |  |
| 1.8                             | 3.27  | 1.07        | 0.92         | 0.86         | 0.81          | 0.77          | 0.73          | 0.70          | 0.68          |  |
| 1.9                             | 3.46  | 1.17        | 1.01         | 0.94         | 0.89          | 0.84          | 0.81          | 0.77          | 0.74          |  |
| 2.0                             | 3.64  | 1.28        | 1.11         | 1.03         | 0.97          | 0.92          | 0.88          | 0.85          | 0.81          |  |
| 2.1                             | 3.82  | 1.40        | 1.21         | 1.12         | 1.06          | 1.01          | 0.96          | 0.92          | 0.89          |  |
| 2.2                             | 4.00  | 1.51        | 1.31         | 1.22         | 1.15          | 1.09          | 1.04          | 1.00          | 0.96          |  |
| 2.3                             | 4.18  | 1.63        | 1.41         | 1.32         | 1.24          | 1.18          | 1.13          | 1.08          | 1.04          |  |
| 2.4                             | 4.37  | 1.76        | 1.52         | 1.42         | 1.34          | 1.27          | 1.22          | 1.17          | 1.13          |  |
| 2.5                             | 4.55  | 1.89        | 1.63         | 1.53         | 1.44          | 1.37          | 1.31          | 1.26          | 1.21          |  |
| 2.6                             | 4.73  | 2.02        | 1.75         | 1.64         | 1.54          | 1.47          | 1.40          | 1.35          | 1.30          |  |
| 2.7                             | 4.91  | 2.16        | 1.87         | 1.75         | 1.65          | 1.57          | 1.50          | 1.44          | 1.39          |  |
| 2.8                             | 5.09  | 2.30        | 1.99         | 1.86         | 1.76          | 1.67          | 1.60          | 1.54          | 1.48          |  |
| 2.9                             | 5.28  | 2.44        | 2.12         | 1.98         | 1.87          | 1.78          | 1.70          | 1.63          | 1.58          |  |
| 3.0                             | 5.46  | 2.59        | 2.25         | 2.10         | 1.99          | 1.89          | 1.81          | 1.74          | 1.67          |  |
| 3.1                             | 5.64  | 2.74        | 2.38         | 2.23         | 2.10          | 2.00          | 1.92          | 1.84          | 1.77          |  |
| 3.2                             | 5.82  | 2.90        | 2.52         | 2.36         | 2.23          | 2.12          | 2.03          | 1.95          | 1.88          |  |
| 3.3                             | 6.00  | 3.06        | 2.66         | 2.49         | 2.35          | 2.24          | 2.14          | 2.06          | 1.98          |  |
| 3.4                             | 6.19  | 3.22        | 2.80         | 2.62         | 2.48          | 2.36          | 2.26          | 2.17          | 2.09          |  |
| 3.5                             | 6.37  | 3.39        | 2.95         | 2.76         | 2.61          | 2.48          | 2.38          | 2.29          | 2.20          |  |
| 3.6                             | 6.55  | 3.56        | 3.10         | 2.90         | 2.74          | 2.61          | 2.50          | 2.40          | 2.32          |  |
| 3.7                             | 6.73  | 3.73        | 3.25         | 3.04         | 2.88          | 2.74          | 2.63          | 2.52          | 2.43          |  |
| 3.8                             | 6.91  | 3.91        | 3.41         | 3.19         | 3.02          | 2.87          | 2.75          | 2.65          | 2.55          |  |
| 3.9                             | 7.09  | 4.09        | 3.56         | 3.34         | 3.16          | 3.01          | 2.88          | 2.77          | 2.68          |  |
| 4.0                             | 7.28  | 4.27        | 3.73         | 3.49         | 3.31          | 3.15          | 3.02          | 2.90          | 2.80          |  |
| 4.1                             | 7.46  | 4.46        | 3.89         | 3.65         | 3.45          | 3.29          | 3.15          | 3.03          | 2.93          |  |
| 4.2                             | 7.64  | 4.65        | 4.06         | 3.81         | 3.60          | 3.43          | 3.29          | 3.17          | 3.06          |  |
| 4.3                             | 7.82  | 4.85        | 4.23         | 3.97         | 3.76          | 3.58          | 3.43          | 3.30          | 3.19          |  |
| 4.4                             | 8.00  | 5.05        | 4.41         | 4.14         | 3.92          | 3.73          | 3.58          | 3.44          | 3.32          |  |
| 4.5                             | 8.19  | 5.25        | 4.59         | 4.30         | 4.07          | 3.88          | 3.72          | 3.58          | 3.46          |  |
| 4.6                             | 8.37  | 5.46        | 4.77         | 4.47         | 4.24          | 4.04          | 3.87          | 3.73          | 3.60          |  |
| 4.7                             | 8.55  | 5.66        | 4.95         | 4.65         | 4.40          | 4.20          | 4.02          | 3.87          | 3.74          |  |
| 4.8                             | 8.73  | 5.88        | 5.14         | 4.83         | 4.57          | 4.36          | 4.18          | 4.02          | 3.88          |  |
| 4.9                             | 8.91  | 6.09        | 5.33         | 5.01         | 4.74          | 4.52          | 4.34          | 4.17          | 4.03          |  |
| 5.0                             | 9.10  | 6.31        | 5.53         | 5.19         | 4.91          | 4.69          | 4.49          | 4.33          | 4.18          |  |
| 5.1                             | 9.28  | 6.54        | 5.72         | 5.37         | 5.09          | 4.86          | 4.66          | 4.48          | 4.33          |  |
| 5.2                             | 9.46  | 6.76        | 5.92         | 5.56         | 5.27          | 5.03          | 4.82          | 4.64          | 4.48          |  |
| 5.3                             | 9.64  | 6.99        | 6.13         | 5.75         | 5.45          | 5.20          | 4.99          | 4.80          | 4.64          |  |
| 5.4                             | 9.82  | 7.22        | 6.33         | 5.95         | 5.64          | 5.38          | 5.16          | 4.97          | 4.80          |  |
| 5.5                             | 10.01 | 7.46        | 6.54         | 6.14         | 5.82          | 5.56          | 5.33          | 5.13          | 4.96          |  |
| 5.6                             | 10.19 | 7.70        | 6.75         | 6.34         | 6.01          | 5.74          | 5.51          | 5.30          | 5.12          |  |
| 5.7                             | 10.37 | 7.94        | 6.97         | 6.55         | 6.21          | 5.92          | 5.68          | 5.47          | 5.29          |  |
| 5.8                             | 10.55 | 8.19        | 7.19         | 6.75         | 6.40          | 6.11          | 5.86          | 5.65          | 5.46          |  |
| 5.9                             | 10.73 | 8.44        | 7.41         | 6.96         | 6.60          | 6.30          | 6.05          | 5.82          | 5.63          |  |
| 6.0                             | 10.92 | 8.69        | 7.63         | 7.17         | 6.80          | 6.49          | 6.23          | 6.00          | 5.80          |  |
| 6.1                             | 11.10 | 8.95        | 7.86         | 7.39         | 7.01          | 6.69          | 6.42          | 6.18          | 5.97          |  |
| 6.2                             | 11.28 | 9.21        | 8.09         | 7.60         | 7.21          | 6.89          | 6.61          | 6.37          | 6.15          |  |
| 6.3                             | 11.46 | 9.47        | 8.32         | 7.82         | 7.42          | 7.09          | 6.80          | 6.55          | 6.33          |  |
| 6.4                             | 11.64 | 9.74        | 8.56         | 8.05         | 7.63          | 7.29          | 7.00          | 6.74          | 6.51          |  |
| 6.5                             | 11.82 | 10.01       | 8.79         | 8.27         | 7.85          | 7.49          | 7.19          | 6.93          | 6.70          |  |
| 6.6                             | 12.01 | 10.28       | 9.04         | 8.50         | 8.06          | 7.70          | 7.39          | 7.12          | 6.89          |  |
| 6.7                             | 12.19 | 10.56       | 9.28         | 8.73         | 8.28          | 7.91          | 7.60          | 7.32          | 7.07          |  |

## 1" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |       |             |              |              |               |               |               |               |               |  |
|---------------------------------|-------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|--|
| Velocity (ft/s)                 | gpm   | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |  |
| 6.8                             | 12.37 | 10.83       | 9.53         | 8.96         | 8.51          | 8.12          | 7.80          | 7.52          | 7.27          |  |
| 6.9                             | 12.55 | 11.12       | 9.78         | 9.20         | 8.73          | 8.34          | 8.01          | 7.72          | 7.46          |  |
| 7.0                             | 12.73 | 11.40       | 10.03        | 9.44         | 8.96          | 8.56          | 8.22          | 7.92          | 7.66          |  |
| 7.1                             | 12.92 | 11.69       | 10.29        | 9.68         | 9.19          | 8.78          | 8.43          | 8.12          | 7.85          |  |
| 7.2                             | 13.10 | 11.98       | 10.55        | 9.92         | 9.42          | 9.00          | 8.65          | 8.33          | 8.06          |  |
| 7.3                             | 13.28 | 12.28       | 10.81        | 10.17        | 9.66          | 9.23          | 8.86          | 8.54          | 8.26          |  |
| 7.4                             | 13.46 | 12.57       | 11.07        | 10.42        | 9.89          | 9.45          | 9.08          | 8.75          | 8.46          |  |
| 7.5                             | 13.64 | 12.88       | 11.34        | 10.67        | 10.14         | 9.69          | 9.30          | 8.97          | 8.67          |  |
| 7.6                             | 13.83 | 13.18       | 11.61        | 10.93        | 10.38         | 9.92          | 9.53          | 9.19          | 8.88          |  |
| 7.7                             | 14.01 | 13.49       | 11.88        | 11.19        | 10.62         | 10.15         | 9.76          | 9.40          | 9.09          |  |
| 7.8                             | 14.19 | 13.80       | 12.16        | 11.45        | 10.87         | 10.39         | 9.98          | 9.63          | 9.31          |  |
| 7.9                             | 14.37 | 14.11       | 12.44        | 11.71        | 11.12         | 10.63         | 10.22         | 9.85          | 9.53          |  |
| 8.0                             | 14.55 | 14.43       | 12.72        | 11.98        | 11.38         | 10.88         | 10.45         | 10.08         | 9.74          |  |
| 8.1                             | 14.74 | 14.75       | 13.00        | 12.25        | 11.63         | 11.12         | 10.69         | 10.30         | 9.97          |  |
| 8.2                             | 14.92 | 15.07       | 13.29        | 12.52        | 11.89         | 11.37         | 10.93         | 10.54         | 10.19         |  |
| 8.3                             | 15.10 | 15.40       | 13.58        | 12.79        | 12.15         | 11.62         | 11.17         | 10.77         | 10.42         |  |
| 8.4                             | 15.28 | 15.73       | 13.87        | 13.07        | 12.42         | 11.87         | 11.41         | 11.00         | 10.64         |  |
| 8.5                             | 15.46 | 16.06       | 14.17        | 13.35        | 12.68         | 12.13         | 11.66         | 11.24         | 10.87         |  |
| 8.6                             | 15.64 | 16.39       | 14.47        | 13.63        | 12.95         | 12.39         | 11.90         | 11.48         | 11.11         |  |
| 8.7                             | 15.83 | 16.73       | 14.77        | 13.91        | 13.22         | 12.65         | 12.16         | 11.72         | 11.34         |  |
| 8.8                             | 16.01 | 17.07       | 15.07        | 14.20        | 13.50         | 12.91         | 12.41         | 11.97         | 11.58         |  |
| 8.9                             | 16.19 | 17.42       | 15.38        | 14.49        | 13.77         | 13.17         | 12.66         | 12.22         | 11.82         |  |
| 9.0                             | 16.37 | 17.77       | 15.69        | 14.78        | 14.05         | 13.44         | 12.92         | 12.46         | 12.06         |  |
| 9.1                             | 16.55 | 18.12       | 16.00        | 15.08        | 14.33         | 13.71         | 13.18         | 12.72         | 12.30         |  |
| 9.2                             | 16.74 | 18.47       | 16.31        | 15.38        | 14.62         | 13.98         | 13.44         | 12.97         | 12.55         |  |
| 9.3                             | 16.92 | 18.83       | 16.63        | 15.68        | 14.91         | 14.26         | 13.71         | 13.23         | 12.80         |  |
| 9.4                             | 17.10 | 19.19       | 16.95        | 15.98        | 15.19         | 14.54         | 13.98         | 13.48         | 13.05         |  |
| 9.5                             | 17.28 | 19.55       | 17.27        | 16.29        | 15.49         | 14.82         | 14.25         | 13.74         | 13.30         |  |
| 9.6                             | 17.46 | 19.92       | 17.60        | 16.60        | 15.78         | 15.10         | 14.52         | 14.01         | 13.56         |  |
| 9.7                             | 17.65 | 20.28       | 17.93        | 16.91        | 16.08         | 15.38         | 14.79         | 14.27         | 13.81         |  |
| 9.8                             | 17.83 | 20.66       | 18.26        | 17.22        | 16.38         | 15.67         | 15.07         | 14.54         | 14.07         |  |
| 9.9                             | 18.01 | 21.03       | 18.59        | 17.54        | 16.68         | 15.96         | 15.35         | 14.81         | 14.33         |  |
| 10.0                            | 18.19 | 21.41       | 18.93        | 17.85        | 16.98         | 16.25         | 15.63         | 15.08         | 14.60         |  |
| 10.1                            | 18.37 | 21.79       | 19.27        | 18.18        | 17.29         | 16.54         | 15.91         | 15.36         | 14.86         |  |
| 10.2                            | 18.56 | 22.17       | 19.61        | 18.50        | 17.60         | 16.84         | 16.20         | 15.63         | 15.13         |  |
| 10.3                            | 18.74 | 22.56       | 19.96        | 18.83        | 17.91         | 17.14         | 16.49         | 15.91         | 15.40         |  |
| 10.4                            | 18.92 | 22.95       | 20.30        | 19.15        | 18.22         | 17.44         | 16.78         | 16.19         | 15.67         |  |
| 10.5                            | 19.10 | 23.34       | 20.65        | 19.49        | 18.54         | 17.74         | 17.07         | 16.47         | 15.95         |  |
| 10.6                            | 19.28 | 23.74       | 21.01        | 19.82        | 18.86         | 18.05         | 17.36         | 16.76         | 16.23         |  |
| 10.7                            | 19.47 | 24.14       | 21.36        | 20.16        | 19.18         | 18.36         | 17.66         | 17.05         | 16.50         |  |
| 10.8                            | 19.65 | 24.54       | 21.72        | 20.50        | 19.50         | 18.67         | 17.96         | 17.34         | 16.79         |  |
| 10.9                            | 19.83 | 24.94       | 22.08        | 20.84        | 19.83         | 18.98         | 18.26         | 17.63         | 17.07         |  |
| 11.0                            | 20.01 | 25.35       | 22.44        | 21.18        | 20.16         | 19.30         | 18.57         | 17.92         | 17.35         |  |
| 11.1                            | 20.19 | 25.76       | 22.81        | 21.53        | 20.49         | 19.61         | 18.87         | 18.22         | 17.64         |  |
| 11.2                            | 20.37 | 26.17       | 23.18        | 21.88        | 20.82         | 19.93         | 19.18         | 18.52         | 17.93         |  |
| 11.3                            | 20.56 | 26.59       | 23.55        | 22.23        | 21.16         | 20.26         | 19.49         | 18.82         | 18.22         |  |
| 11.4                            | 20.74 | 27.01       | 23.92        | 22.58        | 21.49         | 20.58         | 19.81         | 19.12         | 18.52         |  |
| 11.5                            | 20.92 | 27.43       | 24.30        | 22.94        | 21.84         | 20.91         | 20.12         | 19.43         | 18.81         |  |
| 11.6                            | 21.10 | 27.85       | 24.68        | 23.30        | 22.18         | 21.24         | 20.44         | 19.74         | 19.11         |  |
| 11.7                            | 21.28 | 28.28       | 25.06        | 23.66        | 22.52         | 21.57         | 20.76         | 20.05         | 19.41         |  |
| 11.8                            | 21.47 | 28.71       | 25.45        | 24.03        | 22.87         | 21.90         | 21.08         | 20.36         | 19.72         |  |
| 11.9                            | 21.65 | 29.14       | 25.83        | 24.39        | 23.22         | 22.24         | 21.41         | 20.67         | 20.02         |  |
| 12.0                            | 21.83 | 29.58       | 26.22        | 24.76        | 23.58         | 22.58         | 21.73         | 20.99         | 20.33         |  |

# Uponor PEX friction loss tables

## 1¼" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |       |             |              |              |               |               |               |               |               |  |
|---------------------------------|-------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|--|
| Velocity (ft/s)                 | gpm   | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |  |
| 1.5                             | 4.08  | 0.60        | 0.52         | 0.49         | 0.46          | 0.43          | 0.41          | 0.40          | 0.38          |  |
| 1.6                             | 4.35  | 0.68        | 0.58         | 0.54         | 0.51          | 0.49          | 0.46          | 0.44          | 0.43          |  |
| 1.7                             | 4.62  | 0.75        | 0.65         | 0.60         | 0.57          | 0.54          | 0.52          | 0.49          | 0.48          |  |
| 1.8                             | 4.90  | 0.83        | 0.72         | 0.67         | 0.63          | 0.60          | 0.57          | 0.55          | 0.53          |  |
| 1.9                             | 5.17  | 0.91        | 0.79         | 0.73         | 0.69          | 0.66          | 0.63          | 0.60          | 0.58          |  |
| 2.0                             | 5.44  | 0.99        | 0.86         | 0.80         | 0.76          | 0.72          | 0.69          | 0.66          | 0.64          |  |
| 2.1                             | 5.71  | 1.08        | 0.94         | 0.87         | 0.82          | 0.78          | 0.75          | 0.72          | 0.69          |  |
| 2.2                             | 5.98  | 1.17        | 1.02         | 0.95         | 0.90          | 0.85          | 0.81          | 0.78          | 0.75          |  |
| 2.3                             | 6.26  | 1.27        | 1.10         | 1.03         | 0.97          | 0.92          | 0.88          | 0.85          | 0.81          |  |
| 2.4                             | 6.53  | 1.36        | 1.18         | 1.11         | 1.04          | 0.99          | 0.95          | 0.91          | 0.88          |  |
| 2.5                             | 6.80  | 1.46        | 1.27         | 1.19         | 1.12          | 1.07          | 1.02          | 0.98          | 0.95          |  |
| 2.6                             | 7.07  | 1.57        | 1.36         | 1.27         | 1.20          | 1.14          | 1.09          | 1.05          | 1.01          |  |
| 2.7                             | 7.34  | 1.67        | 1.45         | 1.36         | 1.29          | 1.22          | 1.17          | 1.12          | 1.08          |  |
| 2.8                             | 7.62  | 1.78        | 1.55         | 1.45         | 1.37          | 1.30          | 1.25          | 1.20          | 1.16          |  |
| 2.9                             | 7.89  | 1.89        | 1.65         | 1.54         | 1.46          | 1.39          | 1.33          | 1.28          | 1.23          |  |
| 3.0                             | 8.16  | 2.01        | 1.75         | 1.64         | 1.55          | 1.47          | 1.41          | 1.36          | 1.31          |  |
| 3.1                             | 8.43  | 2.13        | 1.85         | 1.74         | 1.64          | 1.56          | 1.50          | 1.44          | 1.39          |  |
| 3.2                             | 8.70  | 2.25        | 1.96         | 1.84         | 1.74          | 1.65          | 1.58          | 1.52          | 1.47          |  |
| 3.3                             | 8.98  | 2.37        | 2.07         | 1.94         | 1.83          | 1.75          | 1.67          | 1.61          | 1.55          |  |
| 3.4                             | 9.25  | 2.50        | 2.18         | 2.04         | 1.93          | 1.84          | 1.76          | 1.70          | 1.64          |  |
| 3.5                             | 9.52  | 2.63        | 2.29         | 2.15         | 2.04          | 1.94          | 1.86          | 1.79          | 1.72          |  |
| 3.6                             | 9.79  | 2.76        | 2.41         | 2.26         | 2.14          | 2.04          | 1.95          | 1.88          | 1.81          |  |
| 3.7                             | 10.06 | 2.90        | 2.53         | 2.37         | 2.25          | 2.14          | 2.05          | 1.97          | 1.90          |  |
| 3.8                             | 10.34 | 3.03        | 2.65         | 2.49         | 2.36          | 2.25          | 2.15          | 2.07          | 2.00          |  |
| 3.9                             | 10.61 | 3.18        | 2.78         | 2.61         | 2.47          | 2.35          | 2.25          | 2.17          | 2.09          |  |
| 4.0                             | 10.88 | 3.32        | 2.90         | 2.73         | 2.58          | 2.46          | 2.36          | 2.27          | 2.19          |  |
| 4.1                             | 11.15 | 3.47        | 3.03         | 2.85         | 2.70          | 2.57          | 2.47          | 2.37          | 2.29          |  |
| 4.2                             | 11.42 | 3.62        | 3.17         | 2.97         | 2.81          | 2.68          | 2.57          | 2.48          | 2.39          |  |
| 4.3                             | 11.70 | 3.77        | 3.30         | 3.10         | 2.94          | 2.80          | 2.68          | 2.58          | 2.49          |  |
| 4.4                             | 11.97 | 3.92        | 3.44         | 3.23         | 3.06          | 2.92          | 2.80          | 2.69          | 2.60          |  |
| 4.5                             | 12.24 | 4.08        | 3.58         | 3.36         | 3.18          | 3.04          | 2.91          | 2.80          | 2.71          |  |
| 4.6                             | 12.51 | 4.24        | 3.72         | 3.49         | 3.31          | 3.16          | 3.03          | 2.92          | 2.82          |  |
| 4.7                             | 12.78 | 4.40        | 3.86         | 3.63         | 3.44          | 3.28          | 3.15          | 3.03          | 2.93          |  |
| 4.8                             | 13.06 | 4.57        | 4.01         | 3.77         | 3.57          | 3.41          | 3.27          | 3.15          | 3.04          |  |
| 4.9                             | 13.33 | 4.74        | 4.16         | 3.91         | 3.70          | 3.54          | 3.39          | 3.27          | 3.15          |  |
| 5.0                             | 13.60 | 4.91        | 4.31         | 4.05         | 3.84          | 3.67          | 3.52          | 3.39          | 3.27          |  |
| 5.1                             | 13.87 | 5.08        | 4.46         | 4.20         | 3.98          | 3.80          | 3.64          | 3.51          | 3.39          |  |
| 5.2                             | 14.14 | 5.26        | 4.62         | 4.34         | 4.12          | 3.93          | 3.77          | 3.63          | 3.51          |  |
| 5.3                             | 14.42 | 5.44        | 4.78         | 4.49         | 4.26          | 4.07          | 3.90          | 3.76          | 3.63          |  |
| 5.4                             | 14.69 | 5.62        | 4.94         | 4.64         | 4.41          | 4.21          | 4.04          | 3.89          | 3.76          |  |
| 5.5                             | 14.96 | 5.81        | 5.10         | 4.80         | 4.55          | 4.35          | 4.17          | 4.02          | 3.88          |  |
| 5.6                             | 15.23 | 5.99        | 5.27         | 4.96         | 4.70          | 4.49          | 4.31          | 4.15          | 4.01          |  |
| 5.7                             | 15.50 | 6.18        | 5.44         | 5.11         | 4.85          | 4.63          | 4.45          | 4.29          | 4.14          |  |
| 5.8                             | 15.78 | 6.38        | 5.61         | 5.27         | 5.01          | 4.78          | 4.59          | 4.42          | 4.27          |  |
| 5.9                             | 16.05 | 6.57        | 5.78         | 5.44         | 5.16          | 4.93          | 4.73          | 4.56          | 4.41          |  |
| 6.0                             | 16.32 | 6.77        | 5.96         | 5.60         | 5.32          | 5.08          | 4.88          | 4.70          | 4.54          |  |
| 6.1                             | 16.59 | 6.97        | 6.13         | 5.77         | 5.48          | 5.23          | 5.02          | 4.84          | 4.68          |  |
| 6.2                             | 16.86 | 7.17        | 6.31         | 5.94         | 5.64          | 5.39          | 5.17          | 4.99          | 4.82          |  |
| 6.3                             | 17.13 | 7.38        | 6.49         | 6.11         | 5.80          | 5.54          | 5.32          | 5.13          | 4.96          |  |
| 6.4                             | 17.41 | 7.58        | 6.68         | 6.29         | 5.97          | 5.70          | 5.48          | 5.28          | 5.10          |  |
| 6.5                             | 17.68 | 7.79        | 6.87         | 6.46         | 6.14          | 5.86          | 5.63          | 5.43          | 5.25          |  |
| 6.6                             | 17.95 | 8.01        | 7.05         | 6.64         | 6.31          | 6.03          | 5.79          | 5.58          | 5.39          |  |
| 6.7                             | 18.22 | 8.22        | 7.25         | 6.82         | 6.48          | 6.19          | 5.95          | 5.73          | 5.54          |  |

## 1¼" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |       |             |              |              |               |               |               |               |               |  |
|---------------------------------|-------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|--|
| Velocity (ft/s)                 | gpm   | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |  |
| 6.8                             | 18.49 | 8.44        | 7.44         | 7.01         | 6.65          | 6.36          | 6.11          | 5.89          | 5.69          |  |
| 6.9                             | 18.77 | 8.66        | 7.64         | 7.19         | 6.83          | 6.53          | 6.27          | 6.05          | 5.85          |  |
| 7.0                             | 19.04 | 8.88        | 7.83         | 7.38         | 7.01          | 6.70          | 6.44          | 6.20          | 6.00          |  |
| 7.1                             | 19.31 | 9.11        | 8.03         | 7.57         | 7.19          | 6.87          | 6.60          | 6.37          | 6.16          |  |
| 7.2                             | 19.58 | 9.34        | 8.24         | 7.76         | 7.37          | 7.05          | 6.77          | 6.53          | 6.31          |  |
| 7.3                             | 19.85 | 9.57        | 8.44         | 7.95         | 7.56          | 7.22          | 6.94          | 6.69          | 6.47          |  |
| 7.4                             | 20.13 | 9.80        | 8.65         | 8.15         | 7.74          | 7.40          | 7.11          | 6.86          | 6.63          |  |
| 7.5                             | 20.40 | 10.04       | 8.86         | 8.35         | 7.93          | 7.58          | 7.29          | 7.03          | 6.80          |  |
| 7.6                             | 20.67 | 10.27       | 9.07         | 8.55         | 8.12          | 7.77          | 7.46          | 7.20          | 6.96          |  |
| 7.7                             | 20.94 | 10.51       | 9.28         | 8.75         | 8.31          | 7.95          | 7.64          | 7.37          | 7.13          |  |
| 7.8                             | 21.21 | 10.76       | 9.50         | 8.95         | 8.51          | 8.14          | 7.82          | 7.54          | 7.30          |  |
| 7.9                             | 21.49 | 11.00       | 9.72         | 9.16         | 8.71          | 8.33          | 8.00          | 7.72          | 7.47          |  |
| 8.0                             | 21.76 | 11.25       | 9.94         | 9.37         | 8.90          | 8.52          | 8.19          | 7.90          | 7.64          |  |
| 8.1                             | 22.03 | 11.50       | 10.16        | 9.58         | 9.10          | 8.71          | 8.37          | 8.07          | 7.81          |  |
| 8.2                             | 22.30 | 11.75       | 10.38        | 9.79         | 9.31          | 8.90          | 8.56          | 8.26          | 7.99          |  |
| 8.3                             | 22.57 | 12.01       | 10.61        | 10.01        | 9.51          | 9.10          | 8.75          | 8.44          | 8.16          |  |
| 8.4                             | 22.85 | 12.26       | 10.84        | 10.22        | 9.72          | 9.30          | 8.94          | 8.62          | 8.34          |  |
| 8.5                             | 23.12 | 12.52       | 11.07        | 10.44        | 9.93          | 9.50          | 9.13          | 8.81          | 8.52          |  |
| 8.6                             | 23.39 | 12.79       | 11.31        | 10.66        | 10.14         | 9.70          | 9.33          | 9.00          | 8.71          |  |
| 8.7                             | 23.66 | 13.05       | 11.54        | 10.89        | 10.35         | 9.90          | 9.52          | 9.19          | 8.89          |  |
| 8.8                             | 23.93 | 13.32       | 11.78        | 11.11        | 10.57         | 10.11         | 9.72          | 9.38          | 9.08          |  |
| 8.9                             | 24.21 | 13.59       | 12.02        | 11.34        | 10.78         | 10.32         | 9.92          | 9.57          | 9.27          |  |
| 9.0                             | 24.48 | 13.86       | 12.26        | 11.57        | 11.00         | 10.53         | 10.12         | 9.77          | 9.45          |  |
| 9.1                             | 24.75 | 14.13       | 12.51        | 11.80        | 11.22         | 10.74         | 10.33         | 9.97          | 9.65          |  |
| 9.2                             | 25.02 | 14.41       | 12.75        | 12.03        | 11.45         | 10.95         | 10.53         | 10.17         | 9.84          |  |
| 9.3                             | 25.29 | 14.69       | 13.00        | 12.27        | 11.67         | 11.17         | 10.74         | 10.37         | 10.03         |  |
| 9.4                             | 25.57 | 14.97       | 13.25        | 12.50        | 11.90         | 11.39         | 10.95         | 10.57         | 10.23         |  |
| 9.5                             | 25.84 | 15.25       | 13.50        | 12.74        | 12.13         | 11.61         | 11.16         | 10.77         | 10.43         |  |
| 9.6                             | 26.11 | 15.54       | 13.76        | 12.99        | 12.36         | 11.83         | 11.38         | 10.98         | 10.63         |  |
| 9.7                             | 26.38 | 15.83       | 14.02        | 13.23        | 12.59         | 12.05         | 11.59         | 11.19         | 10.83         |  |
| 9.8                             | 26.65 | 16.12       | 14.28        | 13.48        | 12.82         | 12.28         | 11.81         | 11.40         | 11.03         |  |
| 9.9                             | 26.93 | 16.41       | 14.54        | 13.72        | 13.06         | 12.50         | 12.03         | 11.61         | 11.24         |  |
| 10.0                            | 27.20 | 16.71       | 14.80        | 13.97        | 13.30         | 12.73         | 12.25         | 11.82         | 11.45         |  |
| 10.1                            | 27.47 | 17.00       | 15.07        | 14.22        | 13.54         | 12.96         | 12.47         | 12.04         | 11.65         |  |
| 10.2                            | 27.74 | 17.30       | 15.34        | 14.48        | 13.78         | 13.19         | 12.70         | 12.26         | 11.87         |  |
| 10.3                            | 28.01 | 17.61       | 15.61        | 14.73        | 14.02         | 13.43         | 12.92         | 12.47         | 12.08         |  |
| 10.4                            | 28.29 | 17.91       | 15.88        | 14.99        | 14.27         | 13.66         | 13.15         | 12.69         | 12.29         |  |
| 10.5                            | 28.56 | 18.22       | 16.15        | 15.25        | 14.52         | 13.90         | 13.38         | 12.92         | 12.51         |  |
| 10.6                            | 28.83 | 18.53       | 16.43        | 15.51        | 14.77         | 14.14         | 13.61         | 13.14         | 12.72         |  |
| 10.7                            | 29.10 | 18.84       | 16.71        | 15.78        | 15.02         | 14.38         | 13.84         | 13.37         | 12.94         |  |
| 10.8                            | 29.37 | 19.15       | 16.99        | 16.04        | 15.27         | 14.63         | 14.08         | 13.59         | 13.16         |  |
| 10.9                            | 29.65 | 19.47       | 17.27        | 16.31        | 15.53         | 14.87         | 14.32         | 13.82         | 13.39         |  |
| 11.0                            | 29.92 | 19.79       | 17.55        | 16.58        | 15.79         | 15.12         | 14.55         | 14.05         | 13.61         |  |
| 11.1                            | 30.19 | 20.11       | 17.84        | 16.85        | 16.05         | 15.37         | 14.79         | 14.29         | 13.84         |  |
| 11.2                            | 30.46 | 20.43       | 18.13        | 17.13        | 16.31         | 15.62         | 15.04         | 14.52         | 14.06         |  |
| 11.3                            | 30.73 | 20.76       | 18.42        | 17.40        | 16.57         | 15.87         | 15.28         | 14.76         | 14.29         |  |
| 11.4                            | 31.01 | 21.09       | 18.71        | 17.68        | 16.84         | 16.13         | 15.53         | 14.99         | 14.52         |  |
| 11.5                            | 31.28 | 21.42       | 19.01        | 17.96        | 17.10         | 16.39         | 15.77         | 15.23         | 14.75         |  |
| 11.6                            | 31.55 | 21.75       | 19.31        | 18.24        | 17.37         | 16.64         | 16.02         | 15.48         | 14.99         |  |
| 11.7                            | 31.82 | 22.08       | 19.61        | 18.53        | 17.64         | 16.91         | 16.27         | 15.72         | 15.22         |  |
| 11.8                            | 32.09 | 22.42       | 19.91        | 18.81        | 17.92         | 17.17         | 16.53         | 15.96         | 15.46         |  |
| 11.9                            | 32.37 | 22.76       | 20.21        | 19.10        | 18.19         | 17.43         | 16.78         | 16.21         | 15.70         |  |
| 12.0                            | 32.64 | 23.10       | 20.52        | 19.39        | 18.47         | 17.70         | 17.04         | 16.46         | 15.94         |  |

# Uponor PEX friction loss tables

## 1½" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |       |             |              |              |               |               |               |               |               |  |
|---------------------------------|-------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|--|
| Velocity (ft/s)                 | gpm   | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |  |
| 1.5                             | 5.68  | 0.49        | 0.42         | 0.39         | 0.37          | 0.35          | 0.34          | 0.32          | 0.31          |  |
| 1.6                             | 6.06  | 0.55        | 0.47         | 0.44         | 0.42          | 0.40          | 0.38          | 0.36          | 0.35          |  |
| 1.7                             | 6.44  | 0.61        | 0.53         | 0.49         | 0.46          | 0.44          | 0.42          | 0.40          | 0.39          |  |
| 1.8                             | 6.82  | 0.67        | 0.58         | 0.54         | 0.51          | 0.49          | 0.46          | 0.45          | 0.43          |  |
| 1.9                             | 7.20  | 0.74        | 0.64         | 0.60         | 0.56          | 0.54          | 0.51          | 0.49          | 0.47          |  |
| 2.0                             | 7.58  | 0.80        | 0.70         | 0.65         | 0.62          | 0.59          | 0.56          | 0.54          | 0.52          |  |
| 2.1                             | 7.96  | 0.88        | 0.76         | 0.71         | 0.67          | 0.64          | 0.61          | 0.59          | 0.57          |  |
| 2.2                             | 8.34  | 0.95        | 0.83         | 0.77         | 0.73          | 0.69          | 0.66          | 0.64          | 0.61          |  |
| 2.3                             | 8.71  | 1.03        | 0.89         | 0.83         | 0.79          | 0.75          | 0.72          | 0.69          | 0.67          |  |
| 2.4                             | 9.09  | 1.10        | 0.96         | 0.90         | 0.85          | 0.81          | 0.77          | 0.74          | 0.72          |  |
| 2.5                             | 9.47  | 1.19        | 1.03         | 0.97         | 0.91          | 0.87          | 0.83          | 0.80          | 0.77          |  |
| 2.6                             | 9.85  | 1.27        | 1.11         | 1.04         | 0.98          | 0.93          | 0.89          | 0.86          | 0.83          |  |
| 2.7                             | 10.23 | 1.36        | 1.18         | 1.11         | 1.05          | 1.00          | 0.96          | 0.92          | 0.89          |  |
| 2.8                             | 10.61 | 1.45        | 1.26         | 1.18         | 1.12          | 1.06          | 1.02          | 0.98          | 0.95          |  |
| 2.9                             | 10.99 | 1.54        | 1.34         | 1.26         | 1.19          | 1.13          | 1.08          | 1.04          | 1.01          |  |
| 3.0                             | 11.37 | 1.63        | 1.42         | 1.33         | 1.26          | 1.20          | 1.15          | 1.11          | 1.07          |  |
| 3.1                             | 11.75 | 1.73        | 1.51         | 1.41         | 1.34          | 1.28          | 1.22          | 1.18          | 1.13          |  |
| 3.2                             | 12.12 | 1.83        | 1.60         | 1.50         | 1.42          | 1.35          | 1.29          | 1.24          | 1.20          |  |
| 3.3                             | 12.50 | 1.93        | 1.68         | 1.58         | 1.50          | 1.43          | 1.37          | 1.31          | 1.27          |  |
| 3.4                             | 12.88 | 2.03        | 1.78         | 1.67         | 1.58          | 1.50          | 1.44          | 1.39          | 1.34          |  |
| 3.5                             | 13.26 | 2.14        | 1.87         | 1.75         | 1.66          | 1.58          | 1.52          | 1.46          | 1.41          |  |
| 3.6                             | 13.64 | 2.24        | 1.96         | 1.84         | 1.75          | 1.66          | 1.60          | 1.54          | 1.48          |  |
| 3.7                             | 14.02 | 2.35        | 2.06         | 1.94         | 1.83          | 1.75          | 1.68          | 1.61          | 1.56          |  |
| 3.8                             | 14.40 | 2.47        | 2.16         | 2.03         | 1.92          | 1.83          | 1.76          | 1.69          | 1.63          |  |
| 3.9                             | 14.78 | 2.58        | 2.26         | 2.12         | 2.01          | 1.92          | 1.84          | 1.77          | 1.71          |  |
| 4.0                             | 15.16 | 2.70        | 2.37         | 2.22         | 2.11          | 2.01          | 1.93          | 1.85          | 1.79          |  |
| 4.1                             | 15.53 | 2.82        | 2.47         | 2.32         | 2.20          | 2.10          | 2.01          | 1.94          | 1.87          |  |
| 4.2                             | 15.91 | 2.94        | 2.58         | 2.42         | 2.30          | 2.19          | 2.10          | 2.02          | 1.96          |  |
| 4.3                             | 16.29 | 3.06        | 2.69         | 2.53         | 2.40          | 2.29          | 2.19          | 2.11          | 2.04          |  |
| 4.4                             | 16.67 | 3.19        | 2.80         | 2.63         | 2.50          | 2.38          | 2.29          | 2.20          | 2.13          |  |
| 4.5                             | 17.05 | 3.32        | 2.91         | 2.74         | 2.60          | 2.48          | 2.38          | 2.29          | 2.21          |  |
| 4.6                             | 17.43 | 3.45        | 3.03         | 2.85         | 2.70          | 2.58          | 2.48          | 2.38          | 2.30          |  |
| 4.7                             | 17.81 | 3.58        | 3.15         | 2.96         | 2.81          | 2.68          | 2.57          | 2.48          | 2.39          |  |
| 4.8                             | 18.19 | 3.72        | 3.27         | 3.07         | 2.92          | 2.78          | 2.67          | 2.57          | 2.49          |  |
| 4.9                             | 18.57 | 3.86        | 3.39         | 3.19         | 3.03          | 2.89          | 2.77          | 2.67          | 2.58          |  |
| 5.0                             | 18.94 | 4.00        | 3.51         | 3.31         | 3.14          | 2.99          | 2.87          | 2.77          | 2.68          |  |
| 5.1                             | 19.32 | 4.14        | 3.64         | 3.42         | 3.25          | 3.10          | 2.98          | 2.87          | 2.77          |  |
| 5.2                             | 19.70 | 4.28        | 3.77         | 3.54         | 3.36          | 3.21          | 3.08          | 2.97          | 2.87          |  |
| 5.3                             | 20.08 | 4.43        | 3.90         | 3.67         | 3.48          | 3.32          | 3.19          | 3.08          | 2.97          |  |
| 5.4                             | 20.46 | 4.58        | 4.03         | 3.79         | 3.60          | 3.44          | 3.30          | 3.18          | 3.07          |  |
| 5.5                             | 20.84 | 4.73        | 4.16         | 3.92         | 3.72          | 3.55          | 3.41          | 3.29          | 3.18          |  |
| 5.6                             | 21.22 | 4.88        | 4.30         | 4.05         | 3.84          | 3.67          | 3.52          | 3.40          | 3.28          |  |
| 5.7                             | 21.60 | 5.03        | 4.44         | 4.18         | 3.96          | 3.79          | 3.64          | 3.51          | 3.39          |  |
| 5.8                             | 21.98 | 5.19        | 4.57         | 4.31         | 4.09          | 3.91          | 3.75          | 3.62          | 3.50          |  |
| 5.9                             | 22.35 | 5.35        | 4.72         | 4.44         | 4.22          | 4.03          | 3.87          | 3.73          | 3.61          |  |
| 6.0                             | 22.73 | 5.51        | 4.86         | 4.58         | 4.35          | 4.15          | 3.99          | 3.85          | 3.72          |  |
| 6.1                             | 23.11 | 5.67        | 5.00         | 4.71         | 4.48          | 4.28          | 4.11          | 3.96          | 3.83          |  |
| 6.2                             | 23.49 | 5.84        | 5.15         | 4.85         | 4.61          | 4.41          | 4.23          | 4.08          | 3.94          |  |
| 6.3                             | 23.87 | 6.01        | 5.30         | 4.99         | 4.74          | 4.53          | 4.36          | 4.20          | 4.06          |  |
| 6.4                             | 24.25 | 6.18        | 5.45         | 5.13         | 4.88          | 4.66          | 4.48          | 4.32          | 4.18          |  |
| 6.5                             | 24.63 | 6.35        | 5.60         | 5.28         | 5.02          | 4.80          | 4.61          | 4.44          | 4.30          |  |
| 6.6                             | 25.01 | 6.52        | 5.76         | 5.43         | 5.16          | 4.93          | 4.74          | 4.57          | 4.42          |  |
| 6.7                             | 25.38 | 6.70        | 5.91         | 5.57         | 5.30          | 5.06          | 4.87          | 4.69          | 4.54          |  |

## 1½" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |       |             |              |              |               |               |               |               |               |  |
|---------------------------------|-------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|--|
| Velocity (ft/s)                 | gpm   | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |  |
| 6.8                             | 25.76 | 6.88        | 6.07         | 5.72         | 5.44          | 5.20          | 5.00          | 4.82          | 4.66          |  |
| 6.9                             | 26.14 | 7.06        | 6.23         | 5.87         | 5.58          | 5.34          | 5.13          | 4.95          | 4.79          |  |
| 7.0                             | 26.52 | 7.24        | 6.39         | 6.03         | 5.73          | 5.48          | 5.27          | 5.08          | 4.91          |  |
| 7.1                             | 26.90 | 7.42        | 6.56         | 6.18         | 5.88          | 5.62          | 5.40          | 5.21          | 5.04          |  |
| 7.2                             | 27.28 | 7.61        | 6.72         | 6.34         | 6.03          | 5.76          | 5.54          | 5.34          | 5.17          |  |
| 7.3                             | 27.66 | 7.80        | 6.89         | 6.50         | 6.18          | 5.91          | 5.68          | 5.48          | 5.30          |  |
| 7.4                             | 28.04 | 7.99        | 7.06         | 6.66         | 6.33          | 6.05          | 5.82          | 5.61          | 5.43          |  |
| 7.5                             | 28.42 | 8.18        | 7.23         | 6.82         | 6.48          | 6.20          | 5.96          | 5.75          | 5.56          |  |
| 7.6                             | 28.79 | 8.37        | 7.40         | 6.98         | 6.64          | 6.35          | 6.11          | 5.89          | 5.70          |  |
| 7.7                             | 29.17 | 8.57        | 7.58         | 7.15         | 6.80          | 6.50          | 6.25          | 6.03          | 5.84          |  |
| 7.8                             | 29.55 | 8.77        | 7.76         | 7.32         | 6.96          | 6.66          | 6.40          | 6.17          | 5.97          |  |
| 7.9                             | 29.93 | 8.97        | 7.93         | 7.48         | 7.12          | 6.81          | 6.55          | 6.32          | 6.11          |  |
| 8.0                             | 30.31 | 9.17        | 8.12         | 7.66         | 7.28          | 6.97          | 6.70          | 6.46          | 6.25          |  |
| 8.1                             | 30.69 | 9.37        | 8.30         | 7.83         | 7.45          | 7.13          | 6.85          | 6.61          | 6.40          |  |
| 8.2                             | 31.07 | 9.58        | 8.48         | 8.00         | 7.61          | 7.28          | 7.01          | 6.76          | 6.54          |  |
| 8.3                             | 31.45 | 9.79        | 8.67         | 8.18         | 7.78          | 7.45          | 7.16          | 6.91          | 6.69          |  |
| 8.4                             | 31.83 | 10.00       | 8.85         | 8.36         | 7.95          | 7.61          | 7.32          | 7.06          | 6.83          |  |
| 8.5                             | 32.20 | 10.21       | 9.04         | 8.53         | 8.12          | 7.77          | 7.48          | 7.21          | 6.98          |  |
| 8.6                             | 32.58 | 10.42       | 9.23         | 8.72         | 8.29          | 7.94          | 7.63          | 7.37          | 7.13          |  |
| 8.7                             | 32.96 | 10.64       | 9.43         | 8.90         | 8.47          | 8.10          | 7.80          | 7.52          | 7.28          |  |
| 8.8                             | 33.34 | 10.86       | 9.62         | 9.08         | 8.64          | 8.27          | 7.96          | 7.68          | 7.43          |  |
| 8.9                             | 33.72 | 11.08       | 9.82         | 9.27         | 8.82          | 8.44          | 8.12          | 7.84          | 7.59          |  |
| 9.0                             | 34.10 | 11.30       | 10.02        | 9.46         | 9.00          | 8.62          | 8.29          | 8.00          | 7.74          |  |
| 9.1                             | 34.48 | 11.53       | 10.22        | 9.65         | 9.18          | 8.79          | 8.46          | 8.16          | 7.90          |  |
| 9.2                             | 34.86 | 11.75       | 10.42        | 9.84         | 9.36          | 8.96          | 8.62          | 8.32          | 8.06          |  |
| 9.3                             | 35.24 | 11.98       | 10.62        | 10.03        | 9.55          | 9.14          | 8.79          | 8.49          | 8.22          |  |
| 9.4                             | 35.61 | 12.21       | 10.83        | 10.22        | 9.73          | 9.32          | 8.97          | 8.66          | 8.38          |  |
| 9.5                             | 35.99 | 12.44       | 11.03        | 10.42        | 9.92          | 9.50          | 9.14          | 8.82          | 8.54          |  |
| 9.6                             | 36.37 | 12.67       | 11.24        | 10.62        | 10.11         | 9.68          | 9.31          | 8.99          | 8.71          |  |
| 9.7                             | 36.75 | 12.91       | 11.45        | 10.82        | 10.30         | 9.86          | 9.49          | 9.16          | 8.87          |  |
| 9.8                             | 37.13 | 13.15       | 11.67        | 11.02        | 10.49         | 10.05         | 9.67          | 9.33          | 9.04          |  |
| 9.9                             | 37.51 | 13.39       | 11.88        | 11.22        | 10.68         | 10.23         | 9.85          | 9.51          | 9.21          |  |
| 10.0                            | 37.89 | 13.63       | 12.10        | 11.43        | 10.88         | 10.42         | 10.03         | 9.68          | 9.38          |  |
| 10.1                            | 38.27 | 13.87       | 12.31        | 11.63        | 11.08         | 10.61         | 10.21         | 9.86          | 9.55          |  |
| 10.2                            | 38.65 | 14.12       | 12.53        | 11.84        | 11.28         | 10.80         | 10.39         | 10.04         | 9.72          |  |
| 10.3                            | 39.02 | 14.36       | 12.75        | 12.05        | 11.48         | 10.99         | 10.58         | 10.22         | 9.89          |  |
| 10.4                            | 39.40 | 14.61       | 12.98        | 12.26        | 11.68         | 11.19         | 10.77         | 10.40         | 10.07         |  |
| 10.5                            | 39.78 | 14.86       | 13.20        | 12.47        | 11.88         | 11.38         | 10.96         | 10.58         | 10.25         |  |
| 10.6                            | 40.16 | 15.12       | 13.43        | 12.69        | 12.08         | 11.58         | 11.14         | 10.76         | 10.42         |  |
| 10.7                            | 40.54 | 15.37       | 13.65        | 12.90        | 12.29         | 11.78         | 11.34         | 10.95         | 10.60         |  |
| 10.8                            | 40.92 | 15.63       | 13.88        | 13.12        | 12.50         | 11.98         | 11.53         | 11.13         | 10.78         |  |
| 10.9                            | 41.30 | 15.89       | 14.12        | 13.34        | 12.71         | 12.18         | 11.72         | 11.32         | 10.97         |  |
| 11.0                            | 41.68 | 16.15       | 14.35        | 13.56        | 12.92         | 12.38         | 11.92         | 11.51         | 11.15         |  |
| 11.1                            | 42.06 | 16.41       | 14.58        | 13.78        | 13.13         | 12.58         | 12.12         | 11.70         | 11.33         |  |
| 11.2                            | 42.43 | 16.67       | 14.82        | 14.01        | 13.35         | 12.79         | 12.31         | 11.89         | 11.52         |  |
| 11.3                            | 42.81 | 16.94       | 15.06        | 14.24        | 13.56         | 13.00         | 12.51         | 12.09         | 11.71         |  |
| 11.4                            | 43.19 | 17.21       | 15.30        | 14.46        | 13.78         | 13.21         | 12.72         | 12.28         | 11.90         |  |
| 11.5                            | 43.57 | 17.48       | 15.54        | 14.69        | 14.00         | 13.42         | 12.92         | 12.48         | 12.09         |  |
| 11.6                            | 43.95 | 17.75       | 15.78        | 14.92        | 14.22         | 13.63         | 13.12         | 12.68         | 12.28         |  |
| 11.7                            | 44.33 | 18.02       | 16.03        | 15.16        | 14.44         | 13.84         | 13.33         | 12.88         | 12.47         |  |
| 11.8                            | 44.71 | 18.30       | 16.28        | 15.39        | 14.67         | 14.06         | 13.54         | 13.08         | 12.67         |  |
| 11.9                            | 45.09 | 18.58       | 16.52        | 15.62        | 14.89         | 14.27         | 13.75         | 13.28         | 12.86         |  |
| 12.0                            | 45.47 | 18.86       | 16.77        | 15.86        | 15.12         | 14.49         | 13.96         | 13.48         | 13.06         |  |

# Uponor PEX friction loss tables

## 2" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |       |             |              |              |               |               |               |               |               |  |
|---------------------------------|-------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|--|
| Velocity (ft/s)                 | gpm   | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |  |
| 1.5                             | 9.75  | 0.35        | 0.30         | 0.28         | 0.27          | 0.25          | 0.24          | 0.23          | 0.22          |  |
| 1.6                             | 10.39 | 0.39        | 0.34         | 0.32         | 0.30          | 0.28          | 0.27          | 0.26          | 0.25          |  |
| 1.7                             | 11.04 | 0.43        | 0.38         | 0.35         | 0.33          | 0.32          | 0.30          | 0.29          | 0.28          |  |
| 1.8                             | 11.69 | 0.48        | 0.41         | 0.39         | 0.37          | 0.35          | 0.33          | 0.32          | 0.31          |  |
| 1.9                             | 12.34 | 0.52        | 0.46         | 0.43         | 0.40          | 0.38          | 0.37          | 0.35          | 0.34          |  |
| 2.0                             | 12.99 | 0.57        | 0.50         | 0.47         | 0.44          | 0.42          | 0.40          | 0.39          | 0.37          |  |
| 2.1                             | 13.64 | 0.62        | 0.54         | 0.51         | 0.48          | 0.46          | 0.44          | 0.42          | 0.41          |  |
| 2.2                             | 14.29 | 0.68        | 0.59         | 0.55         | 0.52          | 0.50          | 0.48          | 0.46          | 0.44          |  |
| 2.3                             | 14.94 | 0.73        | 0.64         | 0.60         | 0.57          | 0.54          | 0.52          | 0.50          | 0.48          |  |
| 2.4                             | 15.59 | 0.79        | 0.69         | 0.64         | 0.61          | 0.58          | 0.56          | 0.54          | 0.52          |  |
| 2.5                             | 16.24 | 0.85        | 0.74         | 0.69         | 0.66          | 0.63          | 0.60          | 0.58          | 0.56          |  |
| 2.6                             | 16.89 | 0.91        | 0.79         | 0.74         | 0.70          | 0.67          | 0.64          | 0.62          | 0.60          |  |
| 2.7                             | 17.54 | 0.97        | 0.85         | 0.79         | 0.75          | 0.72          | 0.69          | 0.66          | 0.64          |  |
| 2.8                             | 18.19 | 1.03        | 0.90         | 0.85         | 0.80          | 0.77          | 0.73          | 0.71          | 0.68          |  |
| 2.9                             | 18.84 | 1.10        | 0.96         | 0.90         | 0.85          | 0.81          | 0.78          | 0.75          | 0.73          |  |
| 3.0                             | 19.49 | 1.16        | 1.02         | 0.96         | 0.91          | 0.87          | 0.83          | 0.80          | 0.77          |  |
| 3.1                             | 20.14 | 1.23        | 1.08         | 1.02         | 0.96          | 0.92          | 0.88          | 0.85          | 0.82          |  |
| 3.2                             | 20.79 | 1.30        | 1.14         | 1.07         | 1.02          | 0.97          | 0.93          | 0.90          | 0.87          |  |
| 3.3                             | 21.44 | 1.38        | 1.21         | 1.13         | 1.08          | 1.03          | 0.98          | 0.95          | 0.91          |  |
| 3.4                             | 22.09 | 1.45        | 1.27         | 1.20         | 1.13          | 1.08          | 1.04          | 1.00          | 0.97          |  |
| 3.5                             | 22.74 | 1.53        | 1.34         | 1.26         | 1.19          | 1.14          | 1.09          | 1.05          | 1.02          |  |
| 3.6                             | 23.39 | 1.60        | 1.41         | 1.32         | 1.26          | 1.20          | 1.15          | 1.11          | 1.07          |  |
| 3.7                             | 24.04 | 1.68        | 1.48         | 1.39         | 1.32          | 1.26          | 1.21          | 1.16          | 1.12          |  |
| 3.8                             | 24.69 | 1.76        | 1.55         | 1.46         | 1.38          | 1.32          | 1.27          | 1.22          | 1.18          |  |
| 3.9                             | 25.34 | 1.85        | 1.62         | 1.53         | 1.45          | 1.38          | 1.33          | 1.28          | 1.24          |  |
| 4.0                             | 25.99 | 1.93        | 1.70         | 1.60         | 1.52          | 1.45          | 1.39          | 1.34          | 1.29          |  |
| 4.1                             | 26.64 | 2.02        | 1.77         | 1.67         | 1.58          | 1.51          | 1.45          | 1.40          | 1.35          |  |
| 4.2                             | 27.29 | 2.10        | 1.85         | 1.74         | 1.65          | 1.58          | 1.52          | 1.46          | 1.41          |  |
| 4.3                             | 27.94 | 2.19        | 1.93         | 1.82         | 1.72          | 1.65          | 1.58          | 1.52          | 1.47          |  |
| 4.4                             | 28.59 | 2.28        | 2.01         | 1.89         | 1.80          | 1.72          | 1.65          | 1.59          | 1.54          |  |
| 4.5                             | 29.24 | 2.38        | 2.09         | 1.97         | 1.87          | 1.79          | 1.72          | 1.65          | 1.60          |  |
| 4.6                             | 29.89 | 2.47        | 2.18         | 2.05         | 1.95          | 1.86          | 1.79          | 1.72          | 1.66          |  |
| 4.7                             | 30.54 | 2.57        | 2.26         | 2.13         | 2.02          | 1.93          | 1.86          | 1.79          | 1.73          |  |
| 4.8                             | 31.18 | 2.66        | 2.35         | 2.21         | 2.10          | 2.01          | 1.93          | 1.86          | 1.80          |  |
| 4.9                             | 31.83 | 2.76        | 2.44         | 2.29         | 2.18          | 2.08          | 2.00          | 1.93          | 1.86          |  |
| 5.0                             | 32.48 | 2.86        | 2.53         | 2.38         | 2.26          | 2.16          | 2.07          | 2.00          | 1.93          |  |
| 5.1                             | 33.13 | 2.96        | 2.62         | 2.46         | 2.34          | 2.24          | 2.15          | 2.07          | 2.00          |  |
| 5.2                             | 33.78 | 3.07        | 2.71         | 2.55         | 2.42          | 2.32          | 2.23          | 2.15          | 2.08          |  |
| 5.3                             | 34.43 | 3.17        | 2.80         | 2.64         | 2.51          | 2.40          | 2.30          | 2.22          | 2.15          |  |
| 5.4                             | 35.08 | 3.28        | 2.90         | 2.73         | 2.59          | 2.48          | 2.38          | 2.30          | 2.22          |  |
| 5.5                             | 35.73 | 3.39        | 2.99         | 2.82         | 2.68          | 2.56          | 2.46          | 2.37          | 2.30          |  |
| 5.6                             | 36.38 | 3.50        | 3.09         | 2.91         | 2.77          | 2.65          | 2.54          | 2.45          | 2.37          |  |
| 5.7                             | 37.03 | 3.61        | 3.19         | 3.01         | 2.86          | 2.73          | 2.63          | 2.53          | 2.45          |  |
| 5.8                             | 37.68 | 3.72        | 3.29         | 3.10         | 2.95          | 2.82          | 2.71          | 2.61          | 2.53          |  |
| 5.9                             | 38.33 | 3.84        | 3.39         | 3.20         | 3.04          | 2.91          | 2.80          | 2.70          | 2.61          |  |
| 6.0                             | 38.98 | 3.95        | 3.49         | 3.30         | 3.13          | 3.00          | 2.88          | 2.78          | 2.69          |  |
| 6.1                             | 39.63 | 4.07        | 3.60         | 3.39         | 3.23          | 3.09          | 2.97          | 2.86          | 2.77          |  |
| 6.2                             | 40.28 | 4.19        | 3.71         | 3.50         | 3.32          | 3.18          | 3.06          | 2.95          | 2.85          |  |
| 6.3                             | 40.93 | 4.31        | 3.81         | 3.60         | 3.42          | 3.27          | 3.15          | 3.03          | 2.94          |  |
| 6.4                             | 41.58 | 4.43        | 3.92         | 3.70         | 3.52          | 3.37          | 3.24          | 3.12          | 3.02          |  |
| 6.5                             | 42.23 | 4.55        | 4.03         | 3.80         | 3.62          | 3.46          | 3.33          | 3.21          | 3.11          |  |
| 6.6                             | 42.88 | 4.68        | 4.14         | 3.91         | 3.72          | 3.56          | 3.42          | 3.30          | 3.19          |  |
| 6.7                             | 43.53 | 4.81        | 4.26         | 4.02         | 3.82          | 3.66          | 3.52          | 3.39          | 3.28          |  |

## 2" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |       |             |              |              |               |               |               |               |               |  |
|---------------------------------|-------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|--|
| Velocity (ft/s)                 | gpm   | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |  |
| 6.8                             | 44.18 | 4.93        | 4.37         | 4.12         | 3.92          | 3.75          | 3.61          | 3.48          | 3.37          |  |
| 6.9                             | 44.83 | 5.06        | 4.49         | 4.23         | 4.03          | 3.86          | 3.71          | 3.58          | 3.46          |  |
| 7.0                             | 45.48 | 5.19        | 4.60         | 4.34         | 4.13          | 3.96          | 3.81          | 3.67          | 3.55          |  |
| 7.1                             | 46.13 | 5.33        | 4.72         | 4.46         | 4.24          | 4.06          | 3.90          | 3.77          | 3.65          |  |
| 7.2                             | 46.78 | 5.46        | 4.84         | 4.57         | 4.35          | 4.16          | 4.00          | 3.86          | 3.74          |  |
| 7.3                             | 47.43 | 5.60        | 4.96         | 4.68         | 4.46          | 4.27          | 4.10          | 3.96          | 3.83          |  |
| 7.4                             | 48.08 | 5.73        | 5.08         | 4.80         | 4.57          | 4.37          | 4.21          | 4.06          | 3.93          |  |
| 7.5                             | 48.73 | 5.87        | 5.21         | 4.92         | 4.68          | 4.48          | 4.31          | 4.16          | 4.03          |  |
| 7.6                             | 49.38 | 6.01        | 5.33         | 5.04         | 4.79          | 4.59          | 4.41          | 4.26          | 4.12          |  |
| 7.7                             | 50.03 | 6.15        | 5.46         | 5.16         | 4.91          | 4.70          | 4.52          | 4.36          | 4.22          |  |
| 7.8                             | 50.68 | 6.30        | 5.59         | 5.28         | 5.02          | 4.81          | 4.63          | 4.47          | 4.32          |  |
| 7.9                             | 51.33 | 6.44        | 5.72         | 5.40         | 5.14          | 4.92          | 4.73          | 4.57          | 4.42          |  |
| 8.0                             | 51.97 | 6.59        | 5.85         | 5.52         | 5.26          | 5.03          | 4.84          | 4.68          | 4.53          |  |
| 8.1                             | 52.62 | 6.73        | 5.98         | 5.65         | 5.38          | 5.15          | 4.95          | 4.78          | 4.63          |  |
| 8.2                             | 53.27 | 6.88        | 6.11         | 5.77         | 5.50          | 5.26          | 5.06          | 4.89          | 4.73          |  |
| 8.3                             | 53.92 | 7.03        | 6.24         | 5.90         | 5.62          | 5.38          | 5.18          | 5.00          | 4.84          |  |
| 8.4                             | 54.57 | 7.18        | 6.38         | 6.03         | 5.74          | 5.50          | 5.29          | 5.11          | 4.95          |  |
| 8.5                             | 55.22 | 7.34        | 6.52         | 6.16         | 5.86          | 5.62          | 5.41          | 5.22          | 5.05          |  |
| 8.6                             | 55.87 | 7.49        | 6.65         | 6.29         | 5.99          | 5.74          | 5.52          | 5.33          | 5.16          |  |
| 8.7                             | 56.52 | 7.65        | 6.79         | 6.42         | 6.11          | 5.86          | 5.64          | 5.44          | 5.27          |  |
| 8.8                             | 57.17 | 7.80        | 6.93         | 6.55         | 6.24          | 5.98          | 5.76          | 5.56          | 5.38          |  |
| 8.9                             | 57.82 | 7.96        | 7.08         | 6.69         | 6.37          | 6.10          | 5.87          | 5.67          | 5.49          |  |
| 9.0                             | 58.47 | 8.12        | 7.22         | 6.82         | 6.50          | 6.23          | 5.99          | 5.79          | 5.61          |  |
| 9.1                             | 59.12 | 8.28        | 7.36         | 6.96         | 6.63          | 6.35          | 6.12          | 5.91          | 5.72          |  |
| 9.2                             | 59.77 | 8.45        | 7.51         | 7.10         | 6.76          | 6.48          | 6.24          | 6.02          | 5.83          |  |
| 9.3                             | 60.42 | 8.61        | 7.66         | 7.24         | 6.90          | 6.61          | 6.36          | 6.14          | 5.95          |  |
| 9.4                             | 61.07 | 8.78        | 7.81         | 7.38         | 7.03          | 6.74          | 6.49          | 6.26          | 6.07          |  |
| 9.5                             | 61.72 | 8.94        | 7.95         | 7.52         | 7.17          | 6.87          | 6.61          | 6.39          | 6.18          |  |
| 9.6                             | 62.37 | 9.11        | 8.11         | 7.66         | 7.30          | 7.00          | 6.74          | 6.51          | 6.30          |  |
| 9.7                             | 63.02 | 9.28        | 8.26         | 7.81         | 7.44          | 7.13          | 6.87          | 6.63          | 6.42          |  |
| 9.8                             | 63.67 | 9.45        | 8.41         | 7.95         | 7.58          | 7.26          | 6.99          | 6.76          | 6.54          |  |
| 9.9                             | 64.32 | 9.63        | 8.57         | 8.10         | 7.72          | 7.40          | 7.12          | 6.88          | 6.67          |  |
| 10.0                            | 64.97 | 9.80        | 8.72         | 8.25         | 7.86          | 7.53          | 7.26          | 7.01          | 6.79          |  |
| 10.1                            | 65.62 | 9.98        | 8.88         | 8.40         | 8.00          | 7.67          | 7.39          | 7.14          | 6.91          |  |
| 10.2                            | 66.27 | 10.15       | 9.04         | 8.55         | 8.15          | 7.81          | 7.52          | 7.27          | 7.04          |  |
| 10.3                            | 66.92 | 10.33       | 9.20         | 8.70         | 8.29          | 7.95          | 7.66          | 7.40          | 7.16          |  |
| 10.4                            | 67.57 | 10.51       | 9.36         | 8.85         | 8.44          | 8.09          | 7.79          | 7.53          | 7.29          |  |
| 10.5                            | 68.22 | 10.69       | 9.52         | 9.01         | 8.59          | 8.23          | 7.93          | 7.66          | 7.42          |  |
| 10.6                            | 68.87 | 10.87       | 9.68         | 9.16         | 8.73          | 8.37          | 8.06          | 7.79          | 7.55          |  |
| 10.7                            | 69.52 | 11.06       | 9.85         | 9.32         | 8.88          | 8.52          | 8.20          | 7.93          | 7.68          |  |
| 10.8                            | 70.17 | 11.24       | 10.02        | 9.48         | 9.03          | 8.66          | 8.34          | 8.06          | 7.81          |  |
| 10.9                            | 70.82 | 11.43       | 10.18        | 9.63         | 9.19          | 8.81          | 8.48          | 8.20          | 7.94          |  |
| 11.0                            | 71.47 | 11.62       | 10.35        | 9.79         | 9.34          | 8.95          | 8.63          | 8.33          | 8.07          |  |
| 11.1                            | 72.12 | 11.81       | 10.52        | 9.96         | 9.49          | 9.10          | 8.77          | 8.47          | 8.21          |  |
| 11.2                            | 72.76 | 12.00       | 10.69        | 10.12        | 9.65          | 9.25          | 8.91          | 8.61          | 8.34          |  |
| 11.3                            | 73.41 | 12.19       | 10.86        | 10.28        | 9.80          | 9.40          | 9.06          | 8.75          | 8.48          |  |
| 11.4                            | 74.06 | 12.38       | 11.04        | 10.45        | 9.96          | 9.55          | 9.20          | 8.89          | 8.62          |  |
| 11.5                            | 74.71 | 12.58       | 11.21        | 10.61        | 10.12         | 9.71          | 9.35          | 9.04          | 8.76          |  |
| 11.6                            | 75.36 | 12.78       | 11.39        | 10.78        | 10.28         | 9.86          | 9.50          | 9.18          | 8.89          |  |
| 11.7                            | 76.01 | 12.97       | 11.57        | 10.95        | 10.44         | 10.01         | 9.65          | 9.32          | 9.04          |  |
| 11.8                            | 76.66 | 13.17       | 11.74        | 11.12        | 10.60         | 10.17         | 9.80          | 9.47          | 9.18          |  |
| 11.9                            | 77.31 | 13.37       | 11.92        | 11.29        | 10.77         | 10.33         | 9.95          | 9.62          | 9.32          |  |
| 12.0                            | 77.96 | 13.57       | 12.11        | 11.46        | 10.93         | 10.48         | 10.10         | 9.76          | 9.46          |  |



# Uponor PEX friction loss tables

## 2½" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |       |             |              |              |               |               |               |               |               |
|---------------------------------|-------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|
| Velocity (ft/s)                 | gpm   | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |
| 1.5                             | 14.85 | 0.27        | 0.23         | 0.22         | 0.20          | 0.19          | 0.19          | 0.18          | 0.17          |
| 1.6                             | 15.84 | 0.30        | 0.26         | 0.24         | 0.23          | 0.22          | 0.21          | 0.20          | 0.19          |
| 1.7                             | 16.83 | 0.33        | 0.29         | 0.27         | 0.26          | 0.24          | 0.23          | 0.22          | 0.22          |
| 1.8                             | 17.82 | 0.37        | 0.32         | 0.30         | 0.28          | 0.27          | 0.26          | 0.25          | 0.24          |
| 1.9                             | 18.81 | 0.40        | 0.35         | 0.33         | 0.31          | 0.30          | 0.28          | 0.27          | 0.26          |
| 2.0                             | 19.80 | 0.44        | 0.38         | 0.36         | 0.34          | 0.32          | 0.31          | 0.30          | 0.29          |
| 2.1                             | 20.79 | 0.48        | 0.42         | 0.39         | 0.37          | 0.35          | 0.34          | 0.33          | 0.32          |
| 2.2                             | 21.78 | 0.52        | 0.45         | 0.43         | 0.40          | 0.38          | 0.37          | 0.35          | 0.34          |
| 2.3                             | 22.77 | 0.56        | 0.49         | 0.46         | 0.44          | 0.42          | 0.40          | 0.38          | 0.37          |
| 2.4                             | 23.76 | 0.61        | 0.53         | 0.50         | 0.47          | 0.45          | 0.43          | 0.41          | 0.40          |
| 2.5                             | 24.75 | 0.65        | 0.57         | 0.54         | 0.51          | 0.48          | 0.46          | 0.45          | 0.43          |
| 2.6                             | 25.74 | 0.70        | 0.61         | 0.57         | 0.54          | 0.52          | 0.50          | 0.48          | 0.46          |
| 2.7                             | 26.73 | 0.74        | 0.65         | 0.61         | 0.58          | 0.55          | 0.53          | 0.51          | 0.49          |
| 2.8                             | 27.72 | 0.79        | 0.70         | 0.65         | 0.62          | 0.59          | 0.57          | 0.55          | 0.53          |
| 2.9                             | 28.71 | 0.84        | 0.74         | 0.70         | 0.66          | 0.63          | 0.60          | 0.58          | 0.56          |
| 3.0                             | 29.70 | 0.90        | 0.79         | 0.74         | 0.70          | 0.67          | 0.64          | 0.62          | 0.60          |
| 3.1                             | 30.69 | 0.95        | 0.83         | 0.78         | 0.74          | 0.71          | 0.68          | 0.66          | 0.63          |
| 3.2                             | 31.68 | 1.00        | 0.88         | 0.83         | 0.79          | 0.75          | 0.72          | 0.69          | 0.67          |
| 3.3                             | 32.67 | 1.06        | 0.93         | 0.88         | 0.83          | 0.79          | 0.76          | 0.73          | 0.71          |
| 3.4                             | 33.66 | 1.12        | 0.98         | 0.92         | 0.88          | 0.84          | 0.80          | 0.77          | 0.75          |
| 3.5                             | 34.65 | 1.18        | 1.03         | 0.97         | 0.92          | 0.88          | 0.85          | 0.82          | 0.79          |
| 3.6                             | 35.64 | 1.23        | 1.09         | 1.02         | 0.97          | 0.93          | 0.89          | 0.86          | 0.83          |
| 3.7                             | 36.63 | 1.30        | 1.14         | 1.08         | 1.02          | 0.98          | 0.94          | 0.90          | 0.87          |
| 3.8                             | 37.62 | 1.36        | 1.20         | 1.13         | 1.07          | 1.02          | 0.98          | 0.95          | 0.91          |
| 3.9                             | 38.61 | 1.42        | 1.25         | 1.18         | 1.12          | 1.07          | 1.03          | 0.99          | 0.96          |
| 4.0                             | 39.60 | 1.49        | 1.31         | 1.24         | 1.17          | 1.12          | 1.08          | 1.04          | 1.00          |
| 4.1                             | 40.59 | 1.55        | 1.37         | 1.29         | 1.23          | 1.17          | 1.13          | 1.09          | 1.05          |
| 4.2                             | 41.58 | 1.62        | 1.43         | 1.35         | 1.28          | 1.22          | 1.18          | 1.13          | 1.10          |
| 4.3                             | 42.57 | 1.69        | 1.49         | 1.41         | 1.34          | 1.28          | 1.23          | 1.18          | 1.14          |
| 4.4                             | 43.57 | 1.76        | 1.55         | 1.47         | 1.39          | 1.33          | 1.28          | 1.23          | 1.19          |
| 4.5                             | 44.56 | 1.83        | 1.62         | 1.53         | 1.45          | 1.39          | 1.33          | 1.28          | 1.24          |
| 4.6                             | 45.55 | 1.90        | 1.68         | 1.59         | 1.51          | 1.44          | 1.39          | 1.34          | 1.29          |
| 4.7                             | 46.54 | 1.98        | 1.75         | 1.65         | 1.57          | 1.50          | 1.44          | 1.39          | 1.34          |
| 4.8                             | 47.53 | 2.05        | 1.82         | 1.71         | 1.63          | 1.56          | 1.50          | 1.44          | 1.39          |
| 4.9                             | 48.52 | 2.13        | 1.88         | 1.78         | 1.69          | 1.61          | 1.55          | 1.50          | 1.45          |
| 5.0                             | 49.51 | 2.21        | 1.95         | 1.84         | 1.75          | 1.67          | 1.61          | 1.55          | 1.50          |
| 5.1                             | 50.50 | 2.29        | 2.02         | 1.91         | 1.81          | 1.74          | 1.67          | 1.61          | 1.56          |
| 5.2                             | 51.49 | 2.37        | 2.09         | 1.98         | 1.88          | 1.80          | 1.73          | 1.67          | 1.61          |
| 5.3                             | 52.48 | 2.45        | 2.17         | 2.04         | 1.94          | 1.86          | 1.79          | 1.72          | 1.67          |
| 5.4                             | 53.47 | 2.53        | 2.24         | 2.11         | 2.01          | 1.92          | 1.85          | 1.78          | 1.73          |
| 5.5                             | 54.46 | 2.61        | 2.32         | 2.18         | 2.08          | 1.99          | 1.91          | 1.84          | 1.78          |
| 5.6                             | 55.45 | 2.70        | 2.39         | 2.26         | 2.15          | 2.05          | 1.97          | 1.91          | 1.84          |
| 5.7                             | 56.44 | 2.79        | 2.47         | 2.33         | 2.22          | 2.12          | 2.04          | 1.97          | 1.90          |
| 5.8                             | 57.43 | 2.87        | 2.55         | 2.40         | 2.29          | 2.19          | 2.10          | 2.03          | 1.96          |
| 5.9                             | 58.42 | 2.96        | 2.62         | 2.48         | 2.36          | 2.26          | 2.17          | 2.09          | 2.03          |
| 6.0                             | 59.41 | 3.05        | 2.71         | 2.55         | 2.43          | 2.33          | 2.24          | 2.16          | 2.09          |
| 6.1                             | 60.40 | 3.14        | 2.79         | 2.63         | 2.50          | 2.40          | 2.30          | 2.22          | 2.15          |
| 6.2                             | 61.39 | 3.23        | 2.87         | 2.71         | 2.58          | 2.47          | 2.37          | 2.29          | 2.22          |
| 6.3                             | 62.38 | 3.33        | 2.95         | 2.79         | 2.65          | 2.54          | 2.44          | 2.36          | 2.28          |
| 6.4                             | 63.37 | 3.42        | 3.04         | 2.87         | 2.73          | 2.61          | 2.51          | 2.43          | 2.35          |
| 6.5                             | 64.36 | 3.52        | 3.12         | 2.95         | 2.81          | 2.69          | 2.58          | 2.49          | 2.41          |
| 6.6                             | 65.35 | 3.61        | 3.21         | 3.03         | 2.88          | 2.76          | 2.66          | 2.56          | 2.48          |
| 6.7                             | 66.34 | 3.71        | 3.30         | 3.11         | 2.96          | 2.84          | 2.73          | 2.64          | 2.55          |

## 2½" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |        |             |              |              |               |               |               |               |               |
|---------------------------------|--------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|
| Velocity (ft/s)                 | gpm    | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |
| 6.8                             | 67.33  | 3.81        | 3.38         | 3.20         | 3.04          | 2.91          | 2.80          | 2.71          | 2.62          |
| 6.9                             | 68.32  | 3.91        | 3.47         | 3.28         | 3.12          | 2.99          | 2.88          | 2.78          | 2.69          |
| 7.0                             | 69.31  | 4.01        | 3.56         | 3.37         | 3.21          | 3.07          | 2.96          | 2.85          | 2.76          |
| 7.1                             | 70.30  | 4.12        | 3.66         | 3.45         | 3.29          | 3.15          | 3.03          | 2.93          | 2.83          |
| 7.2                             | 71.29  | 4.22        | 3.75         | 3.54         | 3.37          | 3.23          | 3.11          | 3.00          | 2.91          |
| 7.3                             | 72.28  | 4.33        | 3.84         | 3.63         | 3.46          | 3.31          | 3.19          | 3.08          | 2.98          |
| 7.4                             | 73.27  | 4.43        | 3.94         | 3.72         | 3.54          | 3.40          | 3.27          | 3.16          | 3.06          |
| 7.5                             | 74.26  | 4.54        | 4.03         | 3.81         | 3.63          | 3.48          | 3.35          | 3.23          | 3.13          |
| 7.6                             | 75.25  | 4.65        | 4.13         | 3.90         | 3.72          | 3.56          | 3.43          | 3.31          | 3.21          |
| 7.7                             | 76.24  | 4.76        | 4.23         | 4.00         | 3.81          | 3.65          | 3.51          | 3.39          | 3.28          |
| 7.8                             | 77.23  | 4.87        | 4.33         | 4.09         | 3.90          | 3.73          | 3.60          | 3.47          | 3.36          |
| 7.9                             | 78.22  | 4.98        | 4.43         | 4.19         | 3.99          | 3.82          | 3.68          | 3.55          | 3.44          |
| 8.0                             | 79.21  | 5.09        | 4.53         | 4.28         | 4.08          | 3.91          | 3.76          | 3.63          | 3.52          |
| 8.1                             | 80.20  | 5.21        | 4.63         | 4.38         | 4.17          | 4.00          | 3.85          | 3.72          | 3.60          |
| 8.2                             | 81.19  | 5.32        | 4.73         | 4.48         | 4.27          | 4.09          | 3.94          | 3.80          | 3.68          |
| 8.3                             | 82.18  | 5.44        | 4.84         | 4.58         | 4.36          | 4.18          | 4.02          | 3.89          | 3.76          |
| 8.4                             | 83.17  | 5.55        | 4.94         | 4.68         | 4.46          | 4.27          | 4.11          | 3.97          | 3.85          |
| 8.5                             | 84.16  | 5.67        | 5.05         | 4.78         | 4.55          | 4.36          | 4.20          | 4.06          | 3.93          |
| 8.6                             | 85.15  | 5.79        | 5.16         | 4.88         | 4.65          | 4.46          | 4.29          | 4.14          | 4.01          |
| 8.7                             | 86.14  | 5.91        | 5.27         | 4.98         | 4.75          | 4.55          | 4.38          | 4.23          | 4.10          |
| 8.8                             | 87.13  | 6.04        | 5.37         | 5.08         | 4.85          | 4.65          | 4.47          | 4.32          | 4.19          |
| 8.9                             | 88.12  | 6.16        | 5.49         | 5.19         | 4.95          | 4.74          | 4.57          | 4.41          | 4.27          |
| 9.0                             | 89.11  | 6.28        | 5.60         | 5.29         | 5.05          | 4.84          | 4.66          | 4.50          | 4.36          |
| 9.1                             | 90.10  | 6.41        | 5.71         | 5.40         | 5.15          | 4.94          | 4.75          | 4.59          | 4.45          |
| 9.2                             | 91.09  | 6.53        | 5.82         | 5.51         | 5.25          | 5.03          | 4.85          | 4.68          | 4.54          |
| 9.3                             | 92.08  | 6.66        | 5.94         | 5.62         | 5.36          | 5.13          | 4.95          | 4.78          | 4.63          |
| 9.4                             | 93.07  | 6.79        | 6.05         | 5.73         | 5.46          | 5.23          | 5.04          | 4.87          | 4.72          |
| 9.5                             | 94.06  | 6.92        | 6.17         | 5.84         | 5.57          | 5.34          | 5.14          | 4.97          | 4.81          |
| 9.6                             | 95.05  | 7.05        | 6.28         | 5.95         | 5.67          | 5.44          | 5.24          | 5.06          | 4.90          |
| 9.7                             | 96.04  | 7.18        | 6.40         | 6.06         | 5.78          | 5.54          | 5.34          | 5.16          | 5.00          |
| 9.8                             | 97.03  | 7.32        | 6.52         | 6.17         | 5.89          | 5.65          | 5.44          | 5.25          | 5.09          |
| 9.9                             | 98.02  | 7.45        | 6.64         | 6.29         | 6.00          | 5.75          | 5.54          | 5.35          | 5.19          |
| 10.0                            | 99.01  | 7.58        | 6.76         | 6.40         | 6.11          | 5.86          | 5.64          | 5.45          | 5.28          |
| 10.1                            | 100.00 | 7.72        | 6.89         | 6.52         | 6.22          | 5.96          | 5.74          | 5.55          | 5.38          |
| 10.2                            | 100.99 | 7.86        | 7.01         | 6.64         | 6.33          | 6.07          | 5.85          | 5.65          | 5.48          |
| 10.3                            | 101.98 | 8.00        | 7.13         | 6.75         | 6.44          | 6.18          | 5.95          | 5.75          | 5.57          |
| 10.4                            | 102.97 | 8.14        | 7.26         | 6.87         | 6.56          | 6.29          | 6.06          | 5.85          | 5.67          |
| 10.5                            | 103.96 | 8.28        | 7.38         | 6.99         | 6.67          | 6.40          | 6.16          | 5.96          | 5.77          |
| 10.6                            | 104.95 | 8.42        | 7.51         | 7.11         | 6.79          | 6.51          | 6.27          | 6.06          | 5.87          |
| 10.7                            | 105.94 | 8.56        | 7.64         | 7.23         | 6.90          | 6.62          | 6.38          | 6.17          | 5.97          |
| 10.8                            | 106.93 | 8.70        | 7.77         | 7.36         | 7.02          | 6.73          | 6.49          | 6.27          | 6.08          |
| 10.9                            | 107.92 | 8.85        | 7.90         | 7.48         | 7.14          | 6.85          | 6.60          | 6.38          | 6.18          |
| 11.0                            | 108.91 | 8.99        | 8.03         | 7.60         | 7.26          | 6.96          | 6.71          | 6.48          | 6.28          |
| 11.1                            | 109.90 | 9.14        | 8.16         | 7.73         | 7.38          | 7.08          | 6.82          | 6.59          | 6.39          |
| 11.2                            | 110.89 | 9.29        | 8.29         | 7.86         | 7.50          | 7.19          | 6.93          | 6.70          | 6.49          |
| 11.3                            | 111.88 | 9.44        | 8.43         | 7.98         | 7.62          | 7.31          | 7.04          | 6.81          | 6.60          |
| 11.4                            | 112.87 | 9.59        | 8.56         | 8.11         | 7.74          | 7.43          | 7.16          | 6.92          | 6.71          |
| 11.5                            | 113.86 | 9.74        | 8.70         | 8.24         | 7.86          | 7.55          | 7.27          | 7.03          | 6.81          |
| 11.6                            | 114.85 | 9.89        | 8.84         | 8.37         | 7.99          | 7.66          | 7.39          | 7.14          | 6.92          |
| 11.7                            | 115.84 | 10.05       | 8.97         | 8.50         | 8.11          | 7.79          | 7.50          | 7.25          | 7.03          |
| 11.8                            | 116.83 | 10.20       | 9.11         | 8.63         | 8.24          | 7.91          | 7.62          | 7.37          | 7.14          |
| 11.9                            | 117.82 | 10.35       | 9.25         | 8.77         | 8.37          | 8.03          | 7.74          | 7.48          | 7.25          |
| 12.0                            | 118.81 | 10.51       | 9.39         | 8.90         | 8.49          | 8.15          | 7.86          | 7.60          | 7.36          |

# Uponor PEX friction loss tables

## 3" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |       |             |              |              |               |               |               |               |               |  |
|---------------------------------|-------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|--|
| Velocity (ft/s)                 | gpm   | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |  |
| 1.5                             | 21.12 | 0.21        | 0.19         | 0.17         | 0.16          | 0.16          | 0.15          | 0.14          | 0.14          |  |
| 1.6                             | 22.53 | 0.24        | 0.21         | 0.20         | 0.18          | 0.18          | 0.17          | 0.16          | 0.16          |  |
| 1.7                             | 23.93 | 0.27        | 0.23         | 0.22         | 0.21          | 0.20          | 0.19          | 0.18          | 0.17          |  |
| 1.8                             | 25.34 | 0.29        | 0.26         | 0.24         | 0.23          | 0.22          | 0.21          | 0.20          | 0.19          |  |
| 1.9                             | 26.75 | 0.32        | 0.28         | 0.26         | 0.25          | 0.24          | 0.23          | 0.22          | 0.21          |  |
| 2.0                             | 28.16 | 0.35        | 0.31         | 0.29         | 0.27          | 0.26          | 0.25          | 0.24          | 0.23          |  |
| 2.1                             | 29.57 | 0.38        | 0.34         | 0.32         | 0.30          | 0.29          | 0.27          | 0.26          | 0.25          |  |
| 2.2                             | 30.97 | 0.42        | 0.37         | 0.34         | 0.33          | 0.31          | 0.30          | 0.29          | 0.28          |  |
| 2.3                             | 32.38 | 0.45        | 0.40         | 0.37         | 0.35          | 0.34          | 0.32          | 0.31          | 0.30          |  |
| 2.4                             | 33.79 | 0.49        | 0.43         | 0.40         | 0.38          | 0.36          | 0.35          | 0.34          | 0.32          |  |
| 2.5                             | 35.20 | 0.52        | 0.46         | 0.43         | 0.41          | 0.39          | 0.37          | 0.36          | 0.35          |  |
| 2.6                             | 36.60 | 0.56        | 0.49         | 0.46         | 0.44          | 0.42          | 0.40          | 0.39          | 0.37          |  |
| 2.7                             | 38.01 | 0.60        | 0.53         | 0.49         | 0.47          | 0.45          | 0.43          | 0.41          | 0.40          |  |
| 2.8                             | 39.42 | 0.64        | 0.56         | 0.53         | 0.50          | 0.48          | 0.46          | 0.44          | 0.43          |  |
| 2.9                             | 40.83 | 0.68        | 0.60         | 0.56         | 0.53          | 0.51          | 0.49          | 0.47          | 0.45          |  |
| 3.0                             | 42.24 | 0.72        | 0.63         | 0.60         | 0.57          | 0.54          | 0.52          | 0.50          | 0.48          |  |
| 3.1                             | 43.64 | 0.76        | 0.67         | 0.63         | 0.60          | 0.57          | 0.55          | 0.53          | 0.51          |  |
| 3.2                             | 45.05 | 0.81        | 0.71         | 0.67         | 0.64          | 0.61          | 0.58          | 0.56          | 0.54          |  |
| 3.3                             | 46.46 | 0.85        | 0.75         | 0.71         | 0.67          | 0.64          | 0.62          | 0.59          | 0.57          |  |
| 3.4                             | 47.87 | 0.90        | 0.79         | 0.75         | 0.71          | 0.68          | 0.65          | 0.63          | 0.61          |  |
| 3.5                             | 49.28 | 0.95        | 0.83         | 0.79         | 0.75          | 0.71          | 0.69          | 0.66          | 0.64          |  |
| 3.6                             | 50.68 | 0.99        | 0.88         | 0.83         | 0.79          | 0.75          | 0.72          | 0.69          | 0.67          |  |
| 3.7                             | 52.09 | 1.04        | 0.92         | 0.87         | 0.82          | 0.79          | 0.76          | 0.73          | 0.71          |  |
| 3.8                             | 53.50 | 1.09        | 0.97         | 0.91         | 0.87          | 0.83          | 0.79          | 0.77          | 0.74          |  |
| 3.9                             | 54.91 | 1.15        | 1.01         | 0.95         | 0.91          | 0.87          | 0.83          | 0.80          | 0.78          |  |
| 4.0                             | 56.31 | 1.20        | 1.06         | 1.00         | 0.95          | 0.91          | 0.87          | 0.84          | 0.81          |  |
| 4.1                             | 57.72 | 1.25        | 1.11         | 1.04         | 0.99          | 0.95          | 0.91          | 0.88          | 0.85          |  |
| 4.2                             | 59.13 | 1.31        | 1.15         | 1.09         | 1.04          | 0.99          | 0.95          | 0.92          | 0.89          |  |
| 4.3                             | 60.54 | 1.36        | 1.20         | 1.14         | 1.08          | 1.03          | 0.99          | 0.96          | 0.93          |  |
| 4.4                             | 61.95 | 1.42        | 1.25         | 1.18         | 1.13          | 1.08          | 1.03          | 1.00          | 0.97          |  |
| 4.5                             | 63.35 | 1.48        | 1.31         | 1.23         | 1.17          | 1.12          | 1.08          | 1.04          | 1.01          |  |
| 4.6                             | 64.76 | 1.53        | 1.36         | 1.28         | 1.22          | 1.17          | 1.12          | 1.08          | 1.05          |  |
| 4.7                             | 66.17 | 1.59        | 1.41         | 1.33         | 1.27          | 1.21          | 1.17          | 1.12          | 1.09          |  |
| 4.8                             | 67.58 | 1.65        | 1.47         | 1.38         | 1.32          | 1.26          | 1.21          | 1.17          | 1.13          |  |
| 4.9                             | 68.99 | 1.72        | 1.52         | 1.44         | 1.37          | 1.31          | 1.26          | 1.21          | 1.17          |  |
| 5.0                             | 70.39 | 1.78        | 1.58         | 1.49         | 1.42          | 1.36          | 1.30          | 1.26          | 1.22          |  |
| 5.1                             | 71.80 | 1.84        | 1.63         | 1.54         | 1.47          | 1.40          | 1.35          | 1.30          | 1.26          |  |
| 5.2                             | 73.21 | 1.91        | 1.69         | 1.60         | 1.52          | 1.45          | 1.40          | 1.35          | 1.31          |  |
| 5.3                             | 74.62 | 1.97        | 1.75         | 1.65         | 1.57          | 1.51          | 1.45          | 1.40          | 1.35          |  |
| 5.4                             | 76.02 | 2.04        | 1.81         | 1.71         | 1.63          | 1.56          | 1.50          | 1.45          | 1.40          |  |
| 5.5                             | 77.43 | 2.11        | 1.87         | 1.77         | 1.68          | 1.61          | 1.55          | 1.49          | 1.45          |  |
| 5.6                             | 78.84 | 2.18        | 1.93         | 1.82         | 1.74          | 1.66          | 1.60          | 1.54          | 1.49          |  |
| 5.7                             | 80.25 | 2.25        | 1.99         | 1.88         | 1.79          | 1.72          | 1.65          | 1.59          | 1.54          |  |
| 5.8                             | 81.66 | 2.32        | 2.06         | 1.94         | 1.85          | 1.77          | 1.70          | 1.64          | 1.59          |  |
| 5.9                             | 83.06 | 2.39        | 2.12         | 2.00         | 1.91          | 1.83          | 1.76          | 1.70          | 1.64          |  |
| 6.0                             | 84.47 | 2.46        | 2.19         | 2.06         | 1.97          | 1.88          | 1.81          | 1.75          | 1.69          |  |
| 6.1                             | 85.88 | 2.53        | 2.25         | 2.13         | 2.03          | 1.94          | 1.87          | 1.80          | 1.74          |  |
| 6.2                             | 87.29 | 2.61        | 2.32         | 2.19         | 2.09          | 2.00          | 1.92          | 1.86          | 1.80          |  |
| 6.3                             | 88.70 | 2.68        | 2.39         | 2.25         | 2.15          | 2.06          | 1.98          | 1.91          | 1.85          |  |
| 6.4                             | 90.10 | 2.76        | 2.45         | 2.32         | 2.21          | 2.12          | 2.04          | 1.97          | 1.90          |  |
| 6.5                             | 91.51 | 2.84        | 2.52         | 2.38         | 2.27          | 2.18          | 2.09          | 2.02          | 1.96          |  |
| 6.6                             | 92.92 | 2.92        | 2.59         | 2.45         | 2.33          | 2.24          | 2.15          | 2.08          | 2.01          |  |
| 6.7                             | 94.33 | 2.99        | 2.66         | 2.52         | 2.40          | 2.30          | 2.21          | 2.14          | 2.07          |  |

## 3" Uponor AquaPEX (100% water)

| psi loss per 100 feet of tubing |        |             |              |              |               |               |               |               |               |  |
|---------------------------------|--------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|--|
| Velocity (ft/s)                 | gpm    | 40°F<br>4°C | 60°F<br>16°C | 80°F<br>27°C | 100°F<br>38°C | 120°F<br>49°C | 140°F<br>60°C | 160°F<br>71°C | 180°F<br>82°C |  |
| 6.8                             | 95.73  | 3.08        | 2.74         | 2.59         | 2.46          | 2.36          | 2.27          | 2.19          | 2.12          |  |
| 6.9                             | 97.14  | 3.16        | 2.81         | 2.65         | 2.53          | 2.42          | 2.33          | 2.25          | 2.18          |  |
| 7.0                             | 98.55  | 3.24        | 2.88         | 2.72         | 2.60          | 2.49          | 2.39          | 2.31          | 2.24          |  |
| 7.1                             | 99.96  | 3.32        | 2.96         | 2.80         | 2.66          | 2.55          | 2.46          | 2.37          | 2.30          |  |
| 7.2                             | 101.37 | 3.41        | 3.03         | 2.87         | 2.73          | 2.62          | 2.52          | 2.43          | 2.36          |  |
| 7.3                             | 102.77 | 3.49        | 3.11         | 2.94         | 2.80          | 2.68          | 2.58          | 2.50          | 2.42          |  |
| 7.4                             | 104.18 | 3.58        | 3.18         | 3.01         | 2.87          | 2.75          | 2.65          | 2.56          | 2.48          |  |
| 7.5                             | 105.59 | 3.66        | 3.26         | 3.09         | 2.94          | 2.82          | 2.71          | 2.62          | 2.54          |  |
| 7.6                             | 107.00 | 3.75        | 3.34         | 3.16         | 3.01          | 2.89          | 2.78          | 2.68          | 2.60          |  |
| 7.7                             | 108.41 | 3.84        | 3.42         | 3.23         | 3.08          | 2.96          | 2.85          | 2.75          | 2.66          |  |
| 7.8                             | 109.81 | 3.93        | 3.50         | 3.31         | 3.16          | 3.03          | 2.91          | 2.81          | 2.73          |  |
| 7.9                             | 111.22 | 4.02        | 3.58         | 3.39         | 3.23          | 3.10          | 2.98          | 2.88          | 2.79          |  |
| 8.0                             | 112.63 | 4.11        | 3.66         | 3.47         | 3.30          | 3.17          | 3.05          | 2.95          | 2.85          |  |
| 8.1                             | 114.04 | 4.20        | 3.75         | 3.54         | 3.38          | 3.24          | 3.12          | 3.01          | 2.92          |  |
| 8.2                             | 115.44 | 4.30        | 3.83         | 3.62         | 3.45          | 3.31          | 3.19          | 3.08          | 2.99          |  |
| 8.3                             | 116.85 | 4.39        | 3.91         | 3.70         | 3.53          | 3.39          | 3.26          | 3.15          | 3.05          |  |
| 8.4                             | 118.26 | 4.48        | 4.00         | 3.78         | 3.61          | 3.46          | 3.33          | 3.22          | 3.12          |  |
| 8.5                             | 119.67 | 4.58        | 4.08         | 3.87         | 3.69          | 3.54          | 3.41          | 3.29          | 3.19          |  |
| 8.6                             | 121.08 | 4.68        | 4.17         | 3.95         | 3.77          | 3.61          | 3.48          | 3.36          | 3.26          |  |
| 8.7                             | 122.48 | 4.77        | 4.26         | 4.03         | 3.85          | 3.69          | 3.55          | 3.43          | 3.33          |  |
| 8.8                             | 123.89 | 4.87        | 4.35         | 4.12         | 3.93          | 3.76          | 3.63          | 3.50          | 3.40          |  |
| 8.9                             | 125.30 | 4.97        | 4.44         | 4.20         | 4.01          | 3.84          | 3.70          | 3.58          | 3.47          |  |
| 9.0                             | 126.71 | 5.07        | 4.53         | 4.29         | 4.09          | 3.92          | 3.78          | 3.65          | 3.54          |  |
| 9.1                             | 128.12 | 5.17        | 4.62         | 4.37         | 4.17          | 4.00          | 3.85          | 3.72          | 3.61          |  |
| 9.2                             | 129.52 | 5.28        | 4.71         | 4.46         | 4.25          | 4.08          | 3.93          | 3.80          | 3.68          |  |
| 9.3                             | 130.93 | 5.38        | 4.80         | 4.55         | 4.34          | 4.16          | 4.01          | 3.88          | 3.76          |  |
| 9.4                             | 132.34 | 5.48        | 4.90         | 4.64         | 4.42          | 4.24          | 4.09          | 3.95          | 3.83          |  |
| 9.5                             | 133.75 | 5.59        | 4.99         | 4.73         | 4.51          | 4.33          | 4.17          | 4.03          | 3.90          |  |
| 9.6                             | 135.15 | 5.69        | 5.09         | 4.82         | 4.60          | 4.41          | 4.25          | 4.11          | 3.98          |  |
| 9.7                             | 136.56 | 5.80        | 5.18         | 4.91         | 4.68          | 4.49          | 4.33          | 4.18          | 4.05          |  |
| 9.8                             | 137.97 | 5.91        | 5.28         | 5.00         | 4.77          | 4.58          | 4.41          | 4.26          | 4.13          |  |
| 9.9                             | 139.38 | 6.02        | 5.38         | 5.09         | 4.86          | 4.66          | 4.49          | 4.34          | 4.21          |  |
| 10.0                            | 140.79 | 6.13        | 5.47         | 5.18         | 4.95          | 4.75          | 4.57          | 4.42          | 4.29          |  |
| 10.1                            | 142.19 | 6.24        | 5.57         | 5.28         | 5.04          | 4.83          | 4.66          | 4.50          | 4.36          |  |
| 10.2                            | 143.60 | 6.35        | 5.67         | 5.37         | 5.13          | 4.92          | 4.74          | 4.58          | 4.44          |  |
| 10.3                            | 145.01 | 6.46        | 5.77         | 5.47         | 5.22          | 5.01          | 4.83          | 4.67          | 4.52          |  |
| 10.4                            | 146.42 | 6.57        | 5.87         | 5.57         | 5.31          | 5.10          | 4.91          | 4.75          | 4.60          |  |
| 10.5                            | 147.83 | 6.69        | 5.98         | 5.66         | 5.40          | 5.19          | 5.00          | 4.83          | 4.68          |  |
| 10.6                            | 149.23 | 6.80        | 6.08         | 5.76         | 5.50          | 5.28          | 5.09          | 4.92          | 4.77          |  |
| 10.7                            | 150.64 | 6.92        | 6.18         | 5.86         | 5.59          | 5.37          | 5.17          | 5.00          | 4.85          |  |
| 10.8                            | 152.05 | 7.03        | 6.29         | 5.96         | 5.69          | 5.46          | 5.26          | 5.09          | 4.93          |  |
| 10.9                            | 153.46 | 7.15        | 6.39         | 6.06         | 5.78          | 5.55          | 5.35          | 5.17          | 5.02          |  |
| 11.0                            | 154.86 | 7.27        | 6.50         | 6.16         | 5.88          | 5.64          | 5.44          | 5.26          | 5.10          |  |
| 11.1                            | 156.27 | 7.39        | 6.61         | 6.26         | 5.98          | 5.74          | 5.53          | 5.35          | 5.18          |  |
| 11.2                            | 157.68 | 7.51        | 6.71         | 6.36         | 6.08          | 5.83          | 5.62          | 5.44          | 5.27          |  |
| 11.3                            | 159.09 | 7.63        | 6.82         | 6.47         | 6.17          | 5.93          | 5.71          | 5.53          | 5.36          |  |
| 11.4                            | 160.50 | 7.75        | 6.93         | 6.57         | 6.27          | 6.02          | 5.81          | 5.61          | 5.44          |  |
| 11.5                            | 161.90 | 7.87        | 7.04         | 6.68         | 6.37          | 6.12          | 5.90          | 5.70          | 5.53          |  |
| 11.6                            | 163.31 | 7.99        | 7.15         | 6.78         | 6.47          | 6.22          | 5.99          | 5.80          | 5.62          |  |
| 11.7                            | 164.72 | 8.12        | 7.26         | 6.89         | 6.58          | 6.31          | 6.09          | 5.89          | 5.71          |  |
| 11.8                            | 166.13 | 8.24        | 7.38         | 6.99         | 6.68          | 6.41          | 6.18          | 5.98          | 5.80          |  |
| 11.9                            | 167.54 | 8.37        | 7.49         | 7.10         | 6.78          | 6.51          | 6.28          | 6.07          | 5.89          |  |
| 12.0                            | 168.94 | 8.50        | 7.60         | 7.21         | 6.89          | 6.61          | 6.37          | 6.17          | 5.98          |  |

## Appendix C: Fitting equivalent length

### Equivalent length of fittings

This section provides the equivalent length of piping pressure loss for several ProPEX fittings. The equivalent length is used to approximate the impact the fittings have on pressure loss across the piping length. The equivalent length for each fitting is shown in the tables below. Add the equivalent length to the total piping length for each fitting installed along the piping run. The total pressure loss is then computed from the adjusted total piping length. Equivalent

lengths are commonly utilized to calculate the Total Developed Length (TDL) along a critical piping path. All Uponor values represent pressure loss at 8 ft./sec.

Many methods exist for calculating the coefficient of velocity ( $C_v$ ) across valves and fittings. The proceeding set of Uponor data was derived from empirical testing performed by NSF International and tested to ISA-S75.02 *Pressure Drop Measurement and  $C_v$  Calculations* at a measured and verified flow rate. In order to calculate equivalent length in feet, a quadratic equation is

utilized to determine pressure drop versus flow data at precisely 8 ft./sec.

Other common methods for calculating  $C_v$  include UL 1821 *Thermoplastic Sprinkler Pipe and Fittings for Fire Protection* and the use of flow modeling software. Through extensive testing and validation by NSF International, Uponor has built a complete and accurate data set for AquaPEX plumbing systems. When comparing equivalent length data across PEX fitting manufacturers, values may differ due to different testing methods and reported values at specific flow velocities other than 8 ft./sec.

For comparison purposes, NSF International tested commonly available ASTM F1807 *Brass Insert Fittings Utilizing Copper Crimp Ring for PEX Tubing Fittings* and ASTM F2159 *Plastic Insert Fittings Utilizing Copper Crimp Rings for PEX Tubing Fittings* to the ISA-S75.02 test method using the same quadratic equation as the Uponor ProPEX fittings to determine pressure drop versus flow data at precisely 8 ft./sec. Reference **Table C-1** for equivalent length comparisons.

| Fittings   | Nominal size (in.) | ASTM F1960               | ASTM F1807                  | ASTM F2159                    | F1960 vs. F1807 | F1960 vs. F2159 |
|------------|--------------------|--------------------------|-----------------------------|-------------------------------|-----------------|-----------------|
|            |                    | Uponor ProPEX eq. length | Brass crimp ring eq. length | Plastic crimp ring eq. length |                 |                 |
| Tee run    | ½                  | 1                        | 3.19                        | 6.03                          | 219.00%         | 503.00%         |
|            | ¾                  | 1.5                      | 2.57                        | 6.12                          | 71.33%          | 308.00%         |
|            | 1                  | 1.3                      | 2.49                        | 6.26                          | 91.54%          | 381.54%         |
| Tee branch | ½                  | 6.3                      | 9.05                        | 15.34                         | 43.65%          | 143.49%         |
|            | ¾                  | 15.6                     | 10.16                       | 17.04                         | -34.87%         | 9.23%           |
|            | 1                  | 12.7                     | 11.87                       | 20.17                         | -6.54%          | 58.82%          |
| Elbow      | ½                  | 10.4                     | 9.11                        | 13.53                         | -12.40%         | 30.10%          |
|            | ¾                  | 10.8                     | 10.47                       | 16.21                         | -3.06%          | 50.09%          |
|            | 1                  | 11.5                     | 10.14                       | 17.05                         | -11.83%         | 48.26%          |
| Coupling   | ½                  | 0.8                      | 2.03                        | 6.55                          | 153.75%         | 718.75%         |
|            | ¾                  | 0.9                      | 2.18                        | 5.64                          | 142.22%         | 526.67%         |
|            | 1                  | 0.9                      | 1.49                        | 4.97                          | 65.56%          | 452.22%         |

Table C-1: Equivalent length comparison of various PEX fitting types



## Fitting equivalent length and $C_v$ data

| EP tees               | Flow/port | Avg. $C_v$ | Eq. length (ft) |
|-----------------------|-----------|------------|-----------------|
| 1/2 x 1/2 x 1/2       | Through   | 7.7        | 1.0             |
|                       | Branch    | 3.4        | 6.3             |
| 3/4 x 3/4 x 3/4       | Through   | 15.7       | 1.5             |
|                       | Branch    | 5.4        | 15.6            |
| 1 x 1 x 1             | Through   | 30.5       | 1.3             |
|                       | Branch    | 11.3       | 12.7            |
| 1 1/4 x 1 1/4 x 1 1/4 | Through   | 34.0       | 3.8             |
|                       | Branch    | 23.9       | 8.6             |
| 1 1/2 x 1 1/2 x 1 1/2 | Through   | 63.7       | 1.8             |
|                       | Branch    | 31.0       | 10.6            |
| 2 x 2 x 2             | Through   | 150.7      | 0.8             |
|                       | Branch    | 52.5       | 15.5            |
| 2 1/2 x 2 1/2 x 2 1/2 | Through   | 197.2      | 2.7             |
|                       | Branch    | 81.5       | 22.3            |
| 3 x 3 x 3             | Through   | 286.6      | 2.8             |
|                       | Branch    | 122.8      | 23.9            |

| EP reducing tees | Flow/port | Avg. $C_v$ | Eq. length (ft) |
|------------------|-----------|------------|-----------------|
| 1/2 x 1/2 x 3/4  | Through   | 3.8        | 4.1             |
|                  | Branch    | 3.8        | 4.1             |
| 3/4 x 1/2 x 1/2  | Through   | 4.6        | 3.5             |
|                  | Branch    | 3.4        | 6.4             |
| 3/4 x 1/2 x 3/4  | Through   | 5.4        | 2.3             |
|                  | Branch    | 5.4        | 16.1            |
| 3/4 x 3/4 x 1/2  | Through   | 14.2       | 2.0             |
|                  | Branch    | 3.1        | 7.6             |
| 3/4 x 3/4 x 1    | Through   | 8.7        | 5.7             |
|                  | Branch    | 8.7        | 5.7             |
| 1 x 3/4 x 3/4    | Through   | 12.8       | 2.4             |
|                  | Branch    | 5.3        | 16.7            |
| 1 x 3/4 x 1      | Through   | 12.9       | 2.4             |
|                  | Branch    | 10.5       | 15.1            |
| 1 x 1 x 1/2      | Through   | 32.2       | 1.2             |
|                  | Branch    | 3.4        | 6.5             |
| 1 x 1 x 3/4      | Through   | 27.8       | 1.7             |
|                  | Branch    | 8.2        | 6.4             |
| 1 1/4 x 1 x 3/4  | Through   | 21.0       | 3.4             |
|                  | Branch    | 9.3        | 5.2             |
| 1 1/4 x 1 x 1    | Through   | 11.7       | 11.0            |
|                  | Branch    | 8.4        | 23.0            |

| EP reducing tees      | Flow/port | Avg. $C_v$ | Eq. length (ft) |
|-----------------------|-----------|------------|-----------------|
| 1 1/4 x 1 1/4 x 1/2   | Through   | 45.2       | 1.9             |
|                       | Branch    | 4.1        | 3.9             |
| 1 1/4 x 1 1/4 x 3/4   | Through   | 43.4       | 2.3             |
|                       | Branch    | 8.9        | 5.7             |
| 1 1/4 x 1 1/4 x 1     | Through   | 33.0       | 4.2             |
|                       | Branch    | 15.8       | 6.3             |
| 1 1/2 x 1 x 3/4       | Through   | 19.5       | 4.0             |
|                       | Branch    | 9.3        | 5.1             |
| 1 1/2 x 1 x 1         | Through   | 18.9       | 4.3             |
|                       | Branch    | 15.6       | 6.5             |
| 1 1/2 x 1 x 1 1/2     | Through   | 19.1       | 4.2             |
|                       | Branch    | 26.5       | 14.9            |
| 1 1/2 x 1 1/4 x 3/4   | Through   | 33.1       | 4.2             |
|                       | Branch    | 6.3        | 11.3            |
| 1 1/2 x 1 1/4 x 1     | Through   | 36.4       | 3.1             |
|                       | Branch    | 11.2       | 13.1            |
| 1 1/2 x 1 1/4 x 1 1/4 | Through   | 45.4       | 2.0             |
|                       | Branch    | 17.0       | 17.7            |
| 1 1/2 x 1 1/2 x 1/2   | Through   | 60.5       | 2.4             |
|                       | Branch    | 3.4        | 6.3             |
| 1 1/2 x 1 1/2 x 3/4   | Through   | 56.0       | 2.9             |
|                       | Branch    | 9.0        | 5.4             |
| 1 1/2 x 1 1/2 x 1     | Through   | 53.8       | 3.1             |
|                       | Branch    | 15.3       | 6.9             |
| 1 1/2 x 1 1/2 x 1 1/4 | Through   | 54.3       | 3.2             |
|                       | Branch    | 33.7       | 4.1             |
| 2 x 1 1/2 x 3/4       | Through   | 43.5       | 4.9             |
|                       | Branch    | 8.4        | 6.2             |
| 2 x 1 1/2 x 1         | Through   | 42.4       | 5.5             |
|                       | Branch    | 13.9       | 8.4             |
| 2 x 1 1/2 x 1 1/4     | Through   | 41.8       | 5.6             |
|                       | Branch    | 22.0       | 10.3            |
| 2 x 1 1/2 x 1 1/2     | Through   | 42.1       | 5.4             |
|                       | Branch    | 28.5       | 13.0            |
| 2 x 1 1/2 x 2         | Through   | 38.6       | 6.6             |
|                       | Branch    | 51.8       | 16.1            |
| 2 x 2 x 1/2           | Through   | 111.1      | 2.7             |
|                       | Branch    | 4.3        | 4.0             |
| 2 x 2 x 3/4           | Through   | 115.0      | 2.7             |
|                       | Branch    | 8.2        | 6.8             |

**EP reducing tees**  
(continued)



| EP reducing tees | Flow path | Avg. $C_v$ | Eq. length (ft) |
|------------------|-----------|------------|-----------------|
| 2 x 2 x 1        | Through   | 119.7      | 2.4             |
|                  | Branch    | 13.8       | 8.5             |
| 2 x 2 x 1¼       | Through   | 107.0      | 3.1             |
|                  | Branch    | 23.6       | 8.8             |
| 2 x 2 x 1½       | Through   | 115.8      | 2.5             |
|                  | Branch    | 29.9       | 11.7            |
| 2½ x 2 x 1½      | Through   | 80.4       | 5.9             |
|                  | Branch    | 30.2       | 11.2            |
| 2½ x 2 x 2       | Through   | 79.5       | 5.7             |
|                  | Branch    | 51.8       | 16.0            |
| 2½ x 2½ x ¾      | Through   | 209.6      | 2.0             |
|                  | Branch    | 8.5        | 6.0             |
| 2½ x 2½ x 1      | Through   | 202.0      | 2.4             |
|                  | Branch    | 17.5       | 5.0             |
| 2½ x 2½ x 1¼     | Through   | 198.8      | 2.5             |
|                  | Branch    | 22.4       | 9.7             |
| 2½ x 2½ x 1½     | Through   | 200.0      | 2.5             |
|                  | Branch    | 29.8       | 11.5            |
| 2½ x 2½ x 2      | Through   | 193.2      | 2.7             |
|                  | Branch    | 53.6       | 14.7            |
| 3 x 2 x 2        | Through   | 69.9       | 8.1             |
|                  | Branch    | 52.8       | 15.3            |
| 3 x 2½ x 1½      | Through   | 132.5      | 7.5             |
|                  | Branch    | 29.2       | 12.0            |
| 3 x 2½ x 2       | Through   | 133.2      | 7.4             |
|                  | Branch    | 51.7       | 16.4            |
| 3 x 3 x ¾        | Through   | 294.9      | 2.7             |
|                  | Branch    | 8.5        | 6.0             |
| 3 x 3 x 1        | Through   | 291.4      | 2.8             |
|                  | Branch    | 14.8       | 7.3             |
| 3 x 3 x 1¼       | Through   | 290.4      | 3.0             |
|                  | Branch    | 22.8       | 9.3             |
| 3 x 3 x 1½       | Through   | 290.5      | 2.9             |
|                  | Branch    | 29.9       | 11.3            |
| 3 x 3 x 2        | Through   | 287.6      | 3.0             |
|                  | Branch    | 53.8       | 14.6            |
| 3 x 3 x 2½       | Through   | 288.3      | 3.0             |
|                  | Branch    | 82.2       | 22.2            |

### EP coupling



| Nominal size (in) | Flow path | Avg. C <sub>v</sub> | Eq. length (ft) |
|-------------------|-----------|---------------------|-----------------|
| ½ x ½             | Through   | 8.3                 | 0.8             |
| ¾ x ½             | Through   | 5.2                 | 2.6             |
| ¾ x ¾             | Through   | 19.0                | 0.9             |
| 1 x ¾             | Through   | 12.5                | 2.7             |
| 1 x 1             | Through   | 33.8                | 0.9             |
| 1¼ x ¾            | Through   | 10.9                | 3.6             |
| 1¼ x 1            | Through   | 22.3                | 2.6             |
| 1¼ x 1¼           | Through   | 53.3                | 1.1             |
| 1½ x ¾            | Through   | 10.8                | 3.5             |
| 1½ x 1            | Through   | 19.0                | 4.3             |
| 1½ x 1¼           | Through   | 33.9                | 3.7             |
| 1½ x 1½           | Through   | 69.5                | 1.4             |
| 2 x 1½            | Through   | 45.2                | 4.6             |
| 2 x 2             | Through   | 107.8               | 2.7             |
| 2½ x 1¼           | Through   | 29.3                | 5.4             |
| 2½ x 1½           | Through   | 35.9                | 7.5             |
| 2½ x 2            | Through   | 82.6                | 5.4             |
| 2½ x 2½           | Through   | 219.1               | 1.7             |
| 3 x 2             | Through   | 73.4                | 7.2             |
| 3 x 2½            | Through   | 136.2               | 7.1             |
| 3 x 3             | Through   | 320.6               | 1.9             |

### 45° elbow



| Nominal size (in) | Flow path | Avg. C <sub>v</sub> | Eq. length (ft) |
|-------------------|-----------|---------------------|-----------------|
| 1½ x 1½           | Through   | 33.1                | 9.3             |
| 2 x 2             | Through   | 68.9                | 8.8             |
| 2½ x 2½           | Through   | 136.8               | 6.9             |
| 3 x 3             | Through   | 195.5               | 8.3             |

### 90° elbow



| Nominal size (in) | Flow path | Avg. C <sub>v</sub> | Eq. length (ft) |
|-------------------|-----------|---------------------|-----------------|
| ½ x ½             | Through   | 2.6                 | 10.4            |
| ¾ x ¾             | Through   | 6.7                 | 10.8            |
| 1 x 1             | Through   | 11.9                | 11.5            |
| 1¼ x 1¼           | Through   | 22.2                | 10.0            |
| 1½ x 1½           | Through   | 29.7                | 11.5            |
| 2 x 2             | Through   | 50.2                | 17.1            |
| 2½ x 2½           | Through   | 86.0                | 20.0            |
| 3 x 3             | Through   | 125.0               | 23.2            |

## Elbows



| EP multiport elbows  | Flow/port | Avg. C <sub>v</sub> | Eq. length (ft) |
|--|-----------|---------------------|-----------------|
| EP flow-through multiport elbow, 3 outlets, ¾" x ¾" ProPEX   | Through   | 7.1                 | 8.8             |
|  | #2        | 3.4                 | 6.3             |
| EP flow-through multiport elbow, 4 outlets, ¾" x ¾" ProPEX   | Through   | 7.1                 | 8.9             |
|  | #3        | 3.4                 | 6.4             |
| 1" EP branch multiport elbow, 10 outlets with mounting clips | #5        | 3.0                 | 7.9             |

## Flow-through



| EP flow-through multiport tees                                | Flow/port | Avg. C <sub>v</sub> | Eq. length (ft) |
|---|-----------|---------------------|-----------------|
| EP flow-through multiport tee, 2 outlets, ¾" x ¾" ProPEX      | Through   | 15.3                | 1.6             |
|   | #2        | 3.4                 | 6.4             |
| EP flow-through multiport tee, 3 (1") outlets, 2" x 2" ProPEX | Through   | 99.0                | 3.9             |
|   | #2        | 13.4                | 9.0             |
| EP flow-through multiport tee, 3 outlets, 1" x ¾" PEX         | Through   | 11.6                | 3.2             |
|   | #2        | 3.7                 | 5.4             |
| EP flow-through multiport tee, 3 outlets, ¾" x ¾" ProPEX      | Through   | 7.1                 | 8.8             |
|   | #2        | 3.4                 | 6.3             |
| EP flow-through multiport tee, 3 (¾") outlets, 1¼" x 1¼" PEX  | Through   | 45.9                | 7.9             |
|   | #2        | 1.8                 | 7.1             |
| EP flow-through multiport tee, 4 outlets, ¾" x ¾" ProPEX      | Through   | 7.1                 | 8.9             |
|   | #3        | 3.4                 | 6.4             |
| EP flow-through multiport tee, 4 outlets, 1" x 1" PEX         | Through   | 29.3                | 1.5             |
|   | #3        | 3.2                 | 7.5             |
| EP flow-through multiport tee, 4 outlets, 1" x ¾" ProPEX      | Through   | 11.7                | 3.0             |
|   | #3        | 4.0                 | 4.5             |
| EP flow-through multiport tee, 6 outlets, 1" x ¾" ProPEX      | Through   | 11.8                | 3.1             |
|   | #3        | 3.5                 | 5.8             |
| EP flow-through multiport tee, 6 outlets, ¾" x ¾" ProPEX      | Through   | 13.2                | 3.8             |
|   | #3        | 3.7                 | 5.3             |
| EP flow-through multiport tee, 6 outlets, 1" x 1" ProPEX      | Through   | 25.1                | 2.5             |
|   | #3        | 3.1                 | 7.6             |

## Vertical



| EP Flow-through multiport vertical tee                                 | Flow/port   | Avg. C <sub>v</sub> | Eq. length (ft) |
|--|-------------|---------------------|-----------------|
| EP flow-through multiport vertical tee, 3 outlets, ¾" x ¾" x ¾" ProPEX | Tee to tee  | 13.6                | 2.3             |
|  | Tee to side | 7.4                 | 8.2             |
|  | Tee to #2   | 3.1                 | 7.8             |
|  | Side to tee | 6.9                 | 9.5             |
|  | Side to #2  | 3.6                 | 4.9             |

## Branch



| EP branch multiport tees                                    | Flow/port | Avg. C <sub>v</sub> | Eq. length (ft) |
|---|-----------|---------------------|-----------------|
| 3/4" EP branch multiport tee, 3 outlets                     | #2        | 3.4                 | 6.0             |
| 1 1/4" EP branch multiport tee, 3 (3/4") outlets            | #2        | 7.9                 | 7.1             |
| 1" EP branch multiport tee, 4 outlets                       | #3        | 4.2                 | 3.9             |
| 3/4" EP branch multiport tee, 4 outlets                     | #3        | 3.3                 | 6.7             |
| 1" EP branch multiport tee, 6 outlets                       | #3        | 3.6                 | 5.4             |
| 3/4" EP branch multiport tee, 6 outlets                     | #3        | 4.1                 | 3.8             |
| 3/4" EP branch multiport tee, 7 outlets with mounting clips | #4        | 2.6                 | 10.6            |
| 1" EP branch multiport tee, 7 outlets with mounting clips   | #4        | 2.6                 | 10.7            |
| 3/4" EP branch multiport tee, 8 outlets with mounting clips | #4        | 2.6                 | 10.9            |
| 1" EP branch multiport tee, 8 outlets with mounting clips   | #4        | 3.2                 | 6.1             |

## Opposing



| EP opposing-port multiport tees  | Flow/port | Avg. C <sub>v</sub> | Eq. length (ft) |
|--|-----------|---------------------|-----------------|
| 3/4" EP branch opposing-port multiport tee, 3 outlets                      | #2        | 3.3                 | 6.5             |
| EP flow-through opposing-port multiport tee, 3 outlets, 3/4" x 3/4" ProPEX | Through   | 15.9                | 1.6             |
|  | #3        | 3.4                 | 6.4             |
| 3/4" EP branch opposing-port multiport tee, 4 outlets                      | #3        | 3.5                 | 6.0             |
| EP flow-through opposing-port multiport tee, 4 outlets, 3/4" x 3/4" ProPEX | Through   | 16.9                | 1.3             |
|  | #3        | 3.4                 | 6.3             |
| EP flow-through opposing-port multiport tee, 6 outlets, 3/4" x 3/4" ProPEX | Through   | 16.4                | 1.3             |
|  | #3        | 3.4                 | 6.2             |
| 3/4" EP branch opposing-port multiport tee, 8 outlets                      | #4        | 3.4                 | 6.0             |



### Sweat adapters



| Nominal size (in)  | Flow path | Avg. C <sub>v</sub> | Eq. length (ft) |
|--------------------|-----------|---------------------|-----------------|
| ½ PEX x ½ copper   | Through   | 5.7                 | 2.0             |
| ½ PEX x ¾ copper   | Through   | 5.1                 | 2.7             |
| ¾ PEX x ½ copper   | Through   | 8.8                 | 1.4             |
| ¾ PEX x ¾ copper   | Through   | 13.4                | 2.1             |
| ¾ PEX x 1 copper   | Through   | 10.9                | 3.7             |
| 1 PEX x 1 copper   | Through   | 22.1                | 2.4             |
| 1¼ PEX x 1¼ copper | Through   | 34.0                | 3.9             |
| 1½ PEX x 1½ copper | Through   | 45.5                | 4.3             |
| 2 PEX x 2 copper   | Through   | 83.6                | 5.3             |
| 2½ PEX x 2½ copper | Through   | 136.2               | 6.9             |
| 3 PEX x 3 copper   | Through   | 189.1               | 8.8             |

### Fitting adapters



| Nominal size (in)  | Flow path | Avg. C <sub>v</sub> | Eq. length (ft) |
|--------------------|-----------|---------------------|-----------------|
| ½ PEX x ½ copper   | Through   | 7.7                 | 1.0             |
| ½ PEX x ¾ copper   | Cu to PEX | 5.6                 | 2.2             |
| ¾ PEX x ½ copper   | PEX to Cu | 8.8                 | 1.5             |
| ¾ PEX x ¾ copper   | Through   | 15.7                | 1.5             |
| ¾ PEX x 1 copper   | Cu to PEX | 11.4                | 3.1             |
| 1 PEX x 1 copper   | Through   | 30.5                | 1.3             |
| 1¼ PEX x 1¼ copper | Through   | 34.0                | 3.8             |
| 1½ PEX x 1½ copper | Through   | 63.7                | 1.8             |
| 2 PEX x 2 copper   | Through   | 150.7               | 0.8             |

### Male adapters



| Nominal size (in) | Flow path  | Avg. C <sub>v</sub> | Eq. length (ft) |
|-------------------|------------|---------------------|-----------------|
| ½ PEX x ½ MNPT    | Through    | 5.0                 | 2.3             |
| ½ PEX x ¾ MNPT    | NPT to PEX | 6.2                 | 1.8             |
| ¾ PEX x ¾ MNPT    | Through    | 11.3                | 2.7             |
| ¾ PEX x 1 MNPT    | NPT to PEX | 10.9                | 3.4             |
| 1 PEX x ¾ MNPT    | PEX to NPT | 17.8                | 1.2             |
| 1 PEX x 1 MNPT    | Through    | 19.9                | 3.2             |
| 1¼ PEX x 1¼ MNPT  | Through    | 32.4                | 4.2             |
| 1½ PEX x 1½ MNPT  | Through    | 39.3                | 5.5             |
| 2 PEX x 2 MNPT    | Through    | 78.6                | 5.6             |
| 2½ PEX x 2½ MNPT  | Through    | 227.3               | 1.5             |
| 3 PEX x 3 MNPT    | Through    | 187.5               | 9.1             |

### Female adapters



| Nominal size (in) | Flow path  | Avg. $C_v$ | Eq. length (ft) |
|-------------------|------------|------------|-----------------|
| ½ PEX x ½ FNPT    | Through    | 4.8        | 2.5             |
| ½ PEX x ¾ FNPT    | NPT to PEX | 5.1        | 2.7             |
| ¾ PEX x ¾ FNPT    | Through    | 12.0       | 2.3             |
| ¾ PEX x 1 FNPT    | NPT to PEX | 10.8       | 3.6             |
| 1 PEX x 1 FNPT    | Through    | 19.7       | 3.8             |
| 1¼ PEX x 1¼ FNPT  | Through    | 30.8       | 4.8             |
| 1½ PEX x 1½ FNPT  | Through    | 40.9       | 5.1             |
| 2 PEX x 2 FNPT    | Through    | 77.7       | 5.7             |

### CPVC adapters



| Nominal size (in)       | Flow path   | Avg. $C_v$ | Eq. length (ft) |
|-------------------------|-------------|------------|-----------------|
| 1¼ PEX x 1¼ CPVC spigot | CVPC to PEX | 42.6       | 2.1             |
| 1¼ PEX x 1¼ CPVC socket | CVPC to PEX | 43.3       | 2.0             |
| 1½ PEX x 1½ CPVC spigot | CVPC to PEX | 55.7       | 2.6             |
| 1½ PEX x 1½ CPVC socket | CVPC to PEX | 54.1       | 2.8             |
| 2 PEX x 2 CPVC spigot   | CVPC to PEX | 110.2      | 2.5             |
| 2 PEX x 2 CPVC socket   | CVPC to PEX | 112.6      | 2.4             |

### Groove adapters



| Nominal size (in)      | Avg. $C_v^1$ | Eq. Length (ft) <sup>1</sup> | Avg. $C_v^2$ | Eq. Length (ft) <sup>2</sup> |
|------------------------|--------------|------------------------------|--------------|------------------------------|
| 2 PEX x 2 CTS groove   | 86.1         | 4.9                          | 141.4        | 1.0                          |
| 2 PEX x 2 IPS groove   | 79.7         | 5.9                          | 114.5        | 2.3                          |
| 2 PEX x 2½ CTS groove  | 73.2         | 7.3                          | 128.3        | 1.6                          |
| 2 PEX x 2½ IPS groove  | 71.6         | 7.6                          | 124.0        | 1.7                          |
| 2½ PEX x 2 IPS groove  | 195.6        | 2.3                          | 239.5        | 1.2                          |
| 2½ PEX x 2½ CTS groove | 138.7        | 6.5                          | 222.7        | 1.5                          |
| 2½ PEX x 2½ IPS groove | 130.2        | 7.6                          | 202.0        | 2.4                          |
| 2½ PEX x 3 IPS groove  | 114.9        | 10.2                         | 199.8        | 2.4                          |
| 3 PEX x 2½ IPS groove  | 250.7        | 4.2                          | 334.4        | 1.4                          |
| 3 PEX x 3 CTS groove   | 192.3        | 8.3                          | 338.3        | 1.6                          |
| 3 PEX x 3 IPS groove   | 177.4        | 10.0                         | 282.4        | 2.8                          |

<sup>1</sup>Copper-to-PEX flow  
<sup>2</sup>PEX-to-copper flow

**Flange adapters**


| Nominal size (in) | Flow path | Avg. C <sub>v</sub> | Eq. length (ft) |
|-------------------|-----------|---------------------|-----------------|
| 2½ PEX x flange   | Through   | 131.5               | 7.6             |
| 3 PEX x flange    | Through   | 310.7               | 2.2             |

**ProPEX LF brass commercial ball valve (full port)**


| Nominal size (in) | Avg. C <sub>v</sub> | Equivalent length (ft) |
|-------------------|---------------------|------------------------|
| ½ PEX x ½ PEX     | 7.0                 | 2.8                    |
| ¾ PEX x ¾ PEX     | 18.7                | 3.3                    |
| 1 PEX x 1 PEX     | 29.0                | 4.3                    |
| 1¼ PEX x 1¼ PEX   | 54.7                | 4.8                    |
| 1½ PEX x 1½ PEX   | 68.2                | 5.7                    |
| 2 PEX x 2 PEX     | 132.2               | 7.1                    |




## Appendix D: ProPEX fitting dimensions

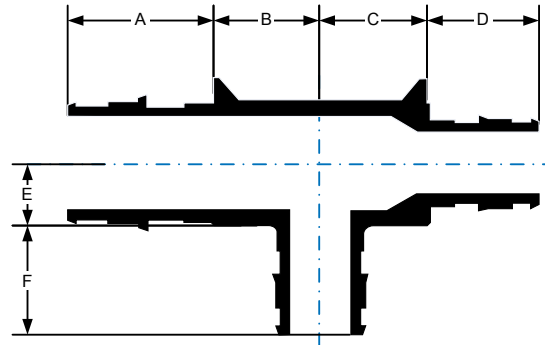


| ProPEX EP reducing tees            |          | A       | B      | C      | D      | E      | F      |
|------------------------------------|----------|---------|--------|--------|--------|--------|--------|
| Description                        | Part no. | in/mm   | in/mm  | in/mm  | in/mm  | in/mm  | in/mm  |
| 1/2" PEX x 1/2" PEX x 3/4" PEX     | Q4755575 | 3/4     | 1 1/16 | 1 1/16 | 3/4    | 1/2    | 15/16  |
|                                    |          | 18      | 18     | 18     | 18     | 13     | 24     |
| 3/4" PEX x 1/2" PEX x 1/2" PEX     | Q4757555 | 15/16   | 1 1/16 | 1 1/16 | 3/4    | 1/2    | 3/4    |
|                                    |          | 24      | 18     | 18     | 18     | 13     | 18     |
| 3/4" PEX x 1/2" PEX x 3/4" PEX     | Q4757557 | 15/16   | 1 1/16 | 1 1/16 | 3/4    | 1/2    | 15/16  |
|                                    |          | 24      | 18     | 18     | 18     | 13     | 24     |
| 3/4" PEX x 3/4" PEX x 5/8" PEX     | Q4757563 | 15/16   | 1 1/16 | 1 1/16 | 15/16  | 9/16   | 7/8    |
|                                    |          | 24      | 18     | 18     | 24     | 14     | 22     |
| 3/4" PEX x 3/4" PEX x 1/2" PEX     | Q4757550 | 15/16   | 1 1/16 | 1 1/16 | 15/16  | 9/16   | 3/4    |
|                                    |          | 24      | 18     | 18     | 24     | 14     | 18     |
| 3/4" PEX x 3/4" PEX x 1" PEX       | Q4757710 | 15/16   | 7/8    | 7/8    | 15/16  | 1 1/16 | 1 3/16 |
|                                    |          | 24      | 22     | 22     | 24     | 18     | 30     |
| 1" PEX x 3/4" PEX x 3/4" PEX       | Q4751775 | 1 3/16  | 7/8    | 7/8    | 15/16  | 1 1/16 | 15/16  |
|                                    |          | 30      | 22     | 22     | 24     | 18     | 24     |
| 1" PEX x 3/4" PEX x 1" PEX         | Q4751751 | 1 3/16  | 7/8    | 7/8    | 15/16  | 1 1/16 | 1 3/16 |
|                                    |          | 30      | 22     | 22     | 24     | 18     | 30     |
| 1" PEX x 1" PEX x 1/2" PEX         | Q4751150 | 1 3/16  | 7/8    | 7/8    | 1 3/16 | 1 1/16 | 3/4    |
|                                    |          | 30      | 22     | 22     | 30     | 18     | 18     |
| 1" PEX x 1" PEX x 3/4" PEX         | Q4751175 | 1 3/16  | 7/8    | 7/8    | 1 3/16 | 1 1/16 | 15/16  |
|                                    |          | 30      | 22     | 22     | 30     | 18     | 24     |
| 1 1/4" PEX x 1" PEX x 3/4" PEX     | Q4751317 | 1 3/16  | 15/16  | 15/16  | 1 7/16 | 15/16  | 15/16  |
|                                    |          | 30      | 25     | 25     | 37     | 24     | 24     |
| 1 1/4" PEX x 1" PEX x 1" PEX       | Q4751311 | 1 7/16  | 15/16  | 15/16  | 1 3/16 | 15/16  | 1 3/16 |
|                                    |          | 37      | 25     | 25     | 30     | 24     | 30     |
| 1 1/4" PEX x 1 1/4" PEX x 1/2" PEX | Q4751350 | 1 7/16  | 3/4    | 3/4    | 1 7/16 | 3/4    | 3/4    |
|                                    |          | 37      | 19     | 19     | 37     | 19     | 18     |
| 1 1/4" PEX x 1 1/4" PEX x 3/4" PEX | Q4751337 | 1 7/16  | 7/8    | 7/8    | 1 7/16 | 3/4"   | 15/16  |
|                                    |          | 37      | 23     | 23     | 37     | 19     | 24     |
| 1 1/4" PEX x 1 1/4" PEX x 1" PEX   | Q4751331 | 1 7/16  | 15/16  | 15/16  | 1 7/16 | 15/16  | 1 3/16 |
|                                    |          | 37      | 25     | 25     | 37     | 24     | 30     |
| 1 1/2" PEX x 1" PEX x 3/4" PEX     | Q4751517 | 1 11/16 | 1 3/16 | 1 3/16 | 1 3/16 | 1 1/8  | 15/16  |
|                                    |          | 43      | 30     | 30     | 30     | 28     | 24     |
| 1 1/2" PEX x 1" PEX x 1" PEX       | Q4751511 | 1 11/16 | 1 3/16 | 1 3/16 | 1 3/16 | 1 1/8  | 1 3/16 |
|                                    |          | 43      | 30     | 30     | 30     | 28     | 30     |
| 1 1/2" PEX x 1" PEX x 1 1/2" PEX   | Q4751505 | 1 11/16 | 1 1/4  | 1 1/4  | 1 3/16 | 15/16  | 1 1/16 |
|                                    |          | 43      | 32     | 32     | 30     | 24     | 43     |

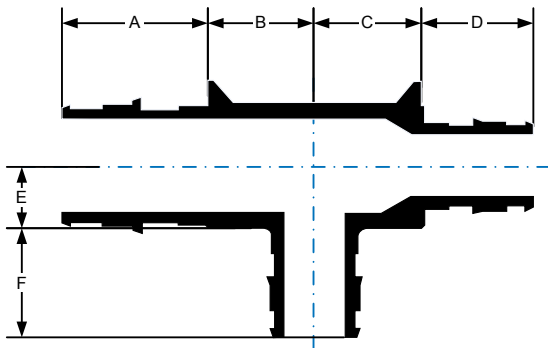

| ProPEX EP reducing tees     |          | A                               | B                              | C                              | D                               | E                              | F                               |
|-----------------------------|----------|---------------------------------|--------------------------------|--------------------------------|---------------------------------|--------------------------------|---------------------------------|
| Description                 | Part no. | in/mm                           | in/mm                          | in/mm                          | in/mm                           | in/mm                          | in/mm                           |
| 1½" PEX x 1¼" PEX x ¾" PEX  | Q4751537 | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>16</sub>  | 7 <sup>7</sup> / <sub>8</sub>  | 1 <sup>9</sup> / <sub>16</sub>  |
|                             |          | 43                              | 29                             | 29                             | 37                              | 23                             | 24                              |
| 1½" PEX x 1¼" PEX x 1" PEX  | Q4751531 | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>16</sub>  | 7 <sup>7</sup> / <sub>8</sub>  | 1 <sup>3</sup> / <sub>16</sub>  |
|                             |          | 43                              | 29                             | 29                             | 37                              | 23                             | 30                              |
| 1½" PEX x 1¼" PEX x 1¼" PEX | Q4751533 | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>16</sub>  | 7 <sup>7</sup> / <sub>8</sub>  | 1 <sup>7</sup> / <sub>16</sub>  |
|                             |          | 43                              | 29                             | 29                             | 37                              | 23                             | 37                              |
| 1½" PEX x 1½" PEX x ½" PEX  | Q4751550 | 1 <sup>11</sup> / <sub>16</sub> | ¾                              | ¾                              | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>16</sub> | ¾                               |
|                             |          | 43                              | 19                             | 19                             | 43                              | 21                             | 18                              |
| 1½" PEX x 1½" PEX x ¾" PEX  | Q4751557 | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>5</sup> / <sub>16</sub>  |
|                             |          | 43                              | 30                             | 30                             | 43                              | 28                             | 24                              |
| 1½" PEX x 1½" PEX x 1" PEX  | Q4751551 | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>3</sup> / <sub>16</sub>  |
|                             |          | 43                              | 30                             | 30                             | 43                              | 28                             | 30                              |
| 1½" PEX x 1½" PEX x 1¼" PEX | Q4751553 | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>7</sup> / <sub>16</sub>  |
|                             |          | 43                              | 30                             | 30                             | 43                              | 28                             | 37                              |
| 2" PEX x 1½" PEX x ¾" PEX   | Q4752575 | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>9</sup> / <sub>16</sub>  |
|                             |          | 55                              | 34                             | 34                             | 43                              | 33                             | 24                              |
| 2" PEX x 1½" PEX x 1" PEX   | Q4752051 | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>3</sup> / <sub>16</sub>  |
|                             |          | 55                              | 34                             | 34                             | 43                              | 33                             | 30                              |
| 2" PEX x 1½" PEX x 1¼" PEX  | Q4752053 | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>3</sup> / <sub>8</sub>  | 1 <sup>3</sup> / <sub>8</sub>  | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>7</sup> / <sub>16</sub>  |
|                             |          | 55                              | 35                             | 35                             | 43                              | 33                             | 37                              |
| 2" PEX x 1½" PEX x 1½" PEX  | Q4752055 | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>3</sup> / <sub>8</sub>  | 1 <sup>3</sup> / <sub>8</sub>  | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>11</sup> / <sub>16</sub> |
|                             |          | 55                              | 35                             | 35                             | 43                              | 33                             | 43                              |
| 2" PEX x 1½" PEX x 2" PEX   | Q4752152 | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>3</sup> / <sub>4</sub>  | 1 <sup>3</sup> / <sub>4</sub>  | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub>  | 2 <sup>3</sup> / <sub>16</sub>  |
|                             |          | 55                              | 44                             | 44                             | 43                              | 26                             | 55                              |
| 2" PEX x 2" PEX x ½" PEX    | Q4752250 | 2 <sup>3</sup> / <sub>16</sub>  | ¾                              | ¾                              | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | ¾                               |
|                             |          | 55                              | 19                             | 19                             | 55                              | 26                             | 18                              |
| 2" PEX x 2" PEX x ¾" PEX    | Q4752275 | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>5</sup> / <sub>16</sub> | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>5</sup> / <sub>16</sub>  |
|                             |          | 55                              | 34                             | 34                             | 55                              | 33                             | 24                              |
| 2" PEX x 2" PEX x 1" PEX    | Q4752210 | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>3</sup> / <sub>16</sub>  |
|                             |          | 55                              | 34                             | 34                             | 55                              | 33                             | 30                              |
| 2" PEX x 2" PEX x 1¼" PEX   | Q4752213 | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>5</sup> / <sub>16</sub> | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>7</sup> / <sub>16</sub>  |
|                             |          | 55                              | 34                             | 34                             | 55                              | 33                             | 37                              |
| 2" PEX x 2" PEX x 1½" PEX   | Q4752215 | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>5</sup> / <sub>16</sub> | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>11</sup> / <sub>16</sub> |
|                             |          | 55                              | 34                             | 34                             | 55                              | 33                             | 43                              |

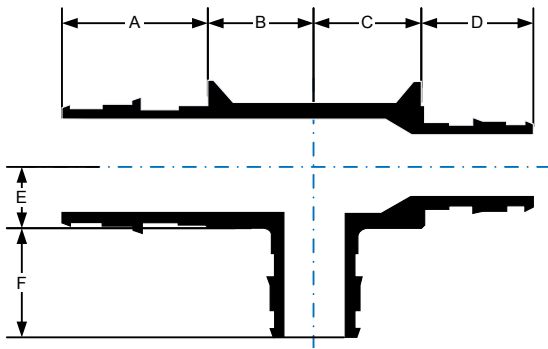


| ProPEX EP reducing tees     |          | A                               | B                             | C                             | D                               | E                              | F                               |
|-----------------------------|----------|---------------------------------|-------------------------------|-------------------------------|---------------------------------|--------------------------------|---------------------------------|
| Description                 | Part no. | in/mm                           | in/mm                         | in/mm                         | in/mm                           | in/mm                          | in/mm                           |
| 2½" PEX x 2" PEX x 1½" PEX  | Q4752525 | 2 <sup>13</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>8</sub> | 1 <sup>5</sup> / <sub>8</sub> | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub>  |
|                             |          | 72                              | 41                            | 41                            | 55                              | 33                             | 43                              |
| 2½" PEX x 2" PEX x 2" PEX   | Q4752522 | 2 <sup>13</sup> / <sub>16</sub> | 2                             | 2                             | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>5</sup> / <sub>16</sub> | 2 <sup>3</sup> / <sub>16</sub>  |
|                             |          | 72                              | 51                            | 51                            | 55                              | 33                             | 55                              |
| 2½" PEX x 2½" PEX x ¾" PEX  | Q4752557 | 2 <sup>13</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>8</sub> | 1 <sup>5</sup> / <sub>8</sub> | 2 <sup>13</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub>  |
|                             |          | 72                              | 29                            | 29                            | 72                              | 33                             | 24                              |
| 2½" PEX x 2½" PEX x 1" PEX  | Q4752510 | 2 <sup>13</sup> / <sub>16</sub> | 1¼                            | 1¼                            | 2 <sup>13</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>16</sub>  |
|                             |          | 72                              | 32                            | 32                            | 72                              | 33                             | 30                              |
| 2½" PEX x 2½" PEX x 1¼" PEX | Q4752513 | 2 <sup>13</sup> / <sub>16</sub> | 1½                            | 1½                            | 2 <sup>13</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>7</sup> / <sub>16</sub>  |
|                             |          | 72                              | 38                            | 38                            | 72                              | 33                             | 37                              |
| 2½" PEX x 2½" PEX x 1½" PEX | Q4752515 | 2 <sup>13</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>8</sub> | 1 <sup>5</sup> / <sub>8</sub> | 2 <sup>13</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub>  |
|                             |          | 72                              | 41                            | 41                            | 72                              | 33                             | 43                              |
| 2½" PEX x 2½" PEX x 2" PEX  | Q4752520 | 2 <sup>13</sup> / <sub>16</sub> | 2                             | 2                             | 2 <sup>13</sup> / <sub>16</sub> | 1¼                             | 2 <sup>3</sup> / <sub>16</sub>  |
|                             |          | 72                              | 51                            | 51                            | 72                              | 32                             | 55                              |
| 3" PEX x 2" PEX x 2" PEX    | Q4753220 | 3 <sup>3</sup> / <sub>8</sub>   | 2                             | 2                             | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>5</sup> / <sub>16</sub> | 2 <sup>3</sup> / <sub>16</sub>  |
|                             |          | 86                              | 51                            | 51                            | 55                              | 39                             | 55                              |
| 3" PEX x 2½" PEX x 1½" PEX  | Q4753215 | 3 <sup>3</sup> / <sub>8</sub>   | 1 <sup>5</sup> / <sub>8</sub> | 1 <sup>5</sup> / <sub>8</sub> | 2 <sup>13</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub>  |
|                             |          | 86                              | 41                            | 41                            | 72                              | 39                             | 43                              |
| 3" PEX x 2½" PEX x 2" PEX   | Q4753252 | 3 <sup>3</sup> / <sub>8</sub>   | 2                             | 2                             | 2 <sup>13</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> | 2 <sup>3</sup> / <sub>16</sub>  |
|                             |          | 86                              | 51                            | 51                            | 72                              | 39                             | 55                              |
| 3" PEX x 3" PEX x ¾" PEX    | Q4753375 | 3 <sup>3</sup> / <sub>8</sub>   | 1 <sup>5</sup> / <sub>8</sub> | 1 <sup>5</sup> / <sub>8</sub> | 3 <sup>3</sup> / <sub>8</sub>   | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub>  |
|                             |          | 86                              | 29                            | 29                            | 86                              | 39                             | 24                              |
| 3" PEX x 3" PEX x 1" PEX    | Q4753310 | 3 <sup>3</sup> / <sub>8</sub>   | 1¼                            | 1¼                            | 3 <sup>3</sup> / <sub>8</sub>   | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>16</sub>  |
|                             |          | 86                              | 32                            | 32                            | 86                              | 39                             | 30                              |
| 3" PEX x 3" PEX x 1¼" PEX   | Q4753313 | 3 <sup>3</sup> / <sub>8</sub>   | 1½                            | 1½                            | 3 <sup>3</sup> / <sub>8</sub>   | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>7</sup> / <sub>16</sub>  |
|                             |          | 86                              | 38                            | 38                            | 86                              | 39                             | 37                              |
| 3" PEX x 3" PEX x 1½" PEX   | Q4753315 | 3 <sup>3</sup> / <sub>8</sub>   | 1 <sup>5</sup> / <sub>8</sub> | 1 <sup>5</sup> / <sub>8</sub> | 3 <sup>3</sup> / <sub>8</sub>   | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub>  |
|                             |          | 86                              | 41                            | 41                            | 86                              | 39                             | 43                              |
| 3" PEX x 3" PEX x 2" PEX    | Q4753320 | 3 <sup>3</sup> / <sub>8</sub>   | 2                             | 2                             | 3 <sup>3</sup> / <sub>8</sub>   | 1 <sup>5</sup> / <sub>16</sub> | 2 <sup>13</sup> / <sub>16</sub> |
|                             |          | 86                              | 51                            | 51                            | 86                              | 39                             | 72                              |
| 3" PEX x 3" PEX x 2½" PEX   | Q4753325 | 3 <sup>3</sup> / <sub>8</sub>   | 2½                            | 2½                            | 3 <sup>3</sup> / <sub>8</sub>   | 1 <sup>5</sup> / <sub>16</sub> | 2 <sup>13</sup> / <sub>16</sub> |
|                             |          | 86                              | 64                            | 64                            | 86                              | 39                             | 72                              |

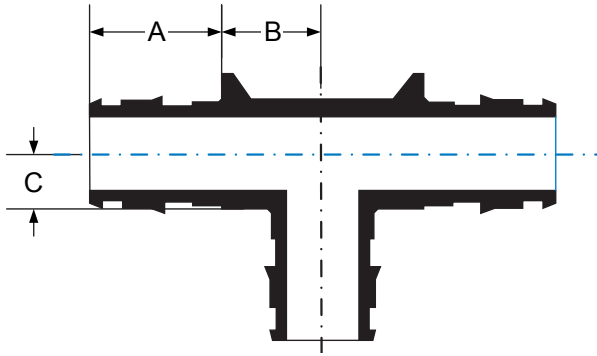


| ProPEX tees                          |           | A       | B      | C      |
|--------------------------------------|-----------|---------|--------|--------|
| Description                          | Part no.  | in/mm   | in/mm  | in/mm  |
| 1/2" PEX x 1/2" PEX x 1/2" PEX       | Q4755050  | 3/4     | 9/16   | 3/8    |
|                                      |           | 18      | 15     | 10     |
| 1/2" PEX x 1/2" PEX x 1/2" PEX       | LF4705050 | 1 1/16  | 9/16   | 5/16   |
|                                      |           | 18      | 14     | 8      |
| 3/4" PEX x 3/4" PEX x 3/4" PEX       | Q4757575  | 1 5/16  | 1 1/16 | 1/2    |
|                                      |           | 24      | 18     | 13     |
| 3/4" PEX x 3/4" PEX x 3/4" PEX       | LF4707575 | 1 5/16  | 1 1/16 | 3/8    |
|                                      |           | 24      | 18     | 10     |
| 1" PEX x 1" PEX x 1" PEX             | Q4751010  | 1 3/16  | 7/8    | 1 1/16 |
|                                      |           | 30      | 22     | 18     |
| 1" PEX x 1" PEX x 1" PEX             | LF4701010 | 1 3/16  | 7/8    | 9/16   |
|                                      |           | 30      | 22     | 14     |
| 1 1/4" PEX x 1 1/4" PEX x 1 1/4" PEX | Q4751313  | 1 7/16  | 1 5/16 | 1 5/16 |
|                                      |           | 37      | 25     | 24     |
| 1 1/2" PEX x 1 1/2" PEX x 1 1/2" PEX | Q4751515  | 1 11/16 | 1 3/16 | 1 1/8  |
|                                      |           | 43      | 30     | 28     |
| 2" PEX x 2" PEX x 2" PEX             | Q4752000  | 2 3/16  | 1 9/16 | 1 5/8  |
|                                      |           | 55      | 40     | 41     |
| 2 1/2" PEX x 2 1/2" PEX x 2 1/2" PEX | Q4752500  | 2 13/16 | 2 7/16 | 1 9/16 |
|                                      |           | 72      | 62     | 34     |
| 3" PEX x 3" PEX x 3" PEX             | Q4753000  | 3 3/8   | 2 3/4  | 1 7/16 |
|                                      |           | 86      | 70     | 37     |




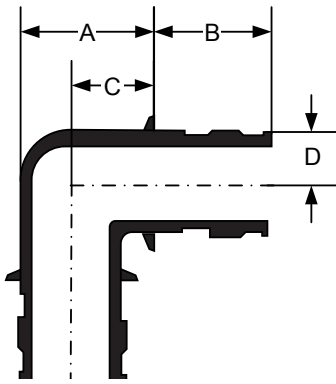

EP elbow

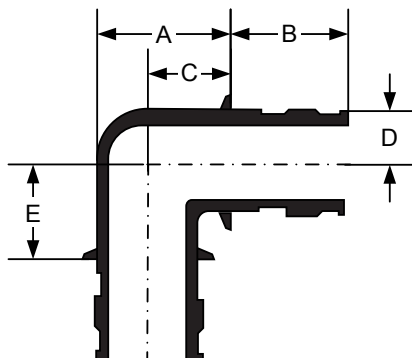


Brass elbow

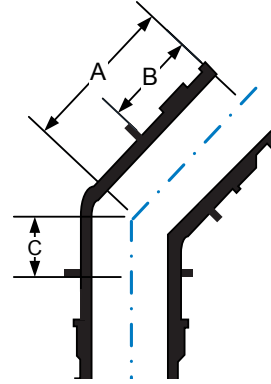


EP elbow


| ProPEX elbows               |           | A                | B                | C                | D                | E               |
|-----------------------------|-----------|------------------|------------------|------------------|------------------|-----------------|
| Description                 | Part no.  | in/mm            | in/mm            | in/mm            | in/mm            | in/mm           |
| ½" PEX x ½" PEX EP elbow    | Q4760500  | 1¼ <sub>16</sub> | ¾                | 9 <sub>16</sub>  | ¼                |                 |
|                             |           | 21               | 18               | 14               | 7                |                 |
| ¾" PEX x ¾" PEX EP elbow    | Q4760750  | 1½ <sub>16</sub> | 19 <sub>16</sub> | 1¼ <sub>16</sub> | 3 <sub>8</sub>   |                 |
|                             |           | 27               | 24               | 17               | 10               |                 |
| ¾" PEX x ¾" PEX brass elbow | LF4710750 | 1½ <sub>16</sub> | 19 <sub>16</sub> | 1¼ <sub>16</sub> | 3 <sub>8</sub>   | 3 <sub>8</sub>  |
|                             |           | 27               | 24               | 18               | 10               | 10              |
| 1" PEX x 1" PEX EP elbow    | Q4761000  | 1⅝ <sub>8</sub>  | 1¾ <sub>16</sub> | 7 <sub>8</sub>   | 19 <sub>16</sub> |                 |
|                             |           | 42               | 30               | 22               | 20               |                 |
| 1" PEX x 1" PEX brass elbow | LF4711000 | 1¼               | 1¾ <sub>16</sub> | 7 <sub>8</sub>   | 19 <sub>16</sub> | 9 <sub>16</sub> |
|                             |           | 36               | 30               | 22               | 14               | 14              |
| 1¼" PEX x 1¼" PEX EP elbow  | Q4761250  | 1¾               | 17 <sub>16</sub> | 1⅝ <sub>8</sub>  | 5 <sub>8</sub>   |                 |
|                             |           | 43               | 37               | 28               | 15               |                 |
| 1½" PEX x 1½" PEX EP elbow  | Q4761500  | 1⅞ <sub>8</sub>  | 1⅞ <sub>16</sub> | 1⅞ <sub>16</sub> | 1⅞ <sub>16</sub> |                 |
|                             |           | 47               | 43               | 30               | 17               |                 |
| 1½" PEX x 1½" PEX 45 elbow  | Q4761515  | 2⅝ <sub>16</sub> | 1⅞ <sub>16</sub> | 5 <sub>8</sub>   |                  |                 |
|                             |           | 59               | 43               | 15               |                  |                 |
| 2" PEX x 2" PEX EP elbow    | Q4762000  | 2⅞ <sub>16</sub> | 2⅞ <sub>16</sub> | 1⅝ <sub>8</sub>  | 15 <sub>16</sub> |                 |
|                             |           | 65               | 55               | 41               | 24               |                 |
| 2" PEX x 2" PEX 45 elbow    | Q4762020  | 2⅞ <sub>16</sub> | 2⅞ <sub>16</sub> | ¾                |                  |                 |
|                             |           | 74               | 55               | 19               |                  |                 |
| 2½" PEX x 2½" PEX EP elbow  | Q4762500  | 3⅝ <sub>16</sub> | 2⅞ <sub>16</sub> | 2⅞ <sub>16</sub> | 19 <sub>16</sub> |                 |
|                             |           | 84               | 72               | 53               | 31               |                 |
| 2½" PEX x 2½" PEX 45 elbow  | Q4762525  | 3⅞ <sub>16</sub> | 2⅞ <sub>16</sub> | 1                |                  |                 |
|                             |           | 97               | 72               | 25               |                  |                 |
| 3" PEX x 3" PEX EP elbow    | Q4763000  | 3⅞ <sub>16</sub> | 3⅞ <sub>16</sub> | 2½               | 17 <sub>16</sub> |                 |
|                             |           | 99               | 86               | 64               | 36               |                 |
| 3" PEX x 3" PEX 45 elbow    | Q4763030  | 4½               | 3⅞ <sub>16</sub> | 1⅝ <sub>8</sub>  |                  |                 |
|                             |           | 114              | 86               | 28               |                  |                 |

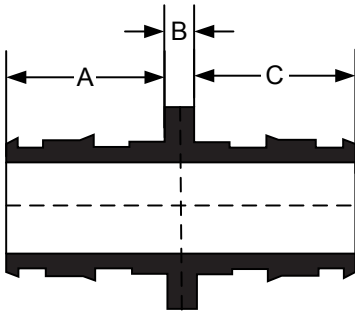


| ProPEX couplings  |           | A           | B      | C           |
|-------------------|-----------|-------------|--------|-------------|
| Description       | Part no.  | in/mm       | in/mm  | in/mm       |
| ½" PEX x ½" PEX   | Q4775050  | ¾<br>18     | ⅛<br>3 | ¾<br>18     |
|                   | LF4545050 | 11/16<br>18 | ⅛<br>3 | 11/16<br>18 |
| ¾" PEX x ¾" PEX   | Q4777575  | 15/16<br>24 | ⅛<br>3 | 15/16<br>24 |
|                   | LF4547575 | 15/16<br>24 | ⅛<br>3 | 15/16<br>24 |
| 1" PEX x 1" PEX   | Q4771010  | 13/16<br>30 | ⅛<br>3 | 13/16<br>30 |
|                   | LF4541010 | 13/16<br>30 | ⅛<br>3 | 13/16<br>30 |
| 1¼" PEX x 1¼" PEX | Q4771313  | 17/16<br>37 | ⅛<br>3 | 17/16<br>37 |
| 1½" PEX x 1½" PEX | Q4771515  | 11/16<br>44 | ⅛<br>3 | 11/16<br>44 |
| 2" PEX x 2" PEX   | Q4772020  | 23/16<br>55 | ¼<br>6 | 23/16<br>55 |
|                   | Q4772525  | 21/16<br>72 | ¼<br>6 | 21/16<br>72 |
| 3" PEX x 3" PEX   | Q4773030  | 33/8<br>86  | ¼<br>6 | 33/8<br>86  |

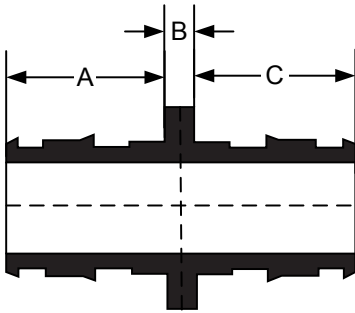


| ProPEX reducing couplings |           | A     | B     | C     |
|---------------------------|-----------|-------|-------|-------|
| Description               | Part no.  | in/mm | in/mm | in/mm |
| ¾" PEX x ½" PEX           | Q4775075  | 15/16 | 1/8   | ¾     |
|                           |           | 24    | 3     | 19    |
| 1" PEX x ¾" PEX           | Q4777510  | 13/16 | 1/8   | 15/16 |
|                           |           | 30    | 3     | 24    |
|                           | LF4547510 | 13/16 | 1/8   | 15/16 |
| 1¼" PEX x ¾" PEX          | Q4771307  | 17/16 | 1/8   | 15/16 |
|                           |           | 37    | 3     | 24    |
| 1¼" PEX x 1" PEX          | Q4771310  | 17/16 | 1/8   | 13/16 |
|                           |           | 37    | 3     | 30    |
| 1½" PEX x ¾" PEX          | Q4771507  | 11/16 | 1/8   | 15/16 |
|                           |           | 44    | 3     | 24    |
| 1½" PEX x 1" PEX          | Q4771510  | 11/16 | 1/8   | 13/16 |
|                           |           | 44    | 3     | 30    |
| 1½" PEX x 1¼" PEX         | Q4771513  | 11/16 | 1/8   | 17/16 |
|                           |           | 44    | 3     | 37    |
| 2" PEX x 1½" PEX          | Q4772015  | 23/16 | ¼     | 11/16 |
|                           |           | 55    | 6     | 44    |
| 2½" PEX x 1¼" PEX         | Q4772513  | 21/16 | ¼     | 17/16 |
|                           |           | 72    | 6     | 37    |
| 2½" PEX x 1½" PEX         | Q4772515  | 21/16 | ¼     | 11/16 |
|                           |           | 72    | 6     | 44    |
| 2½" PEX x 2" PEX          | Q4772520  | 21/16 | ¼     | 23/16 |
|                           |           | 72    | 6     | 55    |
| 3" PEX x 2" PEX           | Q4773020  | 33/16 | ¼     | 23/16 |
|                           |           | 86    | 6     | 55    |
| 3" PEX x 2½" PEX          | Q4773025  | 33/16 | ¼     | 21/16 |
|                           |           | 86    | 6     | 72    |




| ProPEX brass male threaded adapters |           | A       | B      | C     |
|-------------------------------------|-----------|---------|--------|-------|
| Description                         | Part no.  | in/mm   | in/mm  | in/mm |
| 3/8" PEX x 1/2" NPT                 | LF4523850 | 1 5/8   | 1      | 7/8   |
|                                     |           | 41      | 25     | 22    |
| 1/2" PEX x 1/2" NPT                 | Q5525050  | 1 5/8   | 7/8    | 7/8   |
|                                     |           | 41      | 23     | 22    |
|                                     | LF4525050 | 1 11/16 | 1 5/16 | 7/8   |
| 1/2" PEX x 3/4" NPT                 | LF4525075 | 42      | 24     | 22    |
|                                     |           | 1 15/16 | 1 1/16 | 1 1/8 |
| 3/4" PEX x 3/4" NPT                 | LF4527575 | 45      | 27     | 29    |
|                                     |           | 1 7/8   | 1      | 1 1/8 |
|                                     | Q5527575  | 48      | 25     | 29    |
| 3/4" PEX x 1" NPT                   | LF4527510 | 1 7/8   | 7/8    | 1 1/8 |
|                                     |           | 47      | 23     | 29    |
|                                     | Q5527510  | 2 1/4   | 1 1/4  | 1 3/8 |
| 1" PEX x 3/4" NPT                   | LF4521075 | 56      | 32     | 35    |
|                                     |           | 2       | 1 1/16 | 1 3/8 |
|                                     | Q5521075  | 51      | 27     | 35    |
| 1" PEX x 1" NPT                     | LF4521010 | 2 1/4   | 1 1/16 | 1 1/4 |
|                                     |           | 57      | 27     | 32    |
|                                     | Q5521010  | 2 1/16  | 1 1/16 | 1 1/4 |
| 1 1/4" PEX x 1 1/4" NPT             | LF4521313 | 53      | 27     | 29    |
|                                     |           | 2 5/8   | 1 3/8  | 1 3/8 |
|                                     | Q5521313  | 59      | 29     | 35    |
| 1 1/2" PEX x 1 1/2" NPT             | LF4521515 | 2 1/4   | 1 1/16 | 1 3/8 |
|                                     |           | 57      | 27     | 35    |
|                                     | Q5521515  | 2 1/2   | 1 1/16 | 1 3/4 |
| 2" PEX x 2" NPT                     | LF4522020 | 66      | 30     | 44    |
|                                     |           | 3       | 1 1/4  | 2     |
|                                     | Q5522020  | 76      | 32     | 51    |
| 2 1/2" PEX x 2 1/2" NPT             | LF4522525 | 2 15/16 | 1 1/4  | 2     |
|                                     |           | 74      | 32     | 51    |
|                                     | Q5522525  | 3 9/16  | 1 3/8  | 2 3/8 |
| 3" PEX x 3" NPT                     | LF4523030 | 90      | 36     | 60    |
|                                     |           | 3 7/16  | 1 1/16 | 2 3/8 |
|                                     |           | 87      | 33     | 60    |
|                                     |           | 4 15/16 | 2      | 3 1/4 |
|                                     |           | 123     | 51     | 83    |
|                                     |           | 5 1/2   | 2 1/8  | 3 3/4 |
|                                     |           | 140     | 55     | 95    |




| ProPEX brass female threaded adapters |           | A                              | B                              | C                              |
|---------------------------------------|-----------|--------------------------------|--------------------------------|--------------------------------|
| Description                           | Part no.  | in/mm                          | in/mm                          | in/mm                          |
| ½" PEX x ½" NPT                       | Q5575050  | 1 <sup>1</sup> / <sub>16</sub> | 7 <sup>7</sup> / <sub>8</sub>  | 1                              |
|                                       |           | 40                             | 22                             | 25                             |
|                                       | LF4575050 | 1 <sup>1</sup> / <sub>16</sub> | 7 <sup>7</sup> / <sub>8</sub>  | 1                              |
|                                       |           | 40                             | 22                             | 25                             |
| ½" PEX x ¾" NPT                       | LF4575075 | 1 <sup>3</sup> / <sub>4</sub>  | 1 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> |
|                                       |           | 44                             | 26                             | 30                             |
| ¾" PEX x ¾" NPT                       | Q5577575  | 1 <sup>7</sup> / <sub>8</sub>  | 7 <sup>7</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>16</sub> |
|                                       |           | 47                             | 23                             | 30                             |
|                                       | LF4577575 | 1 <sup>7</sup> / <sub>8</sub>  | 7 <sup>7</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>16</sub> |
|                                       |           | 47                             | 23                             | 30                             |
| ¾" PEX x 1" NPT                       | Q5577510  | 2 <sup>1</sup> / <sub>8</sub>  | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>2</sub>  |
|                                       |           | 54                             | 32                             | 38                             |
|                                       | LF4577510 | 2 <sup>9</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>4</sub>  | 1 <sup>1</sup> / <sub>2</sub>  |
|                                       |           | 56                             | 32                             | 38                             |
| 1" PEX x 1" NPT                       | Q5571010  | 2 <sup>3</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>2</sub>  |
|                                       |           | 60                             | 30                             | 38                             |
|                                       | LF4571010 | 2 <sup>3</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>2</sub>  |
|                                       |           | 60                             | 30                             | 38                             |
| 1¼" PEX x 1¼" NPT                     | Q5571313  | 2 <sup>9</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub>  | 2                              |
|                                       |           | 65                             | 28                             | 51                             |
|                                       | LF4571313 | 2 <sup>9</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub>  | 2                              |
|                                       |           | 65                             | 28                             | 51                             |
| 1½" PEX x 1½" NPT                     | Q5571515  | 2 <sup>7</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>4</sub>  |
|                                       |           | 73                             | 29                             | 57                             |
|                                       | LF4571515 | 2 <sup>7</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>4</sub>  |
|                                       |           | 73                             | 29                             | 57                             |
| 2" PEX x 2" NPT                       | Q5572020  | 3 <sup>9</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub>  | 3                              |
|                                       |           | 90                             | 36                             | 76                             |
|                                       | LF4572020 | 3 <sup>9</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub>  | 3                              |
|                                       |           | 90                             | 36                             | 76                             |

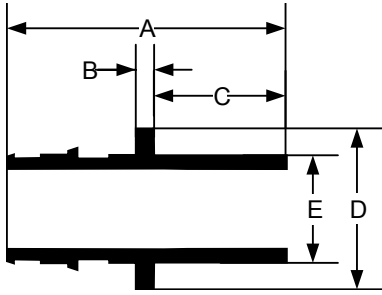

| ProPEX brass fitting adapters |           | A     | B     | C     | D     | E     |
|-------------------------------|-----------|-------|-------|-------|-------|-------|
| Description                   | Part no.  | in/mm | in/mm | in/mm | in/mm | in/mm |
| ½" PEX x ½" copper            | LF4505050 | 1⅝    | ⅜     | 9/16  | ¾     | 5/8   |
|                               |           | 35    | 3     | 14    | 20    | 16    |
|                               | Q5505050  | 1⅞    | ⅜     | 7/8   | ¾     | 5/8   |
| ½" PEX x ¾" copper            | LF4505075 | 43    | 3     | 22    | 20    | 16    |
|                               |           | 1⅝    | ⅜     | 13/16 | 15/16 | 7/8   |
| 5/8" PEX x ½" copper          | Q4506375  | 42    | 3     | 21    | 23    | 22    |
|                               |           | 1⅞    | ⅜     | 9/16  | 11/16 | 5/8   |
| 5/8" PEX x ¾" copper          | Q4506375  | 39    | 3     | 14    | 26    | 16    |
|                               |           | 1⅞    | ⅜     | 13/16 | 15/16 | 7/8   |
| ¾" PEX x ½" copper            | LF4507550 | 46    | 3     | 21    | 24    | 22    |
|                               |           | 1⅝    | ⅜     | 9/16  | 1⅝    | 5/8   |
|                               | Q5507550  | 41    | 3     | 14    | 28    | 16    |
| ¾" PEX x ¾" copper            | LF4507575 | 1⅞    | ⅜     | 7/8   | 1⅝    | 5/8   |
|                               |           | 50    | 3     | 22    | 28    | 16    |
|                               | Q5507575  | 1⅝    | ⅜     | 13/16 | 1⅝    | 7/8   |
| ¾" PEX x 1" copper            | LF4507510 | 48    | 3     | 21    | 28    | 22    |
|                               |           | 2⅞    | ⅜     | 1     | 1⅝    | 7/8   |
|                               | Q5507510  | 53    | 3     | 25    | 28    | 22    |
| 1" PEX x 1" copper            | LF4501010 | 2⅞    | ⅜     | 1     | 1⅞    | 1⅝    |
|                               |           | 53    | 3     | 25    | 30    | 28    |
|                               | Q5501010  | 2⅞    | ⅜     | 1     | 1⅝    | 1⅝    |
| 1¼" PEX x 1¼" copper          | LF4501313 | 53    | 3     | 25    | 29    | 28    |
|                               |           | 2¼    | ⅜     | 1     | 1⅝    | 1⅝    |
|                               | Q5501313  | 58    | 3     | 25    | 35    | 29    |
| 1½" PEX x 1½" copper          | LF4501515 | 2⅝    | ⅜     | 1     | 1⅝    | 1⅝    |
|                               |           | 66    | 3     | 25    | 42    | 35    |
|                               | Q5501515  | 2⅞    | ⅜     | 1⅝    | 1¾    | 1⅝    |
| 2" PEX x 2" copper            | LF4502020 | 69    | 3     | 29    | 44    | 35    |
|                               |           | 3     | ⅜     | 13/16 | 1⅝    | 1⅝    |
|                               | Q5502020  | 76    | 3     | 29    | 48    | 41    |
| 2" PEX x 2" copper            | LF4502020 | 3⅞    | ⅜     | 13/16 | 1⅝    | 1⅝    |
|                               |           | 86    | 3     | 40    | 48    | 41    |
|                               | LF4502020 | 3⅞    | ¼     | 17/16 | 2⅝    | 2⅝    |
| 2" PEX x 2" copper            | LF4502020 | 97    | 6     | 36    | 66    | 54    |
|                               |           | 4⅞    | ¼     | 1¾    | 2⅞    | 2⅝    |
|                               |           | 105   | 6     | 44    | 68    | 54    |

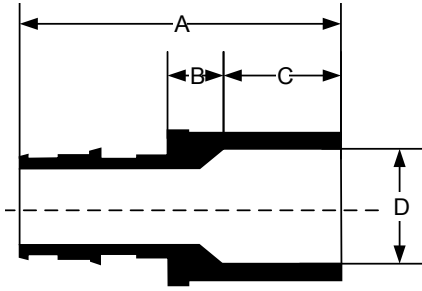


| ProPEX brass sweat adapters |           | A       | B     | C       | D     |
|-----------------------------|-----------|---------|-------|---------|-------|
| Description                 | Part no.  | in/mm   | in/mm | in/mm   | in/mm |
| 3/8" PEX x 1/2" copper      | LF4513850 | 1 5/16  | 1/4   | 1/2     | 5/8   |
|                             |           | 34      | 6     | 13      | 16    |
| 1/2" PEX x 1/2" copper      | LF4515050 | 1 3/8   | 3/16  | 1/2     | 5/8   |
|                             |           | 35      | 5     | 13      | 16    |
|                             | Q5515050  | 1 3/8   | 3/16  | 1/2     | 5/8   |
|                             |           | 35      | 5     | 13      | 16    |
| 1/2" PEX x 3/4" copper      | LF4515075 | 1 5/8   | 3/16  | 3/4     | 7/8   |
|                             |           | 41      | 5     | 19      | 22    |
| 3/4" PEX x 1/2" copper      | LF4517550 | 1 11/16 | 1/4   | 1/2     | 5/8   |
|                             |           | 42      | 6     | 13      | 16    |
|                             | Q5517550  | 1 11/16 | 1/4   | 1/2     | 5/8   |
|                             |           | 42      | 6     | 13      | 16    |
| 3/4" PEX x 3/4" copper      | LF4517575 | 1 7/8   | 3/16  | 3/4     | 7/8   |
|                             |           | 47      | 5     | 19      | 22    |
|                             | Q5517575  | 1 7/8   | 3/16  | 3/4     | 7/8   |
|                             |           | 47      | 5     | 19      | 22    |
| 3/4" PEX x 1" copper        | LF4517510 | 2 1/8   | 1/4   | 1 5/16  | 1 1/8 |
|                             |           | 53      | 6     | 23      | 29    |
|                             | Q5517510  | 2 1/8   | 1/4   | 1 5/16  | 1 1/8 |
|                             |           | 53      | 6     | 23      | 29    |
| 1" PEX x 1" copper          | LF4511010 | 2 1/4   | 3/16  | 1 5/16  | 1 1/8 |
|                             |           | 58      | 5     | 23      | 29    |
|                             | Q5511010  | 2 1/4   | 3/16  | 1 5/16  | 1 1/8 |
|                             |           | 58      | 5     | 23      | 29    |
| 1 1/4" PEX x 1 1/4" copper  | LF4511313 | 2 5/8   | 3/16  | 1       | 1 3/8 |
|                             |           | 66      | 5     | 25      | 33    |
|                             | Q5511313  | 2 5/8   | 3/16  | 1       | 1 3/8 |
|                             |           | 66      | 5     | 25      | 33    |
| 1 1/2" PEX x 1 1/2" copper  | LF4511515 | 3 3/16  | 1/4   | 1 1/16  | 1 5/8 |
|                             |           | 78      | 6     | 28      | 41    |
|                             | Q5511515  | 3 3/16  | 1/4   | 1 1/16  | 1 5/8 |
|                             |           | 78      | 6     | 28      | 41    |
| 2" PEX x 2" copper          | LF4512020 | 3 3/4   | 1/4   | 1 5/16  | 2 1/8 |
|                             |           | 95      | 6     | 34      | 54    |
|                             | Q5512020  | 3 3/4   | 1/4   | 1 5/16  | 2 1/8 |
|                             |           | 95      | 6     | 34      | 54    |
| 2 1/2" PEX x 2 1/2" copper  | LF4512525 | 4 1/16  | 5/16  | 1 7/16  | 2 5/8 |
|                             |           | 116     | 8     | 37      | 67    |
| 3" PEX x 3" copper          | LF4513030 | 5 1/16  | 3/16  | 1 11/16 | 3 1/8 |
|                             |           | 135     | 8     | 42      | 80    |

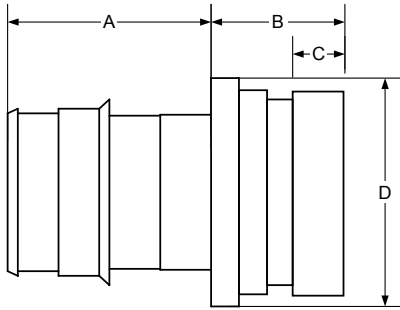



| ProPEX LF brass groove fitting adapters  |            | A                              | B                             | C                             | D                               |
|--|------------|--------------------------------|-------------------------------|-------------------------------|---------------------------------|
| Description  | Part no.   | in/mm                          | in/mm                         | in/mm                         | in/mm                           |
| 2" PEX x 2" CTS groove   | LFV2962020 | 2 <sup>1</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>2</sub> | 5 <sup>1</sup> / <sub>8</sub> | 2 <sup>11</sup> / <sub>16</sub> |
|  |            | 54                             | 38                            | 15                            | 68                              |
| 2" PEX x 2 <sup>1</sup> / <sub>2</sub> " CTS groove                              | LFV2962025 | 2 <sup>1</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>2</sub> | 5 <sup>1</sup> / <sub>8</sub> | 2 <sup>11</sup> / <sub>16</sub> |
|  |            | 54                             | 38                            | 15                            | 68                              |
| 2 <sup>1</sup> / <sub>2</sub> " PEX x 2 <sup>1</sup> / <sub>2</sub> " CTS groove | LFV2962525 | 2 <sup>9</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>2</sub> | 5 <sup>1</sup> / <sub>8</sub> | 3 <sup>3</sup> / <sub>8</sub>   |
|  |            | 72                             | 38                            | 15                            | 85                              |
| 3" PEX x 3" CTS groove   | LFV2963030 | 3 <sup>3</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>2</sub> | 5 <sup>1</sup> / <sub>8</sub> | 3 <sup>19</sup> / <sub>16</sub> |
|  |            | 86                             | 38                            | 15                            | 96                              |
| 2" PEX x 2" IPS groove   | LFV2972020 | 2 <sup>1</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>2</sub> | 5 <sup>1</sup> / <sub>8</sub> | 2 <sup>11</sup> / <sub>16</sub> |
|  |            | 54                             | 38                            | 15                            | 68                              |
| 2" PEX x 2 <sup>1</sup> / <sub>2</sub> " IPS groove                              | LFV2972025 | 2 <sup>1</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>2</sub> | 5 <sup>1</sup> / <sub>8</sub> | 2 <sup>7</sup> / <sub>8</sub>   |
|  |            | 54                             | 38                            | 15                            | 73                              |
| 2 <sup>1</sup> / <sub>2</sub> " PEX x 2" IPS groove                              | LFV2972520 | 2 <sup>9</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>2</sub> | 5 <sup>1</sup> / <sub>8</sub> | 3 <sup>3</sup> / <sub>8</sub>   |
|  |            | 72                             | 38                            | 15                            | 85                              |
| 2 <sup>1</sup> / <sub>2</sub> " PEX x 2 <sup>1</sup> / <sub>2</sub> " IPS groove | LFV2972525 | 2 <sup>9</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>2</sub> | 5 <sup>1</sup> / <sub>8</sub> | 3 <sup>3</sup> / <sub>8</sub>   |
|  |            | 72                             | 38                            | 15                            | 85                              |
| 2 <sup>1</sup> / <sub>2</sub> " PEX x 3" IPS groove                              | LFV2972530 | 2 <sup>9</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>2</sub> | 5 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>2</sub>   |
|  |            | 72                             | 38                            | 15                            | 89                              |
| 3" PEX x 2 <sup>1</sup> / <sub>2</sub> " IPS groove                              | LFV2973025 | 3 <sup>3</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>2</sub> | 5 <sup>1</sup> / <sub>8</sub> | 3 <sup>19</sup> / <sub>16</sub> |
|  |            | 86                             | 38                            | 15                            | 96                              |
| 3" PEX x 3" IPS groove   | LFV2973030 | 3 <sup>3</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>2</sub> | 5 <sup>1</sup> / <sub>8</sub> | 3 <sup>19</sup> / <sub>16</sub> |
|  |            | 86                             | 38                            | 15                            | 96                              |

| ProPEX LF brass flange adapter               |           | A                              | B                             | C                               | D                             |
|--|-----------|--------------------------------|-------------------------------|---------------------------------|-------------------------------|
| Description                                  | Part no.  | in/mm                          | in/mm                         | in/mm                           | in/mm                         |
| 2 <sup>1</sup> / <sub>2</sub> " PEX x flange | LF2982525 | 3 <sup>3</sup> / <sub>4</sub>  | 5 <sup>1</sup> / <sub>8</sub> | 2 <sup>19</sup> / <sub>16</sub> | 7                             |
|  |           | 96                             | 16                            | 72                              | 178                           |
| 3" PEX x flange                              | LF2983030 | 4 <sup>5</sup> / <sub>16</sub> | 5 <sup>1</sup> / <sub>8</sub> | 4 <sup>1</sup> / <sub>16</sub>  | 7 <sup>1</sup> / <sub>2</sub> |
|  |           | 110                            | 16                            | 104                             | 191                           |

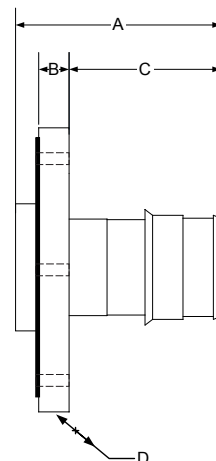





| ProPEX EP opposing-port tees                  |          | A       | B     | C       | D       |
|---|----------|---------|-------|---------|---------|
| Description                                   | Part no. | in/mm   | in/mm | in/mm   | in/mm   |
| 1" PEX x 1" PEX x 3/4" PEX x 3/4" PEX         | Q4801075 | 1 1/16  | 15/16 | 2 1/16  | 1 5/8   |
|   |          | 30      | 24    | 53      | 41      |
| 1 1/4" PEX x 1 1/4" PEX x 3/4" PEX x 3/4" PEX | Q4801375 | 1 7/16  | 15/16 | 2 3/8   | 1 3/4   |
|   |          | 37      | 24    | 60      | 44      |
| 1 1/2" PEX x 1 1/2" PEX x 3/4" PEX x 3/4" PEX | Q4801575 | 1 11/16 | 15/16 | 2 11/16 | 1 15/16 |
|   |          | 43      | 24    | 69      | 49      |
| 2" PEX x 2" PEX x 3/4" PEX x 3/4" PEX         | Q4802075 | 2 3/16  | 15/16 | 3 3/16  | 2       |
|   |          | 55      | 24    | 81      | 51      |

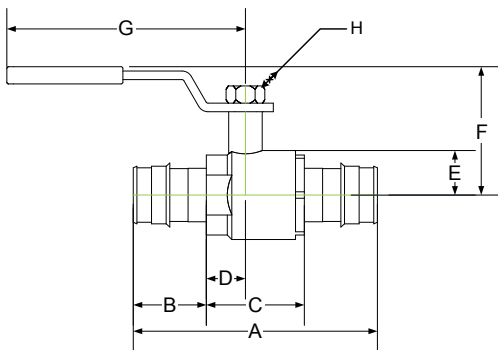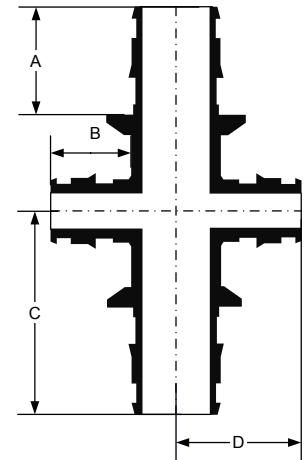


| ProPEX brass ball valves |            | A       | B       | C       | D     | E      | F       | G      | H     |
|--------------------------|------------|---------|---------|---------|-------|--------|---------|--------|-------|
| Description              | Part no.   | in/mm   | in/mm   | in/mm   | in/mm | in/mm  | in/mm   | in/mm  | in/mm |
| 1/2" PEX x 1/2" PEX      | A3205050   | 2 1/2   | 1 1/16  | 1 1/16  | 3/8   | 1/2    | 1 1/16  | 3 3/8  | 3/8   |
|                          |            | 64      | 18      | 27      | 10    | 12     | 43      | 84     | 10    |
|                          | LFC4825050 | 2 1/2   | 1 1/16  | 1 1/16  | 3/8   | 1/2    | 1 1/16  | 3 3/8  | 3/8   |
|                          |            | 64      | 18      | 27      | 10    | 12     | 43      | 84     | 10    |
| 3/4" PEX x 3/4" PEX      | A3207575   | 3 3/8   | 15/16   | 1 1/2   | 1/2   | 1/2    | 1 7/8   | 3 3/8  | 3/8   |
|                          |            | 86      | 24      | 38      | 12    | 12     | 47      | 85     | 10    |
|                          | LFC4827575 | 3 3/8   | 15/16   | 1 1/2   | 1/2   | 1/2    | 1 7/8   | 3 3/8  | 3/8   |
|                          |            | 86      | 24      | 38      | 12    | 12     | 47      | 85     | 10    |
| 1" PEX x 1" PEX          | A3201010   | 4 3/16  | 1 3/16  | 1 13/16 | 3/4   | 13/16  | 1 7/8   | 4 7/16 | 1/2   |
|                          |            | 106     | 30      | 46      | 18    | 20     | 48      | 114    | 12    |
|                          | LFC4821010 | 4 3/16  | 1 3/16  | 1 13/16 | 3/4   | 13/16  | 1 7/8   | 4 7/16 | 1/2   |
|                          |            | 106     | 30      | 46      | 18    | 20     | 48      | 114    | 12    |
| 1 1/4" PEX x 1 1/4" PEX  | A3201313   | 4 13/16 | 1 7/16  | 1 15/16 | 5/8   | 15/16  | 2 1/4   | 4 7/16 | 1/2   |
|                          |            | 122     | 37      | 49      | 17    | 24     | 58      | 114    | 12    |
|                          | LFC4821313 | 4 13/16 | 1 7/16  | 1 15/16 | 5/8   | 15/16  | 2 1/4   | 4 7/16 | 1/2   |
|                          |            | 122     | 37      | 49      | 17    | 24     | 58      | 114    | 12    |
| 1 1/2" PEX x 1 1/2" PEX  | A3201515   | 5 11/16 | 1 11/16 | 2 1/8   | 19/16 | 1 1/8  | 2 11/16 | 5 9/16 | 9/16  |
|                          |            | 145     | 43      | 58      | 23    | 28     | 69      | 142    | 14    |
|                          | LFC4821515 | 5 11/16 | 1 11/16 | 2 1/8   | 19/16 | 1 1/8  | 2 11/16 | 5 9/16 | 9/16  |
|                          |            | 145     | 43      | 58      | 23    | 28     | 69      | 142    | 14    |
| 2" PEX x 2" PEX          | A3202020   | 7 1/8   | 2 1/8   | 2 13/16 | 1 1/8 | 1 7/16 | 3 3/8   | 5 9/16 | 9/16  |
|                          |            | 181     | 55      | 72      | 28    | 37     | 86      | 142    | 14    |
|                          | LFC4822020 | 7 1/8   | 2 1/8   | 2 13/16 | 1 1/8 | 1 7/16 | 3 3/8   | 5 9/16 | 9/16  |
|                          |            | 181     | 55      | 72      | 28    | 37     | 86      | 142    | 14    |


| ProPEX ring installed diameter |          | A                               |
|--------------------------------|----------|---------------------------------|
| Description                    | Part no. | in/mm                           |
| ½" ProPEX Ring with Stop       | Q4690512 | 1 <sup>5</sup> / <sub>16</sub>  |
|                                |          | 24                              |
| ¾" ProPEX Ring with Stop       | Q4690756 | 1¼                              |
|                                |          | 32                              |
| 1" ProPEX Ring with Stop       | Q4691000 | 1 <sup>9</sup> / <sub>16</sub>  |
|                                |          | 40                              |
| 1¼" ProPEX Ring with Stop      | Q4691250 | 1 <sup>13</sup> / <sub>16</sub> |
|                                |          | 47                              |
| 1½" ProPEX Ring with Stop      | Q4691500 | 2 <sup>1</sup> / <sub>16</sub>  |
|                                |          | 53                              |
| 2" ProPEX Ring with Stop       | Q4692000 | 2 <sup>9</sup> / <sub>16</sub>  |
|                                |          | 74                              |
| 2½" ProPEX Ring with Stop      | Q4692500 | 3 <sup>3</sup> / <sub>16</sub>  |
|                                |          | 91                              |
| 3" ProPEX Ring with Stop       | Q4693000 | 4¼                              |
|                                |          | 108                             |

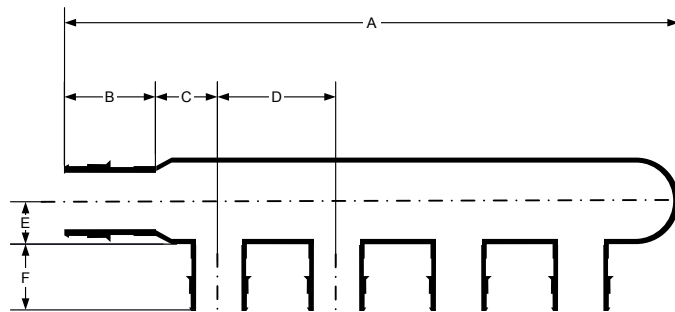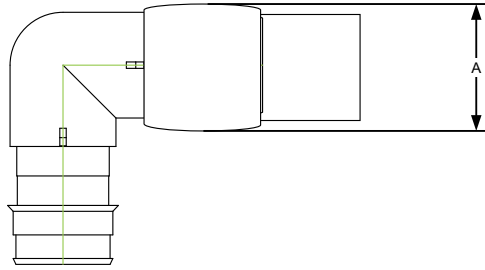


| EP branch multiport tees               |          | A                               | B                              | C                              | D     | E                              | F                              |
|--|----------|---------------------------------|--------------------------------|--------------------------------|-------|--------------------------------|--------------------------------|
| Description                            | Part no. | in/mm                           | in/mm                          | in/mm                          | in/mm | in/mm                          | in/mm                          |
| ¾" EP Branch Multiport Tee, 3 outlets  | Q2237550 | 5 <sup>5</sup> / <sub>8</sub>   | 1 <sup>5</sup> / <sub>16</sub> | 5 <sup>5</sup> / <sub>8</sub>  | 1¼    | 7 <sup>7</sup> / <sub>16</sub> | ¾                              |
|  |          | 131                             | 24                             | 16                             | 32    | 12                             | 18                             |
| 1¼" EP Branch Multiport Tee, 3 outlets | Q2231375 | 6 <sup>7</sup> / <sub>8</sub>   | 1 <sup>7</sup> / <sub>16</sub> | 7 <sup>7</sup> / <sub>8</sub>  | 1¾    | 1 <sup>1</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> |
|  |          | 174                             | 37                             | 23                             | 44    | 18                             | 24                             |
| ¾" EP Branch Multiport Tee, 4 outlets  | Q2247550 | 6 <sup>3</sup> / <sub>8</sub>   | 1 <sup>5</sup> / <sub>16</sub> | 5 <sup>5</sup> / <sub>8</sub>  | 1¼    | 7 <sup>7</sup> / <sub>16</sub> | ¾                              |
|  |          | 163                             | 24                             | 16                             | 32    | 12                             | 18                             |
| 1" EP Branch Multiport Tee, 4 outlets  | Q2241050 | 6 <sup>11</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>16</sub> | 1¼    | 5 <sup>5</sup> / <sub>8</sub>  | ¾                              |
|  |          | 170                             | 30                             | 21                             | 32    | 15                             | 18                             |
| ¾" EP Branch Multiport Tee, 6 outlets  | Q2267550 | 8 <sup>7</sup> / <sub>8</sub>   | 1 <sup>5</sup> / <sub>16</sub> | 5 <sup>5</sup> / <sub>8</sub>  | 1¼    | 7 <sup>7</sup> / <sub>16</sub> | ¾                              |
|  |          | 226                             | 24                             | 16                             | 32    | 12                             | 18                             |
| 1" EP Branch Multiport Tee, 6 outlets  | Q2261050 | 9¼                              | 1 <sup>3</sup> / <sub>16</sub> | 5 <sup>5</sup> / <sub>8</sub>  | 1¼    | 9 <sup>9</sup> / <sub>16</sub> | ¾                              |
|  |          | 235                             | 30                             | 16                             | 32    | 14                             | 18                             |

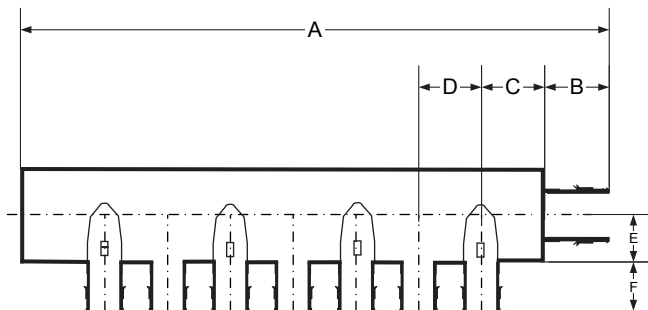


| Commercial EP branch multiport tees     |          | A                               | B                              | C                             | D                             | E                              | F     |
|---|----------|---------------------------------|--------------------------------|-------------------------------|-------------------------------|--------------------------------|-------|
| Description                             | Part no. | in/mm                           | in/mm                          | in/mm                         | in/mm                         | in/mm                          | in/mm |
| 3/4" EP Branch Multiport Tee, 7 outlets | Q2277550 | 8 <sup>1</sup> / <sub>16</sub>  | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub> | 7 <sup>7</sup> / <sub>8</sub> | 1 <sup>1</sup> / <sub>16</sub> | 3/4   |
|   |          | 220                             | 24                             | 28                            | 23                            | 18                             | 18    |
| 3/4" EP Branch Multiport Tee, 8 outlets | Q2287550 | 9 <sup>9</sup> / <sub>16</sub>  | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub> | 7 <sup>7</sup> / <sub>8</sub> | 1 <sup>1</sup> / <sub>16</sub> | 3/4   |
|   |          | 243                             | 24                             | 28                            | 23                            | 18                             | 18    |
| 1" EP Branch Multiport Tee, 7 outlets   | Q2271051 | 8 <sup>7</sup> / <sub>8</sub>   | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub> | 7 <sup>7</sup> / <sub>8</sub> | 1 <sup>1</sup> / <sub>16</sub> | 3/4   |
|   |          | 226                             | 30                             | 28                            | 23                            | 18                             | 18    |
| 1" EP Branch Multiport Tee, 8 outlets   | Q2281051 | 9 <sup>9</sup> / <sub>16</sub>  | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub> | 7 <sup>7</sup> / <sub>8</sub> | 1 <sup>1</sup> / <sub>16</sub> | 3/4   |
|   |          | 249                             | 30                             | 28                            | 23                            | 18                             | 18    |
| 1" EP Branch Multiport Tee, 10 outlets  | Q2101051 | 11 <sup>9</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub> | 7 <sup>7</sup> / <sub>8</sub> | 1 <sup>1</sup> / <sub>16</sub> | 3/4   |
|   |          | 294                             | 30                             | 28                            | 23                            | 18                             | 18    |
| 1" EP Branch Multiport Tee, 12 outlets  | Q2121051 | 13 <sup>3</sup> / <sub>8</sub>  | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>8</sub> | 7 <sup>7</sup> / <sub>8</sub> | 1 <sup>1</sup> / <sub>16</sub> | 3/4   |
|   |          | 340                             | 30                             | 28                            | 23                            | 18                             | 18    |

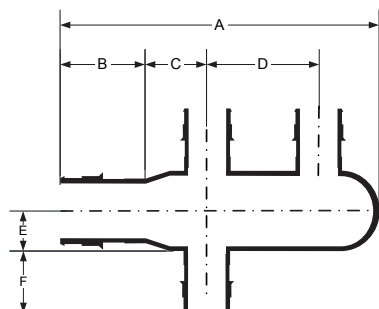


| EP branch opposing-port multiport tees                |          | A                              | B                              | C                             | D                             | E                              | F     |
|---|----------|--------------------------------|--------------------------------|-------------------------------|-------------------------------|--------------------------------|-------|
| Description   | Part no. | in/mm                          | in/mm                          | in/mm                         | in/mm                         | in/mm                          | in/mm |
| 3/4" EP Branch Opposing-port Multiport Tee, 3 outlets | Q2337550 | 3 <sup>3</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> | 5 <sup>5</sup> / <sub>8</sub> | 1 <sup>1</sup> / <sub>4</sub> | 7 <sup>7</sup> / <sub>16</sub> | 3/4   |
|   |          | 91                             | 24                             | 16                            | 32                            | 11                             | 18    |
| 3/4" EP Branch Opposing-port Multiport Tee, 4 outlets | Q2347550 | 3 <sup>3</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> | 5 <sup>5</sup> / <sub>8</sub> | 1 <sup>1</sup> / <sub>4</sub> | 7 <sup>7</sup> / <sub>16</sub> | 3/4   |
|   |          | 91                             | 24                             | 16                            | 32                            | 11                             | 18    |
| 3/4" EP Branch Opposing-port Multiport Tee, 8 outlets | Q2387550 | 6 <sup>1</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> | 5 <sup>5</sup> / <sub>8</sub> | 1 <sup>1</sup> / <sub>4</sub> | 7 <sup>7</sup> / <sub>16</sub> | 3/4   |
|   |          | 154                            | 24                             | 16                            | 32                            | 11                             | 18    |

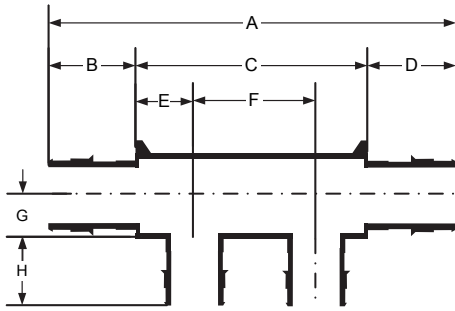


| EP flow-through multiport tees |          | A       | B      | C      | D      | E      | F     | G      | H      |
|--------------------------------|----------|---------|--------|--------|--------|--------|-------|--------|--------|
| Description                    | Part no. | in/mm   | in/mm  | in/mm  | in/mm  | in/mm  | in/mm | in/mm  | in/mm  |
| 2 outlets, 3/4" x 3/4"         | Q2227557 | 4 3/8   | 1 5/16 | 2 1/2  | 1 5/16 | 5/8    | 1 1/4 | 7/16   | 3/4    |
|                                |          | 112     | 24     | 64     | 24     | 16     | 32    | 11     | 19     |
| 3 outlets, 3/4" x 3/4"         | Q2237557 | 5 11/16 | 1 5/16 | 3 3/4  | 1 5/16 | 5/8    | 1 1/4 | 7/16   | 3/4    |
|                                |          | 143     | 24     | 95     | 24     | 16     | 32    | 11     | 19     |
| 3 outlets, 1" x 3/4"           | Q2231057 | 6 3/16  | 1 3/16 | 4 1/16 | 1 5/16 | 3/4    | 1 1/4 | 9/16   | 3/4    |
|                                |          | 157     | 30     | 103    | 24     | 19     | 32    | 14     | 19     |
| 3 outlets, 1 3/4" x 1 1/4"     | Q2231373 | 8 3/16  | 1 7/16 | 5 5/16 | 1 7/16 | 7/8    | 1 3/4 | 5/8    | 1      |
|                                |          | 208     | 37     | 135    | 37     | 23     | 44    | 17     | 25     |
| 3 outlets, 2" x 2"             | Q2232102 | 10 5/8  | 2 3/16 | 6 1/4  | 2 3/16 | 1 1/8  | 2     | 1 5/16 | 1 5/16 |
|                                |          | 269     | 55     | 158    | 55     | 28     | 51    | 24     | 33     |
| 4 outlets, 3/4" x 3/4"         | Q2247557 | 7 1/16  | 1 5/16 | 5 3/8  | 1 5/16 | 1 1/16 | 1 1/2 | 7/16   | 3/4    |
|                                |          | 198     | 24     | 150    | 24     | 18     | 38    | 11     | 18     |
| 4 outlets, 1" x 3/4"           | Q2241057 | 7 1/8   | 1 3/16 | 5      | 1 5/16 | 5/8    | 1 1/4 | 9/16   | 3/4    |
|                                |          | 180     | 30     | 127    | 24     | 16     | 32    | 14     | 19     |
| 4 outlets, 1" x 1"             | Q2241051 | 7 11/16 | 1 3/16 | 5 5/16 | 1 3/16 | 3/4    | 1 1/4 | 9/16   | 3/4    |
|                                |          | 195     | 30     | 135    | 30     | 19     | 32    | 14     | 19     |
| 6 outlets, 3/4" x 3/4"         | Q2267557 | 9 3/8   | 1 5/16 | 7 1/2  | 1 5/16 | 5/8    | 1 1/4 | 7/16   | 3/4    |
|                                |          | 239     | 24     | 191    | 24     | 16     | 32    | 11     | 19     |
| 6 outlets, 1" x 3/4"           | Q2261057 | 9 5/8   | 1 3/16 | 7 1/2  | 1 5/16 | 5/8    | 1 1/4 | 9/16   | 3/4    |
|                                |          | 244     | 30     | 191    | 24     | 16     | 32    | 14     | 19     |
| 6 outlets, 1" x 1"             | Q2261051 | 9 3/8   | 1 3/16 | 7 1/2  | 1 3/16 | 5/8    | 1 1/4 | 9/16   | 3/4    |
|                                |          | 251     | 30     | 191    | 30     | 16     | 32    | 14     | 19     |

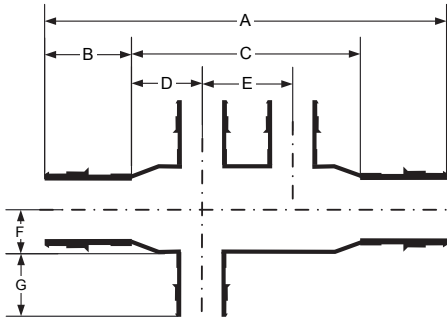


| EP flow-through opposing-port multiport tees |          | A                               | B                              | C     | D     | E     | F     | G     |
|--|----------|---------------------------------|--------------------------------|-------|-------|-------|-------|-------|
| Description                                  | Part no. | in/mm                           | in/mm                          | in/mm | in/mm | in/mm | in/mm | in/mm |
| 3 outlets, 3/4" x 3/4"                       | Q2337557 | 4 <sup>7</sup> / <sub>16</sub>  | 1 <sup>5</sup> / <sub>16</sub> | 2 1/2 | 5/8   | 1 1/4 | 1/2   | 3/4   |
|  |          | 112                             | 24                             | 63    | 16    | 32    | 12    | 18    |
| 4 outlets, 3/4" x 3/4"                       | Q2347557 | 4 <sup>7</sup> / <sub>16</sub>  | 1 <sup>5</sup> / <sub>16</sub> | 2 1/2 | 5/8   | 1 1/4 | 1/2   | 3/4   |
|  |          | 112                             | 24                             | 63    | 16    | 32    | 12    | 19    |
| 6 outlets, 3/4" x 3/4"                       | Q2367557 | 5 <sup>11</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> | 3 3/4 | 5/8   | 1 1/4 | 1/2   | 3/4   |
|  |          | 144                             | 24                             | 95    | 16    | 32    | 12    | 19    |

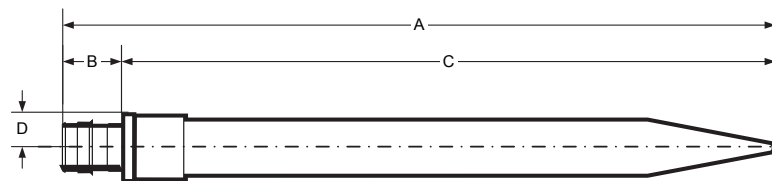


| ProPEX LF copper straight stubs      |           | A                                | B                               | C                                | D                               |
|--------------------------------------|-----------|----------------------------------|---------------------------------|----------------------------------|---------------------------------|
| Description                          | Part no.  | in/mm                            | in/mm                           | in/mm                            | in/mm                           |
| 1/2" PEX LF brass x 1/2" copper, 8"  | LF2935050 | 8 <sup>5</sup> / <sub>16</sub>   | 1 <sup>1</sup> / <sub>16</sub>  | 7 <sup>7</sup> / <sub>16</sub>   | 3/8                             |
|                                      |           | 211                              | 18                              | 193                              | 10                              |
| 1/2" PEX LF brass x 1/2" copper, 15" | LF2945050 | 14 1/2                           | 1 <sup>1</sup> / <sub>16</sub>  | 13 <sup>13</sup> / <sub>16</sub> | 3/8                             |
|                                      |           | 368                              | 18                              | 350                              | 10                              |
| 2 1/2" PEX LF brass x 2 1/2" copper  | LF2962525 | 12 <sup>1</sup> / <sub>8</sub>   | 2 <sup>13</sup> / <sub>16</sub> | 9 1/4                            | 1 <sup>13</sup> / <sub>16</sub> |
|                                      |           | 308                              | 72                              | 236                              | 46                              |
| 3" PEX LF brass x 3" copper          | LF2963030 | 13 <sup>11</sup> / <sub>16</sub> | 3 <sup>3</sup> / <sub>8</sub>   | 10 <sup>10</sup> / <sub>16</sub> | 2 1/8                           |
|                                      |           | 347                              | 86                              | 261                              | 53                              |

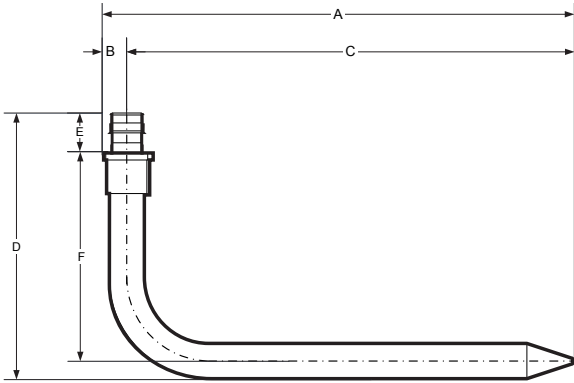


| ProPEX LF copper stub ells                |           | A                                | B                              | C     | D                               | E                              | F                               |
|---|-----------|----------------------------------|--------------------------------|-------|---------------------------------|--------------------------------|---------------------------------|
| Description                               | Part no.  | in/mm                            | in/mm                          | in/mm | in/mm                           | in/mm                          | in/mm                           |
| ½" PEX LF brass x ½" copper,<br>3½" x 8"  | LF2865050 | 8 <sup>3</sup> / <sub>8</sub>    | ¾                              | 8     | 4 <sup>3</sup> / <sub>4</sub>   | 1 <sup>1</sup> / <sub>16</sub> | 3 <sup>3</sup> / <sub>4</sub>   |
|   |           | 213                              | 10                             | 203   | 121                             | 18                             | 95                              |
| ½" PEX LF brass x ½" copper,<br>13" x 8"  | LF2855050 | 8 <sup>3</sup> / <sub>8</sub>    | ¾                              | 8     | 13 <sup>3</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 12 <sup>5</sup> / <sub>16</sub> |
|   |           | 213                              | 10                             | 203   | 338                             | 18                             | 312                             |
| ½" PEX LF brass x ½" copper,<br>8" x 13"  | LF2895050 | 13 <sup>3</sup> / <sub>8</sub>   | ¾                              | 13    | 13 <sup>3</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 7 <sup>5</sup> / <sub>16</sub>  |
|   |           | 340                              | 10                             | 330   | 338                             | 18                             | 185                             |
| ¾" PEX LF brass x ¾" copper,<br>4" x 8"   | LF2897575 | 8 <sup>9</sup> / <sub>16</sub>   | 9 <sup>1</sup> / <sub>16</sub> | 8     | 5 <sup>7</sup> / <sub>16</sub>  | 1 <sup>5</sup> / <sub>16</sub> | 4 <sup>1</sup> / <sub>16</sub>  |
|   |           | 217                              | 14                             | 203   | 138                             | 24                             | 103                             |
| 1" PEX LF brass x 1" copper,<br>12" x 12" | LF2891010 | 13 <sup>11</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 13    | 16                              | 1 <sup>3</sup> / <sub>16</sub> | 14 <sup>1</sup> / <sub>4</sub>  |
|   |           | 347                              | 17                             | 330   | 406                             | 30                             | 362                             |

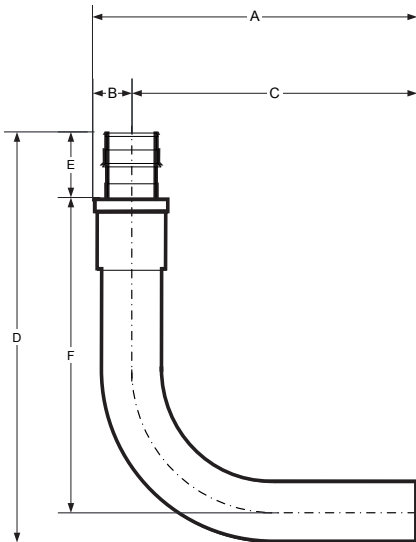


| ProPEX LF copper tub ells               |           | A                             | B     | C     | D                              | E                              | F                             |
|---|-----------|-------------------------------|-------|-------|--------------------------------|--------------------------------|-------------------------------|
| Description                             | Part no.  | in/mm                         | in/mm | in/mm | in/mm                          | in/mm                          | in/mm                         |
| ½" PEX LF brass x ½" copper,<br>3" x 6" | LF2875050 | 3 <sup>3</sup> / <sub>8</sub> | ¾     | 3     | 6 <sup>9</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 5 <sup>1</sup> / <sub>4</sub> |
|   |           | 86                            | 10    | 76    | 160                            | 18                             | 134                           |
| ½" PEX LF brass x ½" copper,<br>3" x 4" | LF2885050 | 3 <sup>3</sup> / <sub>8</sub> | ¾     | 3     | 4 <sup>9</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 3 <sup>1</sup> / <sub>4</sub> |
|   |           | 86                            | 10    | 76    | 109                            | 18                             | 83                            |

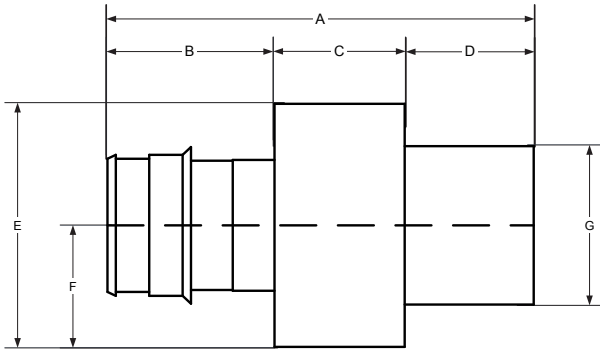

| ProPEX LF brass CPVC spigot adapters |           | A                               | B                               | C                              | D                              | E                             | F                              | G                             |
|--------------------------------------|-----------|---------------------------------|---------------------------------|--------------------------------|--------------------------------|-------------------------------|--------------------------------|-------------------------------|
| Description                          | Part no.  | in/mm                           | in/mm                           | in/mm                          | in/mm                          | in/mm                         | in/mm                          | in/mm                         |
| 1¼" PEX x 1¼" CPVC (CTS)             | CP4501313 | 3 <sup>11</sup> / <sub>16</sub> | 1 <sup>7</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 2 <sup>1</sup> / <sub>8</sub> | 1 <sup>1</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>8</sub> |
|                                      |           | 94                              | 37                              | 29                             | 29                             | 54                            | 27                             | 35                            |
| 1½" PEX x 1½" CPVC (CTS)             | CP4501515 | 4 <sup>3</sup> / <sub>16</sub>  | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> | 2 <sup>3</sup> / <sub>8</sub> | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>8</sub> |
|                                      |           | 107                             | 43                              | 30                             | 34                             | 61                            | 30                             | 41                            |
| 2" PEX x 2" CPVC (CTS)               | CP4502020 | 5 <sup>3</sup> / <sub>16</sub>  | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>3</sup> / <sub>4</sub>  | 3                             | 1 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>8</sub> |
|                                      |           | 134                             | 55                              | 36                             | 44                             | 76                            | 38                             | 54                            |

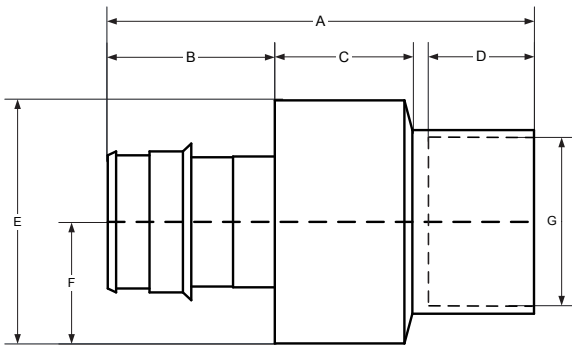

| ProPEX LF brass CPVC socket adapters |           | A                               | B                               | C                             | D                              | E                             | F                              | G                             |
|--------------------------------------|-----------|---------------------------------|---------------------------------|-------------------------------|--------------------------------|-------------------------------|--------------------------------|-------------------------------|
| Description                          | Part no.  | in/mm                           | in/mm                           | in/mm                         | in/mm                          | in/mm                         | in/mm                          | in/mm                         |
| 1¼" PEX x 1¼" CPVC (CTS)             | CP4511313 | 3 <sup>11</sup> / <sub>16</sub> | 1 <sup>7</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>4</sub> | 1                              | 2 <sup>1</sup> / <sub>8</sub> | 1 <sup>1</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>8</sub> |
|                                      |           | 94                              | 37                              | 31                            | 26                             | 54                            | 27                             | 35                            |
| 1½" PEX x 1½" CPVC (CTS)             | CP4511515 | 4 <sup>3</sup> / <sub>16</sub>  | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>4</sub> | 1 <sup>1</sup> / <sub>16</sub> | 2 <sup>1</sup> / <sub>8</sub> | 1 <sup>1</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>8</sub> |
|                                      |           | 106                             | 43                              | 32                            | 33                             | 61                            | 30                             | 42                            |
| 2" PEX x 2" CPVC (CTS)               | CP4512020 | 5 <sup>3</sup> / <sub>16</sub>  | 2 <sup>3</sup> / <sub>16</sub>  | 1 <sup>3</sup> / <sub>8</sub> | 2                              | 3                             | 1 <sup>1</sup> / <sub>2</sub>  | 2 <sup>1</sup> / <sub>8</sub> |
|                                      |           | 133                             | 55                              | 38                            | 43                             | 76                            | 38                             | 54                            |

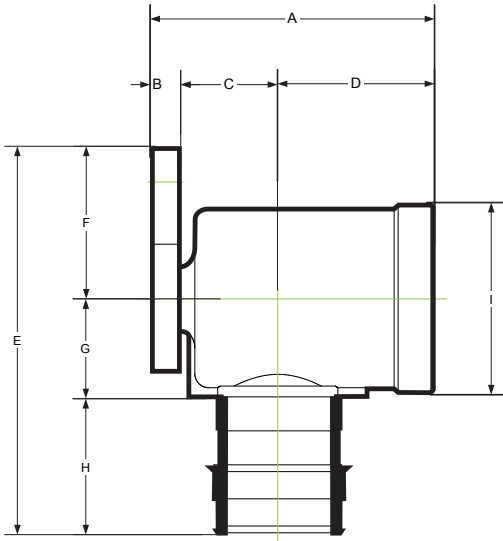

| ProPEX LF brass drop ear elbow |           | A                               | B     | C                              | D     | E                              | F                              | G                              | H                              | I                              |
|--------------------------------|-----------|---------------------------------|-------|--------------------------------|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Description                    | Part no.  | in/mm                           | in/mm | in/mm                          | in/mm | in/mm                          | in/mm                          | in/mm                          | in/mm                          | in/mm                          |
| ½" PEX x ½" FIP                | LF4235050 | 1 <sup>1</sup> / <sub>16</sub>  | ¼     | 7 <sup>7</sup> / <sub>16</sub> | 1     | 2 <sup>3</sup> / <sub>16</sub> | 1                              | 9 <sup>9</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> |
|                                |           | 43                              | 6     | 11                             | 26    | 56                             | 26                             | 14                             | 18                             | 26                             |
| ¾" PEX x ¾" FIP                | LF4237575 | 1 <sup>15</sup> / <sub>16</sub> | ¼     | ¾                              | 1     | 2 <sup>3</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> | 1 <sup>3</sup> / <sub>8</sub>  |
|                                |           | 49                              | 6     | 18                             | 26    | 71                             | 29                             | 17                             | 24                             | 35                             |
| 1" PEX x ¾" FIP                | LF4231010 | 2 <sup>7</sup> / <sub>16</sub>  | ¼     | 7 <sup>7</sup> / <sub>8</sub>  | 1¼    | 3 <sup>5</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> | 7 <sup>7</sup> / <sub>8</sub>  | 1 <sup>3</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>8</sub>  |
|                                |           | 62                              | 6     | 22                             | 33    | 84                             | 33                             | 22                             | 30                             | 42                             |



# Appendix E:

## Expansion arm and loop calculations

### Thermal expansion in underground applications

For direct-burial applications, mitigate the effects of thermal expansion with a proper installation that provides adequate resistance to axial

stress. Per PPI TR-21 *Thermal Expansion and Contraction in Plastics Piping Systems*, restrain a buried or concrete-encased pipe from both lateral and axial movement with surrounding embedment material. The magnitude of the frictional restraining force

is dependent on the nature of the soil and on installation and operating conditions.

For example, the extent of compaction near the pipe can affect the quality of contact between the pipe and surrounding soil. The

anchoring or restraining effect of surrounding soil on pipe movement can be significantly augmented by external pipe geometry. Tees, lateral connections and changes in direction all help to anchor a pipe in the surrounding soil.

### PEX with PEX-a Pipe Support, strut and strut clamps

has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m)

#### ½" PEX pipe expansion arm

|  | Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--|--------------|----------|--------------|--------------------------|---------|---------|
| PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m). | 10           | 50       | 0.04         | 1.90                     | 0.38    | 0.76    |
|  |              | 60       | 0.048        | 2.08                     | 0.42    | 0.83    |
|  |              | 70       | 0.056        | 2.24                     | 0.45    | 0.90    |
|  |              | 80       | 0.064        | 2.40                     | 0.48    | 0.96    |
|  |              | 90       | 0.072        | 2.55                     | 0.51    | 1.02    |
|  |              | 100      | 0.08         | 2.68                     | 0.54    | 1.07    |
|  | 20           | 50       | 0.08         | 2.68                     | 0.54    | 1.07    |
|  |              | 60       | 0.096        | 2.94                     | 0.59    | 1.18    |
|  |              | 70       | 0.112        | 3.17                     | 0.63    | 1.27    |
|  |              | 80       | 0.128        | 3.39                     | 0.68    | 1.36    |
|  |              | 90       | 0.144        | 3.60                     | 0.72    | 1.44    |
|  |              | 100      | 0.16         | 3.79                     | 0.76    | 1.52    |
|  | 30           | 50       | 0.12         | 3.29                     | 0.66    | 1.31    |
|  |              | 60       | 0.144        | 3.60                     | 0.72    | 1.44    |
|  |              | 70       | 0.168        | 3.89                     | 0.78    | 1.56    |
|  |              | 80       | 0.192        | 4.16                     | 0.83    | 1.66    |
|  |              | 90       | 0.216        | 4.41                     | 0.88    | 1.76    |
|  |              | 100      | 0.24         | 4.65                     | 0.93    | 1.86    |
|  | 40           | 50       | 0.16         | 3.79                     | 0.76    | 1.52    |
|  |              | 60       | 0.192        | 4.16                     | 0.83    | 1.66    |
| 70   |              | 0.224    | 4.49         | 0.90                     | 1.80    |         |
| 80   |              | 0.256    | 4.80         | 0.96                     | 1.92    |         |
| 90   |              | 0.288    | 5.09         | 1.02                     | 2.04    |         |
| 100  |              | 0.32     | 5.37         | 1.07                     | 2.15    |         |

#### ½" PEX pipe expansion arm

|  | Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--|--------------|----------|--------------|--------------------------|---------|---------|
| PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m). | 50           | 50       | 0.2          | 4.24                     | 0.85    | 1.70    |
|  |              | 60       | 0.24         | 4.65                     | 0.93    | 1.86    |
|  |              | 70       | 0.28         | 5.02                     | 1.00    | 2.01    |
|  |              | 80       | 0.32         | 5.37                     | 1.07    | 2.15    |
|  |              | 90       | 0.36         | 5.69                     | 1.14    | 2.28    |
|  |              | 100      | 0.4          | 6.00                     | 1.20    | 2.40    |
|  | 60           | 50       | 0.24         | 4.65                     | 0.93    | 1.86    |
|  |              | 60       | 0.288        | 5.09                     | 1.02    | 2.04    |
|  |              | 70       | 0.336        | 5.50                     | 1.10    | 2.20    |
|  |              | 80       | 0.384        | 5.88                     | 1.18    | 2.35    |
|  |              | 90       | 0.432        | 6.24                     | 1.25    | 2.49    |
|  |              | 100      | 0.48         | 6.57                     | 1.31    | 2.63    |
|  | 70           | 50       | 0.28         | 5.02                     | 1.00    | 2.01    |
|  |              | 60       | 0.336        | 5.50                     | 1.10    | 2.20    |
|  |              | 70       | 0.392        | 5.94                     | 1.19    | 2.38    |
|  |              | 80       | 0.448        | 6.35                     | 1.27    | 2.54    |
|  |              | 90       | 0.504        | 6.73                     | 1.35    | 2.69    |
|  |              | 100      | 0.56         | 7.10                     | 1.42    | 2.84    |
|  | 80           | 50       | 0.32         | 5.37                     | 1.07    | 2.15    |
|  |              | 60       | 0.384        | 5.88                     | 1.18    | 2.35    |
| 70   |              | 0.448    | 6.35         | 1.27                     | 2.54    |         |
| 80   |              | 0.512    | 6.79         | 1.36                     | 2.72    |         |
| 90   |              | 0.576    | 7.20         | 1.44                     | 2.88    |         |
| 100  |              | 0.64     | 7.59         | 1.52                     | 3.04    |         |

Table E-1: PEX pipe expansion arm calculations ½" to 3"

### ½" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 90           | 50       | 0.36         | 5.69                     | 1.14    | 2.28    |
|              | 60       | 0.432        | 6.24                     | 1.25    | 2.49    |
|              | 70       | 0.504        | 6.73                     | 1.35    | 2.69    |
|              | 80       | 0.576        | 7.20                     | 1.44    | 2.88    |
|              | 90       | 0.648        | 7.64                     | 1.53    | 3.05    |
|              | 100      | 0.72         | 8.05                     | 1.61    | 3.22    |
| 100          | 50       | 0.4          | 6.00                     | 1.20    | 2.40    |
|              | 60       | 0.48         | 6.57                     | 1.31    | 2.63    |
|              | 70       | 0.56         | 7.10                     | 1.42    | 2.84    |
|              | 80       | 0.64         | 7.59                     | 1.52    | 3.04    |
|              | 90       | 0.72         | 8.05                     | 1.61    | 3.22    |
|              | 100      | 0.8          | 8.49                     | 1.70    | 3.39    |
| 110          | 50       | 0.44         | 6.29                     | 1.26    | 2.52    |
|              | 60       | 0.528        | 6.89                     | 1.38    | 2.76    |
|              | 70       | 0.616        | 7.45                     | 1.49    | 2.98    |
|              | 80       | 0.704        | 7.96                     | 1.59    | 3.18    |
|              | 90       | 0.792        | 8.44                     | 1.69    | 3.38    |
|              | 100      | 0.88         | 8.90                     | 1.78    | 3.56    |
| 120          | 50       | 0.48         | 6.57                     | 1.31    | 2.63    |
|              | 60       | 0.576        | 7.20                     | 1.44    | 2.88    |
|              | 70       | 0.672        | 7.78                     | 1.56    | 3.11    |
|              | 80       | 0.768        | 8.31                     | 1.66    | 3.33    |
|              | 90       | 0.864        | 8.82                     | 1.76    | 3.53    |
|              | 100      | 0.96         | 9.30                     | 1.86    | 3.72    |
| 130          | 50       | 0.52         | 6.84                     | 1.37    | 2.74    |
|              | 60       | 0.624        | 7.49                     | 1.50    | 3.00    |
|              | 70       | 0.728        | 8.09                     | 1.62    | 3.24    |
|              | 80       | 0.832        | 8.65                     | 1.73    | 3.46    |
|              | 90       | 0.936        | 9.18                     | 1.84    | 3.67    |
|              | 100      | 1.04         | 9.67                     | 1.93    | 3.87    |
| 140          | 50       | 0.56         | 7.10                     | 1.42    | 2.84    |
|              | 60       | 0.672        | 7.78                     | 1.56    | 3.11    |
|              | 70       | 0.784        | 8.40                     | 1.68    | 3.36    |
|              | 80       | 0.896        | 8.98                     | 1.80    | 3.59    |
|              | 90       | 1.008        | 9.52                     | 1.90    | 3.81    |
|              | 100      | 1.12         | 10.04                    | 2.01    | 4.02    |
| 150          | 50       | 0.6          | 7.35                     | 1.47    | 2.94    |
|              | 60       | 0.72         | 8.05                     | 1.61    | 3.22    |
|              | 70       | 0.84         | 8.69                     | 1.74    | 3.48    |
|              | 80       | 0.96         | 9.30                     | 1.86    | 3.72    |
|              | 90       | 1.08         | 9.86                     | 1.97    | 3.94    |
|              | 100      | 1.2          | 10.39                    | 2.08    | 4.16    |

### ½" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 160          | 50       | 0.64         | 7.59                     | 1.52    | 3.04    |
|              | 60       | 0.768        | 8.31                     | 1.66    | 3.33    |
|              | 70       | 0.896        | 8.98                     | 1.80    | 3.59    |
|              | 80       | 1.024        | 9.60                     | 1.92    | 3.84    |
|              | 90       | 1.152        | 10.18                    | 2.04    | 4.07    |
|              | 100      | 1.28         | 10.73                    | 2.15    | 4.29    |

### ¾" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.04         | 2.24                     | 0.45    | 0.90    |
|              | 60       | 0.048        | 2.46                     | 0.49    | 0.98    |
|              | 70       | 0.056        | 2.66                     | 0.53    | 1.06    |
|              | 80       | 0.064        | 2.84                     | 0.57    | 1.14    |
|              | 90       | 0.072        | 3.01                     | 0.60    | 1.20    |
|              | 100      | 0.08         | 3.17                     | 0.63    | 1.27    |
| 20           | 50       | 0.08         | 3.17                     | 0.63    | 1.27    |
|              | 60       | 0.096        | 3.48                     | 0.70    | 1.39    |
|              | 70       | 0.112        | 3.76                     | 0.75    | 1.50    |
|              | 80       | 0.128        | 4.02                     | 0.80    | 1.61    |
|              | 90       | 0.144        | 4.26                     | 0.85    | 1.70    |
|              | 100      | 0.16         | 4.49                     | 0.90    | 1.80    |
| 30           | 50       | 0.12         | 3.89                     | 0.78    | 1.56    |
|              | 60       | 0.144        | 4.26                     | 0.85    | 1.70    |
|              | 70       | 0.168        | 4.60                     | 0.92    | 1.84    |
|              | 80       | 0.192        | 4.92                     | 0.98    | 1.97    |
|              | 90       | 0.216        | 5.22                     | 1.04    | 2.09    |
|              | 100      | 0.24         | 5.50                     | 1.10    | 2.20    |
| 40           | 50       | 0.16         | 4.49                     | 0.90    | 1.80    |
|              | 60       | 0.192        | 4.92                     | 0.98    | 1.97    |
|              | 70       | 0.224        | 5.31                     | 1.06    | 2.13    |
|              | 80       | 0.256        | 5.68                     | 1.14    | 2.27    |
|              | 90       | 0.288        | 6.02                     | 1.20    | 2.41    |
|              | 100      | 0.32         | 6.35                     | 1.27    | 2.54    |
| 50           | 50       | 0.2          | 5.02                     | 1.00    | 2.01    |
|              | 60       | 0.24         | 5.50                     | 1.10    | 2.20    |
|              | 70       | 0.28         | 5.94                     | 1.19    | 2.38    |
|              | 80       | 0.32         | 6.35                     | 1.27    | 2.54    |
|              | 90       | 0.36         | 6.73                     | 1.35    | 2.69    |
|              | 100      | 0.4          | 7.10                     | 1.42    | 2.84    |

Table E-1: PEX pipe expansion arm calculations ½" to 3"

### ¾" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 60           | 50       | 0.24         | 5.50                     | 1.10    | 2.20    |
|              | 60       | 0.288        | 6.02                     | 1.20    | 2.41    |
|              | 70       | 0.336        | 6.51                     | 1.30    | 2.60    |
|              | 80       | 0.384        | 6.96                     | 1.39    | 2.78    |
|              | 90       | 0.432        | 7.38                     | 1.48    | 2.95    |
|              | 100      | 0.48         | 7.78                     | 1.56    | 3.11    |
| 70           | 50       | 0.28         | 5.94                     | 1.19    | 2.38    |
|              | 60       | 0.336        | 6.51                     | 1.30    | 2.60    |
|              | 70       | 0.392        | 7.03                     | 1.41    | 2.81    |
|              | 80       | 0.448        | 7.51                     | 1.50    | 3.01    |
|              | 90       | 0.504        | 7.97                     | 1.59    | 3.19    |
|              | 100      | 0.56         | 8.40                     | 1.68    | 3.36    |
| 80           | 50       | 0.32         | 6.35                     | 1.27    | 2.54    |
|              | 60       | 0.384        | 6.96                     | 1.39    | 2.78    |
|              | 70       | 0.448        | 7.51                     | 1.50    | 3.01    |
|              | 80       | 0.512        | 8.03                     | 1.61    | 3.21    |
|              | 90       | 0.576        | 8.52                     | 1.70    | 3.41    |
|              | 100      | 0.64         | 8.98                     | 1.80    | 3.59    |
| 90           | 50       | 0.36         | 6.73                     | 1.35    | 2.69    |
|              | 60       | 0.432        | 7.38                     | 1.48    | 2.95    |
|              | 70       | 0.504        | 7.97                     | 1.59    | 3.19    |
|              | 80       | 0.576        | 8.52                     | 1.70    | 3.41    |
|              | 90       | 0.648        | 9.04                     | 1.81    | 3.61    |
|              | 100      | 0.72         | 9.52                     | 1.90    | 3.81    |
| 100          | 50       | 0.4          | 7.10                     | 1.42    | 2.84    |
|              | 60       | 0.48         | 7.78                     | 1.56    | 3.11    |
|              | 70       | 0.56         | 8.40                     | 1.68    | 3.36    |
|              | 80       | 0.64         | 8.98                     | 1.80    | 3.59    |
|              | 90       | 0.72         | 9.52                     | 1.90    | 3.81    |
|              | 100      | 0.8          | 10.04                    | 2.01    | 4.02    |
| 110          | 50       | 0.44         | 7.45                     | 1.49    | 2.98    |
|              | 60       | 0.528        | 8.16                     | 1.63    | 3.26    |
|              | 70       | 0.616        | 8.81                     | 1.76    | 3.52    |
|              | 80       | 0.704        | 9.42                     | 1.88    | 3.77    |
|              | 90       | 0.792        | 9.99                     | 2.00    | 4.00    |
|              | 100      | 0.88         | 10.53                    | 2.11    | 4.21    |
| 120          | 50       | 0.48         | 7.78                     | 1.56    | 3.11    |
|              | 60       | 0.576        | 8.52                     | 1.70    | 3.41    |
|              | 70       | 0.672        | 9.20                     | 1.84    | 3.68    |
|              | 80       | 0.768        | 9.84                     | 1.97    | 3.93    |
|              | 90       | 0.864        | 10.43                    | 2.09    | 4.17    |
|              | 100      | 0.96         | 11.00                    | 2.20    | 4.40    |

### ¾" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 130          | 50       | 0.52         | 8.09                     | 1.62    | 3.24    |
|              | 60       | 0.624        | 8.87                     | 1.77    | 3.55    |
|              | 70       | 0.728        | 9.58                     | 1.92    | 3.83    |
|              | 80       | 0.832        | 10.24                    | 2.05    | 4.10    |
|              | 90       | 0.936        | 10.86                    | 2.17    | 4.34    |
|              | 100      | 1.04         | 11.45                    | 2.29    | 4.58    |
| 140          | 50       | 0.56         | 8.40                     | 1.68    | 3.36    |
|              | 60       | 0.672        | 9.20                     | 1.84    | 3.68    |
|              | 70       | 0.784        | 9.94                     | 1.99    | 3.98    |
|              | 80       | 0.896        | 10.63                    | 2.13    | 4.25    |
|              | 90       | 1.008        | 11.27                    | 2.25    | 4.51    |
|              | 100      | 1.12         | 11.88                    | 2.38    | 4.75    |
| 150          | 50       | 0.6          | 8.69                     | 1.74    | 3.48    |
|              | 60       | 0.72         | 9.52                     | 1.90    | 3.81    |
|              | 70       | 0.84         | 10.29                    | 2.06    | 4.12    |
|              | 80       | 0.96         | 11.00                    | 2.20    | 4.40    |
|              | 90       | 1.08         | 11.67                    | 2.33    | 4.67    |
|              | 100      | 1.2          | 12.30                    | 2.46    | 4.92    |
| 160          | 50       | 0.64         | 8.98                     | 1.80    | 3.59    |
|              | 60       | 0.768        | 9.84                     | 1.97    | 3.93    |
|              | 70       | 0.896        | 10.63                    | 2.13    | 4.25    |
|              | 80       | 1.024        | 11.36                    | 2.27    | 4.54    |
|              | 90       | 1.152        | 12.05                    | 2.41    | 4.82    |
|              | 100      | 1.28         | 12.70                    | 2.54    | 5.08    |

### 1" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.04         | 2.55                     | 0.51    | 1.02    |
|              | 60       | 0.048        | 2.79                     | 0.56    | 1.12    |
|              | 70       | 0.056        | 3.01                     | 0.60    | 1.20    |
|              | 80       | 0.064        | 3.22                     | 0.64    | 1.29    |
|              | 90       | 0.072        | 3.42                     | 0.68    | 1.37    |
|              | 100      | 0.08         | 3.60                     | 0.72    | 1.44    |
| 20           | 50       | 0.08         | 3.60                     | 0.72    | 1.44    |
|              | 60       | 0.096        | 3.94                     | 0.79    | 1.58    |
|              | 70       | 0.112        | 4.26                     | 0.85    | 1.70    |
|              | 80       | 0.128        | 4.55                     | 0.91    | 1.82    |
|              | 90       | 0.144        | 4.83                     | 0.97    | 1.93    |
|              | 100      | 0.16         | 5.09                     | 1.02    | 2.04    |

Table E-1: PEX pipe expansion arm calculations ½" to 3"

### 1" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 30           | 50       | 0.12         | 4.41                     | 0.88    | 1.76    |
|              | 60       | 0.144        | 4.83                     | 0.97    | 1.93    |
|              | 70       | 0.168        | 5.22                     | 1.04    | 2.09    |
|              | 80       | 0.192        | 5.58                     | 1.12    | 2.23    |
|              | 90       | 0.216        | 5.92                     | 1.18    | 2.37    |
|              | 100      | 0.24         | 6.24                     | 1.25    | 2.49    |
| 40           | 50       | 0.16         | 5.09                     | 1.02    | 2.04    |
|              | 60       | 0.048        | 2.79                     | 0.56    | 1.12    |
|              | 70       | 0.056        | 3.01                     | 0.60    | 1.20    |
|              | 80       | 0.064        | 3.22                     | 0.64    | 1.29    |
|              | 90       | 0.072        | 3.42                     | 0.68    | 1.37    |
|              | 100      | 0.08         | 3.60                     | 0.72    | 1.44    |
| 50           | 50       | 0.2          | 5.69                     | 1.14    | 2.28    |
|              | 60       | 0.24         | 6.24                     | 1.25    | 2.49    |
|              | 70       | 0.28         | 6.73                     | 1.35    | 2.69    |
|              | 80       | 0.32         | 7.20                     | 1.44    | 2.88    |
|              | 90       | 0.36         | 7.64                     | 1.53    | 3.05    |
|              | 100      | 0.4          | 8.05                     | 1.61    | 3.22    |
| 60           | 50       | 0.24         | 6.24                     | 1.25    | 2.49    |
|              | 60       | 0.288        | 6.83                     | 1.37    | 2.73    |
|              | 70       | 0.336        | 7.38                     | 1.48    | 2.95    |
|              | 80       | 0.384        | 7.89                     | 1.58    | 3.15    |
|              | 90       | 0.432        | 8.37                     | 1.67    | 3.35    |
|              | 100      | 0.48         | 8.82                     | 1.76    | 3.53    |
| 70           | 50       | 0.28         | 6.73                     | 1.35    | 2.69    |
|              | 60       | 0.336        | 7.38                     | 1.48    | 2.95    |
|              | 70       | 0.392        | 7.97                     | 1.59    | 3.19    |
|              | 80       | 0.448        | 8.52                     | 1.70    | 3.41    |
|              | 90       | 0.504        | 9.04                     | 1.81    | 3.61    |
|              | 100      | 0.56         | 9.52                     | 1.90    | 3.81    |
| 80           | 50       | 0.32         | 7.20                     | 1.44    | 2.88    |
|              | 60       | 0.384        | 7.89                     | 1.58    | 3.15    |
|              | 70       | 0.448        | 8.52                     | 1.70    | 3.41    |
|              | 80       | 0.512        | 9.11                     | 1.82    | 3.64    |
|              | 90       | 0.576        | 9.66                     | 1.93    | 3.86    |
|              | 100      | 0.64         | 10.18                    | 2.04    | 4.07    |
| 90           | 50       | 0.04         | 2.55                     | 0.51    | 1.02    |
|              | 60       | 0.048        | 2.79                     | 0.56    | 1.12    |
|              | 70       | 0.056        | 3.01                     | 0.60    | 1.20    |
|              | 80       | 0.064        | 3.22                     | 0.64    | 1.29    |
|              | 90       | 0.072        | 3.42                     | 0.68    | 1.37    |
|              | 100      | 0.08         | 3.60                     | 0.72    | 1.44    |

### 1" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 100          | 50       | 0.08         | 3.60                     | 0.72    | 1.44    |
|              | 60       | 0.096        | 3.94                     | 0.79    | 1.58    |
|              | 70       | 0.112        | 4.26                     | 0.85    | 1.70    |
|              | 80       | 0.128        | 4.55                     | 0.91    | 1.82    |
|              | 90       | 0.144        | 4.83                     | 0.97    | 1.93    |
|              | 100      | 0.16         | 5.09                     | 1.02    | 2.04    |
| 110          | 50       | 0.44         | 8.44                     | 1.69    | 3.38    |
|              | 60       | 0.528        | 9.25                     | 1.85    | 3.70    |
|              | 70       | 0.616        | 9.99                     | 2.00    | 4.00    |
|              | 80       | 0.704        | 10.68                    | 2.14    | 4.27    |
|              | 90       | 0.792        | 11.33                    | 2.27    | 4.53    |
|              | 100      | 0.88         | 11.94                    | 2.39    | 4.78    |
| 120          | 50       | 0.48         | 8.82                     | 1.76    | 3.53    |
|              | 60       | 0.576        | 9.66                     | 1.93    | 3.86    |
|              | 70       | 0.672        | 10.43                    | 2.09    | 4.17    |
|              | 80       | 0.768        | 11.15                    | 2.23    | 4.46    |
|              | 90       | 0.864        | 11.83                    | 2.37    | 4.73    |
|              | 100      | 0.96         | 12.47                    | 2.49    | 4.99    |
| 130          | 50       | 0.52         | 9.18                     | 1.84    | 3.67    |
|              | 60       | 0.624        | 10.05                    | 2.01    | 4.02    |
|              | 70       | 0.728        | 10.86                    | 2.17    | 4.34    |
|              | 80       | 0.832        | 11.61                    | 2.32    | 4.64    |
|              | 90       | 0.936        | 12.31                    | 2.46    | 4.93    |
|              | 100      | 1.04         | 12.98                    | 2.60    | 5.19    |
| 140          | 50       | 0.56         | 9.52                     | 1.90    | 3.81    |
|              | 60       | 0.672        | 10.43                    | 2.09    | 4.17    |
|              | 70       | 0.784        | 11.27                    | 2.25    | 4.51    |
|              | 80       | 0.896        | 12.05                    | 2.41    | 4.82    |
|              | 90       | 1.008        | 12.78                    | 2.56    | 5.11    |
|              | 100      | 1.12         | 13.47                    | 2.69    | 5.39    |
| 150          | 50       | 0.6          | 9.86                     | 1.97    | 3.94    |
|              | 60       | 0.72         | 10.80                    | 2.16    | 4.32    |
|              | 70       | 0.84         | 11.67                    | 2.33    | 4.67    |
|              | 80       | 0.96         | 12.47                    | 2.49    | 4.99    |
|              | 90       | 1.08         | 13.23                    | 2.65    | 5.29    |
|              | 100      | 1.2          | 13.94                    | 2.79    | 5.58    |
| 160          | 50       | 0.64         | 10.18                    | 2.04    | 4.07    |
|              | 60       | 0.768        | 11.15                    | 2.23    | 4.46    |
|              | 70       | 0.896        | 12.05                    | 2.41    | 4.82    |
|              | 80       | 1.024        | 12.88                    | 2.58    | 5.15    |
|              | 90       | 1.152        | 13.66                    | 2.73    | 5.46    |
|              | 100      | 1.28         | 14.40                    | 2.88    | 5.76    |

Table E-1: PEX pipe expansion arm calculations ½" to 3"

**1¼" PEX pipe expansion arm**

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.04         | 2.81                     | 0.56    | 1.13    |
|              | 60       | 0.048        | 3.08                     | 0.62    | 1.23    |
|              | 70       | 0.056        | 3.33                     | 0.67    | 1.33    |
|              | 80       | 0.064        | 3.56                     | 0.71    | 1.42    |
|              | 90       | 0.072        | 3.78                     | 0.76    | 1.51    |
|              | 100      | 0.08         | 3.98                     | 0.80    | 1.59    |
| 20           | 50       | 0.08         | 3.98                     | 0.80    | 1.59    |
|              | 60       | 0.096        | 4.36                     | 0.87    | 1.74    |
|              | 70       | 0.112        | 4.71                     | 0.94    | 1.88    |
|              | 80       | 0.128        | 5.03                     | 1.01    | 2.01    |
|              | 90       | 0.144        | 5.34                     | 1.07    | 2.14    |
|              | 100      | 0.16         | 5.63                     | 1.13    | 2.25    |
| 30           | 50       | 0.12         | 4.87                     | 0.97    | 1.95    |
|              | 60       | 0.144        | 5.34                     | 1.07    | 2.14    |
|              | 70       | 0.168        | 5.77                     | 1.15    | 2.31    |
|              | 80       | 0.192        | 6.17                     | 1.23    | 2.47    |
|              | 90       | 0.216        | 6.54                     | 1.31    | 2.62    |
|              | 100      | 0.24         | 6.89                     | 1.38    | 2.76    |
| 40           | 50       | 0.16         | 5.63                     | 1.13    | 2.25    |
|              | 60       | 0.192        | 6.17                     | 1.23    | 2.47    |
|              | 70       | 0.224        | 6.66                     | 1.33    | 2.66    |
|              | 80       | 0.256        | 7.12                     | 1.42    | 2.85    |
|              | 90       | 0.288        | 7.55                     | 1.51    | 3.02    |
|              | 100      | 0.32         | 7.96                     | 1.59    | 3.18    |
| 50           | 50       | 0.2          | 6.29                     | 1.26    | 2.52    |
|              | 60       | 0.24         | 6.89                     | 1.38    | 2.76    |
|              | 70       | 0.28         | 7.45                     | 1.49    | 2.98    |
|              | 80       | 0.32         | 7.96                     | 1.59    | 3.18    |
|              | 90       | 0.36         | 8.44                     | 1.69    | 3.38    |
|              | 100      | 0.4          | 8.90                     | 1.78    | 3.56    |
| 60           | 50       | 0.24         | 6.89                     | 1.38    | 2.76    |
|              | 60       | 0.288        | 7.55                     | 1.51    | 3.02    |
|              | 70       | 0.336        | 8.16                     | 1.63    | 3.26    |
|              | 80       | 0.384        | 8.72                     | 1.74    | 3.49    |
|              | 90       | 0.432        | 9.25                     | 1.85    | 3.70    |
|              | 100      | 0.48         | 9.75                     | 1.95    | 3.90    |
| 70           | 50       | 0.28         | 7.45                     | 1.49    | 2.98    |
|              | 60       | 0.336        | 8.16                     | 1.63    | 3.26    |
|              | 70       | 0.392        | 8.81                     | 1.76    | 3.52    |
|              | 80       | 0.448        | 9.42                     | 1.88    | 3.77    |
|              | 90       | 0.504        | 9.99                     | 2.00    | 4.00    |
|              | 100      | 0.56         | 10.53                    | 2.11    | 4.21    |

**1¼" PEX pipe expansion arm**

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 80           | 50       | 0.32         | 7.96                     | 1.59    | 3.18    |
|              | 60       | 0.384        | 8.72                     | 1.74    | 3.49    |
|              | 70       | 0.448        | 9.42                     | 1.88    | 3.77    |
|              | 80       | 0.512        | 10.07                    | 2.01    | 4.03    |
|              | 90       | 0.576        | 10.68                    | 2.14    | 4.27    |
|              | 100      | 0.64         | 11.26                    | 2.25    | 4.50    |
| 90           | 50       | 0.36         | 8.44                     | 1.69    | 3.38    |
|              | 60       | 0.432        | 9.25                     | 1.85    | 3.70    |
|              | 70       | 0.504        | 9.99                     | 2.00    | 4.00    |
|              | 80       | 0.576        | 10.68                    | 2.14    | 4.27    |
|              | 90       | 0.648        | 11.33                    | 2.27    | 4.53    |
|              | 100      | 0.72         | 11.94                    | 2.39    | 4.78    |
| 100          | 50       | 0.4          | 8.90                     | 1.78    | 3.56    |
|              | 60       | 0.48         | 9.75                     | 1.95    | 3.90    |
|              | 70       | 0.56         | 10.53                    | 2.11    | 4.21    |
|              | 80       | 0.64         | 11.26                    | 2.25    | 4.50    |
|              | 90       | 0.72         | 11.94                    | 2.39    | 4.78    |
|              | 100      | 0.8          | 12.59                    | 2.52    | 5.03    |
| 110          | 50       | 0.44         | 9.33                     | 1.87    | 3.73    |
|              | 60       | 0.528        | 10.22                    | 2.04    | 4.09    |
|              | 70       | 0.616        | 11.04                    | 2.21    | 4.42    |
|              | 80       | 0.704        | 11.81                    | 2.36    | 4.72    |
|              | 90       | 0.792        | 12.52                    | 2.50    | 5.01    |
|              | 100      | 0.88         | 13.20                    | 2.64    | 5.28    |
| 120          | 50       | 0.48         | 9.75                     | 1.95    | 3.90    |
|              | 60       | 0.576        | 10.68                    | 2.14    | 4.27    |
|              | 70       | 0.672        | 11.53                    | 2.31    | 4.61    |
|              | 80       | 0.768        | 12.33                    | 2.47    | 4.93    |
|              | 90       | 0.864        | 13.08                    | 2.62    | 5.23    |
|              | 100      | 0.96         | 13.79                    | 2.76    | 5.51    |
| 130          | 50       | 0.52         | 10.15                    | 2.03    | 4.06    |
|              | 60       | 0.624        | 11.12                    | 2.22    | 4.45    |
|              | 70       | 0.728        | 12.01                    | 2.40    | 4.80    |
|              | 80       | 0.832        | 12.83                    | 2.57    | 5.13    |
|              | 90       | 0.936        | 13.61                    | 2.72    | 5.45    |
|              | 100      | 1.04         | 14.35                    | 2.87    | 5.74    |
| 140          | 50       | 0.56         | 10.53                    | 2.11    | 4.21    |
|              | 60       | 0.672        | 11.53                    | 2.31    | 4.61    |
|              | 70       | 0.784        | 12.46                    | 2.49    | 4.98    |
|              | 80       | 0.896        | 13.32                    | 2.66    | 5.33    |
|              | 90       | 1.008        | 14.13                    | 2.83    | 5.65    |
|              | 100      | 1.12         | 14.89                    | 2.98    | 5.96    |

**Table E-1: PEX pipe expansion arm calculations ½" to 3"**

### 1¼" PEX pipe expansion arm

|   | Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|---|--------------|----------|--------------|--------------------------|---------|---------|
| PEX with PEX-a Pipe Support, strut and strut clamps | 150          | 50       | 0.6          | 10.90                    | 2.18    | 4.36    |
|   |              | 60       | 0.72         | 11.94                    | 2.39    | 4.78    |
|   |              | 70       | 0.84         | 12.90                    | 2.58    | 5.16    |
|   |              | 80       | 0.96         | 13.79                    | 2.76    | 5.51    |
|   |              | 90       | 1.08         | 14.62                    | 2.92    | 5.85    |
|   | 160          | 50       | 0.64         | 11.26                    | 2.25    | 4.50    |
|   |              | 60       | 0.768        | 12.33                    | 2.47    | 4.93    |
|   |              | 70       | 0.896        | 13.32                    | 2.66    | 5.33    |
|   |              | 80       | 1.024        | 14.24                    | 2.85    | 5.70    |
|   |              | 90       | 1.152        | 15.10                    | 3.02    | 6.04    |
|   | 100          | 1.28     | 15.92        | 3.18                     | 6.37    |         |

### 1½" PEX pipe expansion arm

|  | Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--|--------------|----------|--------------|--------------------------|---------|---------|
| PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m). | 10           | 50       | 0.04         | 3.06                     | 0.61    | 1.22    |
|  |              | 60       | 0.048        | 3.35                     | 0.67    | 1.34    |
|  |              | 70       | 0.056        | 3.62                     | 0.72    | 1.45    |
|  |              | 80       | 0.064        | 3.87                     | 0.77    | 1.55    |
|  |              | 90       | 0.072        | 4.10                     | 0.82    | 1.64    |
|  |              | 100      | 0.08         | 4.33                     | 0.87    | 1.73    |
|  | 20           | 50       | 0.08         | 4.33                     | 0.87    | 1.73    |
|  |              | 60       | 0.096        | 4.74                     | 0.95    | 1.90    |
|  |              | 70       | 0.112        | 5.12                     | 1.02    | 2.05    |
|  |              | 80       | 0.128        | 5.47                     | 1.09    | 2.19    |
|  |              | 90       | 0.144        | 5.80                     | 1.16    | 2.32    |
|  |              | 100      | 0.16         | 6.12                     | 1.22    | 2.45    |
|  | 30           | 50       | 0.12         | 5.30                     | 1.06    | 2.12    |
|  |              | 60       | 0.144        | 5.80                     | 1.16    | 2.32    |
|  |              | 70       | 0.168        | 6.27                     | 1.25    | 2.51    |
|  |              | 80       | 0.192        | 6.70                     | 1.34    | 2.68    |
|  |              | 90       | 0.216        | 7.11                     | 1.42    | 2.84    |
|  |              | 100      | 0.24         | 7.49                     | 1.50    | 3.00    |
|  | 40           | 50       | 0.16         | 6.12                     | 1.22    | 2.45    |
|  |              | 60       | 0.192        | 6.70                     | 1.34    | 2.68    |
|  |              | 70       | 0.224        | 7.24                     | 1.45    | 2.90    |
|  |              | 80       | 0.256        | 7.74                     | 1.55    | 3.10    |
|  |              | 90       | 0.288        | 8.21                     | 1.64    | 3.28    |
|  |              | 100      | 0.32         | 8.65                     | 1.73    | 3.46    |

### 1½" PEX pipe expansion arm

|  | Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--|--------------|----------|--------------|--------------------------|---------|---------|
| PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m). | 50           | 50       | 0.2          | 6.84                     | 1.37    | 2.74    |
|  |              | 60       | 0.24         | 7.49                     | 1.50    | 3.00    |
|  |              | 70       | 0.28         | 8.09                     | 1.62    | 3.24    |
|  |              | 80       | 0.32         | 8.65                     | 1.73    | 3.46    |
|  |              | 90       | 0.36         | 9.18                     | 1.84    | 3.67    |
|  | 60           | 50       | 0.24         | 7.49                     | 1.50    | 3.00    |
|  |              | 60       | 0.288        | 8.21                     | 1.64    | 3.28    |
|  |              | 70       | 0.336        | 8.87                     | 1.77    | 3.55    |
|  |              | 80       | 0.384        | 9.48                     | 1.90    | 3.79    |
|  |              | 90       | 0.432        | 10.05                    | 2.01    | 4.02    |
|  | 70           | 100      | 0.48         | 10.60                    | 2.12    | 4.24    |
|  |              | 50       | 0.28         | 8.09                     | 1.62    | 3.24    |
|  |              | 60       | 0.336        | 8.87                     | 1.77    | 3.55    |
|  |              | 70       | 0.392        | 9.58                     | 1.92    | 3.83    |
|  |              | 80       | 0.448        | 10.24                    | 2.05    | 4.10    |
|  | 80           | 90       | 0.504        | 10.86                    | 2.17    | 4.34    |
|  |              | 100      | 0.56         | 11.45                    | 2.29    | 4.58    |
|  |              | 50       | 0.32         | 8.65                     | 1.73    | 3.46    |
|  |              | 60       | 0.384        | 9.48                     | 1.90    | 3.79    |
|  |              | 70       | 0.448        | 10.24                    | 2.05    | 4.10    |
|  | 90           | 80       | 0.512        | 10.95                    | 2.19    | 4.38    |
|  |              | 90       | 0.576        | 11.61                    | 2.32    | 4.64    |
|  |              | 100      | 0.64         | 12.24                    | 2.45    | 4.90    |
|  |              | 50       | 0.36         | 9.18                     | 1.84    | 3.67    |
|  |              | 60       | 0.432        | 10.05                    | 2.01    | 4.02    |
|  | 100          | 70       | 0.504        | 10.86                    | 2.17    | 4.34    |
|  |              | 80       | 0.576        | 11.61                    | 2.32    | 4.64    |
|  |              | 90       | 0.648        | 12.31                    | 2.46    | 4.93    |
|  |              | 100      | 0.72         | 12.98                    | 2.60    | 5.19    |
|  |              | 50       | 0.4          | 9.67                     | 1.93    | 3.87    |
|  | 110          | 60       | 0.48         | 10.60                    | 2.12    | 4.24    |
|  |              | 70       | 0.56         | 11.45                    | 2.29    | 4.58    |
|  |              | 80       | 0.64         | 12.24                    | 2.45    | 4.90    |
|  |              | 90       | 0.72         | 12.98                    | 2.60    | 5.19    |
|  |              | 100      | 0.8          | 13.68                    | 2.74    | 5.47    |
|  |              | 50       | 0.44         | 10.15                    | 2.03    | 4.06    |
|  |              | 60       | 0.528        | 11.12                    | 2.22    | 4.45    |
|  |              | 70       | 0.616        | 12.01                    | 2.40    | 4.80    |
|  |              | 80       | 0.704        | 12.83                    | 2.57    | 5.13    |
|  |              | 90       | 0.792        | 13.61                    | 2.72    | 5.45    |
|  |              | 100      | 0.88         | 14.35                    | 2.87    | 5.74    |

Table E-1: PEX pipe expansion arm calculations ½" to 3"

### 1½" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 120          | 50       | 0.48         | 10.60                    | 2.12    | 4.24    |
|              | 60       | 0.576        | 11.61                    | 2.32    | 4.64    |
|              | 70       | 0.672        | 12.54                    | 2.51    | 5.02    |
|              | 80       | 0.768        | 13.41                    | 2.68    | 5.36    |
|              | 90       | 0.864        | 14.22                    | 2.84    | 5.69    |
|              | 100      | 0.96         | 14.99                    | 3.00    | 6.00    |
| 130          | 50       | 0.52         | 11.03                    | 2.21    | 4.41    |
|              | 60       | 0.624        | 12.08                    | 2.42    | 4.83    |
|              | 70       | 0.728        | 13.05                    | 2.61    | 5.22    |
|              | 80       | 0.832        | 13.95                    | 2.79    | 5.58    |
|              | 90       | 0.936        | 14.80                    | 2.96    | 5.92    |
|              | 100      | 1.04         | 15.60                    | 3.12    | 6.24    |
| 140          | 50       | 0.56         | 11.45                    | 2.29    | 4.58    |
|              | 60       | 0.672        | 12.54                    | 2.51    | 5.02    |
|              | 70       | 0.784        | 13.54                    | 2.71    | 5.42    |
|              | 80       | 0.896        | 14.48                    | 2.90    | 5.79    |
|              | 90       | 1.008        | 15.36                    | 3.07    | 6.14    |
|              | 100      | 1.12         | 16.19                    | 3.24    | 6.48    |
| 150          | 50       | 0.6          | 11.85                    | 2.37    | 4.74    |
|              | 60       | 0.72         | 12.98                    | 2.60    | 5.19    |
|              | 70       | 0.84         | 14.02                    | 2.80    | 5.61    |
|              | 80       | 0.96         | 14.99                    | 3.00    | 6.00    |
|              | 90       | 1.08         | 15.90                    | 3.18    | 6.36    |
|              | 100      | 1.2          | 16.76                    | 3.35    | 6.70    |
| 160          | 50       | 0.64         | 12.24                    | 2.45    | 4.90    |
|              | 60       | 0.768        | 13.41                    | 2.68    | 5.36    |
|              | 70       | 0.896        | 14.48                    | 2.90    | 5.79    |
|              | 80       | 1.024        | 15.48                    | 3.10    | 6.19    |
|              | 90       | 1.152        | 16.42                    | 3.28    | 6.57    |
|              | 100      | 1.28         | 17.31                    | 3.46    | 6.92    |

### 2" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 20           | 50       | 0.08         | 4.95                     | 0.99    | 1.98    |
|              | 60       | 0.096        | 5.42                     | 1.08    | 2.17    |
|              | 70       | 0.112        | 5.85                     | 1.17    | 2.34    |
|              | 80       | 0.128        | 6.26                     | 1.25    | 2.50    |
|              | 90       | 0.144        | 6.64                     | 1.33    | 2.66    |
|              | 100      | 0.16         | 7.00                     | 1.40    | 2.80    |
| 30           | 50       | 0.12         | 6.06                     | 1.21    | 2.42    |
|              | 60       | 0.144        | 6.64                     | 1.33    | 2.66    |
|              | 70       | 0.168        | 7.17                     | 1.43    | 2.87    |
|              | 80       | 0.192        | 7.66                     | 1.53    | 3.07    |
|              | 90       | 0.216        | 8.13                     | 1.63    | 3.25    |
|              | 100      | 0.24         | 8.57                     | 1.71    | 3.43    |
| 40           | 50       | 0.16         | 7.00                     | 1.40    | 2.80    |
|              | 60       | 0.192        | 7.66                     | 1.53    | 3.07    |
|              | 70       | 0.224        | 8.28                     | 1.66    | 3.31    |
|              | 80       | 0.256        | 8.85                     | 1.77    | 3.54    |
|              | 90       | 0.288        | 9.39                     | 1.88    | 3.76    |
|              | 100      | 0.32         | 9.90                     | 1.98    | 3.96    |
| 50           | 50       | 0.2          | 7.82                     | 1.56    | 3.13    |
|              | 60       | 0.24         | 8.57                     | 1.71    | 3.43    |
|              | 70       | 0.28         | 9.26                     | 1.85    | 3.70    |
|              | 80       | 0.32         | 9.90                     | 1.98    | 3.96    |
|              | 90       | 0.36         | 10.50                    | 2.10    | 4.20    |
|              | 100      | 0.4          | 11.06                    | 2.21    | 4.43    |
| 60           | 50       | 0.24         | 8.57                     | 1.71    | 3.43    |
|              | 60       | 0.288        | 9.39                     | 1.88    | 3.76    |
|              | 70       | 0.336        | 10.14                    | 2.03    | 4.06    |
|              | 80       | 0.384        | 10.84                    | 2.17    | 4.34    |
|              | 90       | 0.432        | 11.50                    | 2.30    | 4.60    |
|              | 100      | 0.48         | 12.12                    | 2.42    | 4.85    |
| 70           | 50       | 0.28         | 9.26                     | 1.85    | 3.70    |
|              | 60       | 0.336        | 10.14                    | 2.03    | 4.06    |
|              | 70       | 0.392        | 10.95                    | 2.19    | 4.38    |
|              | 80       | 0.448        | 11.71                    | 2.34    | 4.68    |
|              | 90       | 0.504        | 12.42                    | 2.48    | 4.97    |
|              | 100      | 0.56         | 13.09                    | 2.62    | 5.24    |
| 80           | 50       | 0.32         | 9.90                     | 1.98    | 3.96    |
|              | 60       | 0.384        | 10.84                    | 2.17    | 4.34    |
|              | 70       | 0.448        | 11.71                    | 2.34    | 4.68    |
|              | 80       | 0.512        | 12.52                    | 2.50    | 5.01    |
|              | 90       | 0.576        | 13.28                    | 2.66    | 5.31    |
|              | 100      | 0.64         | 13.99                    | 2.80    | 5.60    |

### 2" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.04         | 3.50                     | 0.70    | 1.40    |
|              | 60       | 0.048        | 3.83                     | 0.77    | 1.53    |
|              | 70       | 0.056        | 4.14                     | 0.83    | 1.66    |
|              | 80       | 0.064        | 4.43                     | 0.89    | 1.77    |
|              | 90       | 0.072        | 4.69                     | 0.94    | 1.88    |
|              | 100      | 0.08         | 4.95                     | 0.99    | 1.98    |

Table E-1: PEX pipe expansion arm calculations ½" to 3"

### 2" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 90           | 50       | 0.36         | 10.50                    | 2.10    | 4.20    |
|              | 60       | 0.432        | 11.50                    | 2.30    | 4.60    |
|              | 70       | 0.504        | 12.42                    | 2.48    | 4.97    |
|              | 80       | 0.576        | 13.28                    | 2.66    | 5.31    |
|              | 90       | 0.648        | 14.08                    | 2.82    | 5.63    |
|              | 100      | 0.72         | 14.84                    | 2.97    | 5.94    |
| 100          | 50       | 0.4          | 11.06                    | 2.21    | 4.43    |
|              | 60       | 0.48         | 12.12                    | 2.42    | 4.85    |
|              | 70       | 0.56         | 13.09                    | 2.62    | 5.24    |
|              | 80       | 0.64         | 13.99                    | 2.80    | 5.60    |
|              | 90       | 0.72         | 14.84                    | 2.97    | 5.94    |
|              | 100      | 0.8          | 15.65                    | 3.13    | 6.26    |
| 110          | 50       | 0.44         | 11.60                    | 2.32    | 4.64    |
|              | 60       | 0.528        | 12.71                    | 2.54    | 5.08    |
|              | 70       | 0.616        | 13.73                    | 2.75    | 5.49    |
|              | 80       | 0.704        | 14.68                    | 2.94    | 5.87    |
|              | 90       | 0.792        | 15.57                    | 3.11    | 6.23    |
|              | 100      | 0.88         | 16.41                    | 3.28    | 6.56    |
| 120          | 50       | 0.48         | 12.12                    | 2.42    | 4.85    |
|              | 60       | 0.576        | 13.28                    | 2.66    | 5.31    |
|              | 70       | 0.672        | 14.34                    | 2.87    | 5.74    |
|              | 80       | 0.768        | 15.33                    | 3.07    | 6.13    |
|              | 90       | 0.864        | 16.26                    | 3.25    | 6.50    |
|              | 100      | 0.96         | 17.14                    | 3.43    | 6.86    |
| 130          | 50       | 0.52         | 12.61                    | 2.52    | 5.05    |
|              | 60       | 0.624        | 13.82                    | 2.76    | 5.53    |
|              | 70       | 0.728        | 14.93                    | 2.99    | 5.97    |
|              | 80       | 0.832        | 15.96                    | 3.19    | 6.38    |
|              | 90       | 0.936        | 16.92                    | 3.38    | 6.77    |
|              | 100      | 1.04         | 17.84                    | 3.57    | 7.14    |
| 140          | 50       | 0.56         | 13.09                    | 2.62    | 5.24    |
|              | 60       | 0.672        | 14.34                    | 2.87    | 5.74    |
|              | 70       | 0.784        | 15.49                    | 3.10    | 6.20    |
|              | 80       | 0.896        | 16.56                    | 3.31    | 6.62    |
|              | 90       | 1.008        | 17.56                    | 3.51    | 7.03    |
|              | 100      | 1.12         | 18.51                    | 3.70    | 7.41    |
| 150          | 50       | 0.6          | 13.55                    | 2.71    | 5.42    |
|              | 60       | 0.72         | 14.84                    | 2.97    | 5.94    |
|              | 70       | 0.84         | 16.03                    | 3.21    | 6.41    |
|              | 80       | 0.96         | 17.14                    | 3.43    | 6.86    |
|              | 90       | 1.08         | 18.18                    | 3.64    | 7.27    |
|              | 100      | 1.2          | 19.16                    | 3.83    | 7.66    |

### 2" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 160          | 50       | 0.64         | 13.99                    | 2.80    | 5.60    |
|              | 60       | 0.768        | 15.33                    | 3.07    | 6.13    |
|              | 70       | 0.896        | 16.56                    | 3.31    | 6.62    |
|              | 80       | 1.024        | 17.70                    | 3.54    | 7.08    |
|              | 90       | 1.152        | 18.78                    | 3.76    | 7.51    |
|              | 100      | 1.28         | 19.79                    | 3.96    | 7.92    |

### 2½" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.04         | 3.89                     | 0.78    | 1.56    |
|              | 60       | 0.048        | 4.26                     | 0.85    | 1.70    |
|              | 70       | 0.056        | 4.60                     | 0.92    | 1.84    |
|              | 80       | 0.064        | 4.92                     | 0.98    | 1.97    |
|              | 90       | 0.072        | 5.22                     | 1.04    | 2.09    |
|              | 100      | 0.08         | 5.50                     | 1.10    | 2.20    |
| 20           | 50       | 0.08         | 5.50                     | 1.10    | 2.20    |
|              | 60       | 0.096        | 6.02                     | 1.20    | 2.41    |
|              | 70       | 0.112        | 6.51                     | 1.30    | 2.60    |
|              | 80       | 0.128        | 6.96                     | 1.39    | 2.78    |
|              | 90       | 0.144        | 7.38                     | 1.48    | 2.95    |
|              | 100      | 0.16         | 7.78                     | 1.56    | 3.11    |
| 30           | 50       | 0.12         | 6.73                     | 1.35    | 2.69    |
|              | 60       | 0.144        | 7.38                     | 1.48    | 2.95    |
|              | 70       | 0.168        | 7.97                     | 1.59    | 3.19    |
|              | 80       | 0.192        | 8.52                     | 1.70    | 3.41    |
|              | 90       | 0.216        | 9.04                     | 1.81    | 3.61    |
|              | 100      | 0.24         | 9.52                     | 1.90    | 3.81    |
| 40           | 50       | 0.16         | 7.78                     | 1.56    | 3.11    |
|              | 60       | 0.192        | 8.52                     | 1.70    | 3.41    |
|              | 70       | 0.224        | 9.20                     | 1.84    | 3.68    |
|              | 80       | 0.256        | 9.84                     | 1.97    | 3.93    |
|              | 90       | 0.288        | 10.43                    | 2.09    | 4.17    |
|              | 100      | 0.32         | 11.00                    | 2.20    | 4.40    |
| 50           | 50       | 0.2          | 8.69                     | 1.74    | 3.48    |
|              | 60       | 0.24         | 9.52                     | 1.90    | 3.81    |
|              | 70       | 0.28         | 10.29                    | 2.06    | 4.12    |
|              | 80       | 0.32         | 11.00                    | 2.20    | 4.40    |
|              | 90       | 0.36         | 11.67                    | 2.33    | 4.67    |
|              | 100      | 0.4          | 12.30                    | 2.46    | 4.92    |

Table E-1: PEX pipe expansion arm calculations ½" to 3"



### 2½" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 60           | 50       | 0.24         | 9.52                     | 1.90    | 3.81    |
|              | 60       | 0.288        | 10.43                    | 2.09    | 4.17    |
|              | 70       | 0.336        | 11.27                    | 2.25    | 4.51    |
|              | 80       | 0.384        | 12.05                    | 2.41    | 4.82    |
|              | 90       | 0.432        | 12.78                    | 2.56    | 5.11    |
|              | 100      | 0.48         | 13.47                    | 2.69    | 5.39    |
| 70           | 50       | 0.28         | 10.29                    | 2.06    | 4.12    |
|              | 60       | 0.336        | 11.27                    | 2.25    | 4.51    |
|              | 70       | 0.392        | 12.17                    | 2.43    | 4.87    |
|              | 80       | 0.448        | 13.01                    | 2.60    | 5.21    |
|              | 90       | 0.504        | 13.80                    | 2.76    | 5.52    |
|              | 100      | 0.56         | 14.55                    | 2.91    | 5.82    |
| 80           | 50       | 0.32         | 11.00                    | 2.20    | 4.40    |
|              | 60       | 0.384        | 12.05                    | 2.41    | 4.82    |
|              | 70       | 0.448        | 13.01                    | 2.60    | 5.21    |
|              | 80       | 0.512        | 13.91                    | 2.78    | 5.56    |
|              | 90       | 0.576        | 14.76                    | 2.95    | 5.90    |
|              | 100      | 0.64         | 15.55                    | 3.11    | 6.22    |
| 90           | 50       | 0.36         | 11.67                    | 2.33    | 4.67    |
|              | 60       | 0.432        | 12.78                    | 2.56    | 5.11    |
|              | 70       | 0.504        | 13.80                    | 2.76    | 5.52    |
|              | 80       | 0.576        | 14.76                    | 2.95    | 5.90    |
|              | 90       | 0.648        | 15.65                    | 3.13    | 6.26    |
|              | 100      | 0.72         | 16.50                    | 3.30    | 6.60    |
| 100          | 50       | 0.4          | 12.30                    | 2.46    | 4.92    |
|              | 60       | 0.48         | 13.47                    | 2.69    | 5.39    |
|              | 70       | 0.56         | 14.55                    | 2.91    | 5.82    |
|              | 80       | 0.64         | 15.55                    | 3.11    | 6.22    |
|              | 90       | 0.72         | 16.50                    | 3.30    | 6.60    |
|              | 100      | 0.8          | 17.39                    | 3.48    | 6.96    |
| 110          | 50       | 0.44         | 12.90                    | 2.58    | 5.16    |
|              | 60       | 0.528        | 14.13                    | 2.83    | 5.65    |
|              | 70       | 0.616        | 15.26                    | 3.05    | 6.10    |
|              | 80       | 0.704        | 16.31                    | 3.26    | 6.53    |
|              | 90       | 0.792        | 17.30                    | 3.46    | 6.92    |
|              | 100      | 0.88         | 18.24                    | 3.65    | 7.30    |
| 120          | 50       | 0.48         | 13.47                    | 2.69    | 5.39    |
|              | 60       | 0.576        | 14.76                    | 2.95    | 5.90    |
|              | 70       | 0.672        | 15.94                    | 3.19    | 6.38    |
|              | 80       | 0.768        | 17.04                    | 3.41    | 6.82    |
|              | 90       | 0.864        | 18.07                    | 3.61    | 7.23    |
|              | 100      | 0.96         | 19.05                    | 3.81    | 7.62    |

### 2½" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 130          | 50       | 0.52         | 14.02                    | 2.80    | 5.61    |
|              | 60       | 0.624        | 15.36                    | 3.07    | 6.14    |
|              | 70       | 0.728        | 16.59                    | 3.32    | 6.64    |
|              | 80       | 0.832        | 17.73                    | 3.55    | 7.09    |
|              | 90       | 0.936        | 18.81                    | 3.76    | 7.52    |
|              | 100      | 1.04         | 19.83                    | 3.97    | 7.93    |
| 140          | 50       | 0.56         | 14.55                    | 2.91    | 5.82    |
|              | 60       | 0.672        | 15.94                    | 3.19    | 6.38    |
|              | 70       | 0.784        | 17.21                    | 3.44    | 6.89    |
|              | 80       | 0.896        | 18.40                    | 3.68    | 7.36    |
|              | 90       | 1.008        | 19.52                    | 3.90    | 7.81    |
|              | 100      | 1.12         | 20.58                    | 4.12    | 8.23    |
| 150          | 50       | 0.6          | 15.06                    | 3.01    | 6.02    |
|              | 60       | 0.72         | 16.50                    | 3.30    | 6.60    |
|              | 70       | 0.84         | 17.82                    | 3.56    | 7.13    |
|              | 80       | 0.96         | 19.05                    | 3.81    | 7.62    |
|              | 90       | 1.08         | 20.20                    | 4.04    | 8.08    |
|              | 100      | 1.2          | 21.30                    | 4.26    | 8.52    |
| 160          | 50       | 0.64         | 15.55                    | 3.11    | 6.22    |
|              | 60       | 0.768        | 17.04                    | 3.41    | 6.82    |
|              | 70       | 0.896        | 18.40                    | 3.68    | 7.36    |
|              | 80       | 1.024        | 19.67                    | 3.93    | 7.87    |
|              | 90       | 1.152        | 20.87                    | 4.17    | 8.35    |
|              | 100      | 1.28         | 22.00                    | 4.40    | 8.80    |

### 3" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.04         | 4.24                     | 0.85    | 1.70    |
|              | 60       | 0.048        | 4.65                     | 0.93    | 1.86    |
|              | 70       | 0.056        | 5.02                     | 1.00    | 2.01    |
|              | 80       | 0.064        | 5.37                     | 1.07    | 2.15    |
|              | 90       | 0.072        | 5.69                     | 1.14    | 2.28    |
|              | 100      | 0.08         | 6.00                     | 1.20    | 2.40    |
| 20           | 50       | 0.08         | 6.00                     | 1.20    | 2.40    |
|              | 60       | 0.096        | 6.57                     | 1.31    | 2.63    |
|              | 70       | 0.112        | 7.10                     | 1.42    | 2.84    |
|              | 80       | 0.128        | 7.59                     | 1.52    | 3.04    |
|              | 90       | 0.144        | 8.05                     | 1.61    | 3.22    |
|              | 100      | 0.16         | 8.49                     | 1.70    | 3.39    |

Table E-1: PEX pipe expansion arm calculations ½" to 3"

### 3" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 30           | 50       | 0.12         | 7.35                     | 1.47    | 2.94    |
|              | 60       | 0.144        | 8.05                     | 1.61    | 3.22    |
|              | 70       | 0.168        | 8.69                     | 1.74    | 3.48    |
|              | 80       | 0.192        | 9.30                     | 1.86    | 3.72    |
|              | 90       | 0.216        | 9.86                     | 1.97    | 3.94    |
|              | 100      | 0.24         | 10.39                    | 2.08    | 4.16    |
| 40           | 50       | 0.16         | 8.49                     | 1.70    | 3.39    |
|              | 60       | 0.192        | 9.30                     | 1.86    | 3.72    |
|              | 70       | 0.224        | 10.04                    | 2.01    | 4.02    |
|              | 80       | 0.256        | 10.73                    | 2.15    | 4.29    |
|              | 90       | 0.288        | 11.38                    | 2.28    | 4.55    |
|              | 100      | 0.32         | 12.00                    | 2.40    | 4.80    |
| 50           | 50       | 0.2          | 9.49                     | 1.90    | 3.79    |
|              | 60       | 0.24         | 10.39                    | 2.08    | 4.16    |
|              | 70       | 0.28         | 11.22                    | 2.24    | 4.49    |
|              | 80       | 0.32         | 12.00                    | 2.40    | 4.80    |
|              | 90       | 0.36         | 12.73                    | 2.55    | 5.09    |
|              | 100      | 0.4          | 13.42                    | 2.68    | 5.37    |
| 60           | 50       | 0.24         | 10.39                    | 2.08    | 4.16    |
|              | 60       | 0.288        | 11.38                    | 2.28    | 4.55    |
|              | 70       | 0.336        | 12.30                    | 2.46    | 4.92    |
|              | 80       | 0.384        | 13.15                    | 2.63    | 5.26    |
|              | 90       | 0.432        | 13.94                    | 2.79    | 5.58    |
|              | 100      | 0.48         | 14.70                    | 2.94    | 5.88    |
| 70           | 50       | 0.28         | 11.22                    | 2.24    | 4.49    |
|              | 60       | 0.336        | 12.30                    | 2.46    | 4.92    |
|              | 70       | 0.392        | 13.28                    | 2.66    | 5.31    |
|              | 80       | 0.448        | 14.20                    | 2.84    | 5.68    |
|              | 90       | 0.504        | 15.06                    | 3.01    | 6.02    |
|              | 100      | 0.56         | 15.87                    | 3.17    | 6.35    |
| 80           | 50       | 0.32         | 12.00                    | 2.40    | 4.80    |
|              | 60       | 0.384        | 13.15                    | 2.63    | 5.26    |
|              | 70       | 0.448        | 14.20                    | 2.84    | 5.68    |
|              | 80       | 0.512        | 15.18                    | 3.04    | 6.07    |
|              | 90       | 0.576        | 16.10                    | 3.22    | 6.44    |
|              | 100      | 0.64         | 16.97                    | 3.39    | 6.79    |
| 90           | 50       | 0.36         | 12.73                    | 2.55    | 5.09    |
|              | 60       | 0.432        | 13.94                    | 2.79    | 5.58    |
|              | 70       | 0.504        | 15.06                    | 3.01    | 6.02    |
|              | 80       | 0.576        | 16.10                    | 3.22    | 6.44    |
|              | 90       | 0.648        | 17.08                    | 3.42    | 6.83    |
|              | 100      | 0.72         | 18.00                    | 3.60    | 7.20    |

### 3" PEX pipe expansion arm

PEX with PEX-a Pipe Support, strut and strut clamps has a thermal expansion rate of 0.08"/10°F ΔT/100 ft. (2.03mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 100          | 50       | 0.4          | 13.42                    | 2.68    | 5.37    |
|              | 60       | 0.48         | 14.70                    | 2.94    | 5.88    |
|              | 70       | 0.56         | 15.87                    | 3.17    | 6.35    |
|              | 80       | 0.64         | 16.97                    | 3.39    | 6.79    |
|              | 90       | 0.72         | 18.00                    | 3.60    | 7.20    |
|              | 100      | 0.8          | 18.97                    | 3.79    | 7.59    |
| 110          | 50       | 0.44         | 14.07                    | 2.81    | 5.63    |
|              | 60       | 0.528        | 15.41                    | 3.08    | 6.17    |
|              | 70       | 0.616        | 16.65                    | 3.33    | 6.66    |
|              | 80       | 0.704        | 17.80                    | 3.56    | 7.12    |
|              | 90       | 0.792        | 18.88                    | 3.78    | 7.55    |
|              | 100      | 0.88         | 19.90                    | 3.98    | 7.96    |
| 120          | 50       | 0.48         | 14.70                    | 2.94    | 5.88    |
|              | 60       | 0.576        | 16.10                    | 3.22    | 6.44    |
|              | 70       | 0.672        | 17.39                    | 3.48    | 6.96    |
|              | 80       | 0.768        | 18.59                    | 3.72    | 7.44    |
|              | 90       | 0.864        | 19.72                    | 3.94    | 7.89    |
|              | 100      | 0.96         | 20.78                    | 4.16    | 8.31    |
| 130          | 50       | 0.52         | 15.30                    | 3.06    | 6.12    |
|              | 60       | 0.624        | 16.76                    | 3.35    | 6.70    |
|              | 70       | 0.728        | 18.10                    | 3.62    | 7.24    |
|              | 80       | 0.832        | 19.35                    | 3.87    | 7.74    |
|              | 90       | 0.936        | 20.52                    | 4.10    | 8.21    |
|              | 100      | 1.04         | 21.63                    | 4.33    | 8.65    |
| 140          | 50       | 0.56         | 15.87                    | 3.17    | 6.35    |
|              | 60       | 0.672        | 17.39                    | 3.48    | 6.96    |
|              | 70       | 0.784        | 18.78                    | 3.76    | 7.51    |
|              | 80       | 0.896        | 20.08                    | 4.02    | 8.03    |
|              | 90       | 1.008        | 21.30                    | 4.26    | 8.52    |
|              | 100      | 1.12         | 22.45                    | 4.49    | 8.98    |
| 150          | 50       | 0.6          | 16.43                    | 3.29    | 6.57    |
|              | 60       | 0.72         | 18.00                    | 3.60    | 7.20    |
|              | 70       | 0.84         | 19.44                    | 3.89    | 7.78    |
|              | 80       | 0.96         | 20.78                    | 4.16    | 8.31    |
|              | 90       | 1.08         | 22.05                    | 4.41    | 8.82    |
|              | 100      | 1.2          | 23.24                    | 4.65    | 9.30    |
| 160          | 50       | 0.64         | 16.97                    | 3.39    | 6.79    |
|              | 60       | 0.768        | 18.59                    | 3.72    | 7.44    |
|              | 70       | 0.896        | 20.08                    | 4.02    | 8.03    |
|              | 80       | 1.024        | 21.47                    | 4.29    | 8.59    |
|              | 90       | 1.152        | 22.77                    | 4.55    | 9.11    |
|              | 100      | 1.28         | 24.00                    | 4.80    | 9.60    |

Table E-1: PEX Pipe expansion arm calculations ½" to 3"

## PEX with PEX-a Pipe Support and clevis hangers or loops

has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m)

### ½" PEX pipe expansion arm

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.06         | 2.32                     | 0.46    | 0.93    |
|              | 60       | 0.072        | 2.55                     | 0.51    | 1.02    |
|              | 70       | 0.084        | 2.75                     | 0.55    | 1.10    |
|              | 80       | 0.096        | 2.94                     | 0.59    | 1.18    |
|              | 90       | 0.108        | 3.12                     | 0.62    | 1.25    |
|              | 100      | 0.12         | 3.29                     | 0.66    | 1.31    |
| 20           | 50       | 0.12         | 3.29                     | 0.66    | 1.31    |
|              | 60       | 0.144        | 3.60                     | 0.72    | 1.44    |
|              | 70       | 0.168        | 3.89                     | 0.78    | 1.56    |
|              | 80       | 0.192        | 4.16                     | 0.83    | 1.66    |
|              | 90       | 0.216        | 4.41                     | 0.88    | 1.76    |
|              | 100      | 0.24         | 4.65                     | 0.93    | 1.86    |
| 30           | 50       | 0.18         | 4.02                     | 0.80    | 1.61    |
|              | 60       | 0.216        | 4.41                     | 0.88    | 1.76    |
|              | 70       | 0.252        | 4.76                     | 0.95    | 1.90    |
|              | 80       | 0.288        | 5.09                     | 1.02    | 2.04    |
|              | 90       | 0.324        | 5.40                     | 1.08    | 2.16    |
|              | 100      | 0.36         | 5.69                     | 1.14    | 2.28    |
| 40           | 50       | 0.24         | 4.65                     | 0.93    | 1.86    |
|              | 60       | 0.288        | 5.09                     | 1.02    | 2.04    |
|              | 70       | 0.336        | 5.50                     | 1.10    | 2.20    |
|              | 80       | 0.384        | 5.88                     | 1.18    | 2.35    |
|              | 90       | 0.432        | 6.24                     | 1.25    | 2.49    |
|              | 100      | 0.48         | 6.57                     | 1.31    | 2.63    |
| 50           | 50       | 0.3          | 5.20                     | 1.04    | 2.08    |
|              | 60       | 0.36         | 5.69                     | 1.14    | 2.28    |
|              | 70       | 0.42         | 6.15                     | 1.23    | 2.46    |
|              | 80       | 0.48         | 6.57                     | 1.31    | 2.63    |
|              | 90       | 0.54         | 6.97                     | 1.39    | 2.79    |
|              | 100      | 0.6          | 7.35                     | 1.47    | 2.94    |
| 60           | 50       | 0.36         | 5.69                     | 1.14    | 2.28    |
|              | 60       | 0.432        | 6.24                     | 1.25    | 2.49    |
|              | 70       | 0.504        | 6.73                     | 1.35    | 2.69    |
|              | 80       | 0.576        | 7.20                     | 1.44    | 2.88    |
|              | 90       | 0.648        | 7.64                     | 1.53    | 3.05    |
|              | 100      | 0.72         | 8.05                     | 1.61    | 3.22    |

### ½" PEX pipe expansion arm

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 70           | 50       | 0.42         | 6.15                     | 1.23    | 2.46    |
|              | 60       | 0.504        | 6.73                     | 1.35    | 2.69    |
|              | 70       | 0.588        | 7.27                     | 1.45    | 2.91    |
|              | 80       | 0.672        | 7.78                     | 1.56    | 3.11    |
|              | 90       | 0.756        | 8.25                     | 1.65    | 3.30    |
|              | 100      | 0.84         | 8.69                     | 1.74    | 3.48    |
| 80           | 50       | 0.48         | 6.57                     | 1.31    | 2.63    |
|              | 60       | 0.576        | 7.20                     | 1.44    | 2.88    |
|              | 70       | 0.672        | 7.78                     | 1.56    | 3.11    |
|              | 80       | 0.768        | 8.31                     | 1.66    | 3.33    |
|              | 90       | 0.864        | 8.82                     | 1.76    | 3.53    |
|              | 100      | 0.96         | 9.30                     | 1.86    | 3.72    |
| 90           | 50       | 0.54         | 6.97                     | 1.39    | 2.79    |
|              | 60       | 0.648        | 7.64                     | 1.53    | 3.05    |
|              | 70       | 0.756        | 8.25                     | 1.65    | 3.30    |
|              | 80       | 0.864        | 8.82                     | 1.76    | 3.53    |
|              | 90       | 0.972        | 9.35                     | 1.87    | 3.74    |
|              | 100      | 1.08         | 9.86                     | 1.97    | 3.94    |
| 100          | 50       | 0.6          | 7.35                     | 1.47    | 2.94    |
|              | 60       | 0.72         | 8.05                     | 1.61    | 3.22    |
|              | 70       | 0.84         | 8.69                     | 1.74    | 3.48    |
|              | 80       | 0.96         | 9.30                     | 1.86    | 3.72    |
|              | 90       | 1.08         | 9.86                     | 1.97    | 3.94    |
|              | 100      | 1.2          | 10.39                    | 2.08    | 4.16    |
| 110          | 50       | 0.66         | 7.71                     | 1.54    | 3.08    |
|              | 60       | 0.792        | 8.44                     | 1.69    | 3.38    |
|              | 70       | 0.924        | 9.12                     | 1.82    | 3.65    |
|              | 80       | 1.056        | 9.75                     | 1.95    | 3.90    |
|              | 90       | 1.188        | 10.34                    | 2.07    | 4.14    |
|              | 100      | 1.32         | 10.90                    | 2.18    | 4.36    |
| 120          | 50       | 0.72         | 8.05                     | 1.61    | 3.22    |
|              | 60       | 0.864        | 8.82                     | 1.76    | 3.53    |
|              | 70       | 1.008        | 9.52                     | 1.90    | 3.81    |
|              | 80       | 1.152        | 10.18                    | 2.04    | 4.07    |
|              | 90       | 1.296        | 10.80                    | 2.16    | 4.32    |
|              | 100      | 1.44         | 11.38                    | 2.28    | 4.55    |

Table E-2: PEX pipe expansion arm calculations ½" to 3"

### ½" PEX pipe expansion arm

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 130          | 50       | 0.78         | 8.38                     | 1.68    | 3.35    |
|              | 60       | 0.936        | 9.18                     | 1.84    | 3.67    |
|              | 70       | 1.092        | 9.91                     | 1.98    | 3.97    |
|              | 80       | 1.248        | 10.60                    | 2.12    | 4.24    |
|              | 90       | 1.404        | 11.24                    | 2.25    | 4.50    |
|              | 100      | 1.56         | 11.85                    | 2.37    | 4.74    |
| 140          | 50       | 0.84         | 8.69                     | 1.74    | 3.48    |
|              | 60       | 1.008        | 9.52                     | 1.90    | 3.81    |
|              | 70       | 1.176        | 10.29                    | 2.06    | 4.12    |
|              | 80       | 1.344        | 11.00                    | 2.20    | 4.40    |
|              | 90       | 1.512        | 11.67                    | 2.33    | 4.67    |
|              | 100      | 1.68         | 12.30                    | 2.46    | 4.92    |
| 150          | 50       | 0.9          | 9.00                     | 1.80    | 3.60    |
|              | 60       | 1.08         | 9.86                     | 1.97    | 3.94    |
|              | 70       | 1.26         | 10.65                    | 2.13    | 4.26    |
|              | 80       | 1.44         | 11.38                    | 2.28    | 4.55    |
|              | 90       | 1.62         | 12.07                    | 2.41    | 4.83    |
|              | 100      | 1.8          | 12.73                    | 2.55    | 5.09    |
| 160          | 50       | 0.96         | 9.30                     | 1.86    | 3.72    |
|              | 60       | 1.152        | 10.18                    | 2.04    | 4.07    |
|              | 70       | 1.344        | 11.00                    | 2.20    | 4.40    |
|              | 80       | 1.536        | 11.76                    | 2.35    | 4.70    |
|              | 90       | 1.728        | 12.47                    | 2.49    | 4.99    |
|              | 100      | 1.92         | 13.15                    | 2.63    | 5.26    |

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

### ¾" PEX pipe expansion arm

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible Arm Length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 30           | 50       | 0.18         | 4.76                     | 0.95    | 1.90    |
|              | 60       | 0.216        | 5.22                     | 1.04    | 2.09    |
|              | 70       | 0.252        | 5.63                     | 1.13    | 2.25    |
|              | 80       | 0.288        | 6.02                     | 1.20    | 2.41    |
|              | 90       | 0.324        | 6.39                     | 1.28    | 2.56    |
|              | 100      | 0.36         | 6.73                     | 1.35    | 2.69    |
| 40           | 50       | 0.24         | 5.50                     | 1.10    | 2.20    |
|              | 60       | 0.288        | 6.02                     | 1.20    | 2.41    |
|              | 70       | 0.336        | 6.51                     | 1.30    | 2.60    |
|              | 80       | 0.384        | 6.96                     | 1.39    | 2.78    |
|              | 90       | 0.432        | 7.38                     | 1.48    | 2.95    |
|              | 100      | 0.48         | 7.78                     | 1.56    | 3.11    |
| 50           | 50       | 0.3          | 6.15                     | 1.23    | 2.46    |
|              | 60       | 0.36         | 6.73                     | 1.35    | 2.69    |
|              | 70       | 0.42         | 7.27                     | 1.45    | 2.91    |
|              | 80       | 0.48         | 7.78                     | 1.56    | 3.11    |
|              | 90       | 0.54         | 8.25                     | 1.65    | 3.30    |
|              | 100      | 0.6          | 8.69                     | 1.74    | 3.48    |
| 60           | 50       | 0.36         | 6.73                     | 1.35    | 2.69    |
|              | 60       | 0.432        | 7.38                     | 1.48    | 2.95    |
|              | 70       | 0.504        | 7.97                     | 1.59    | 3.19    |
|              | 80       | 0.576        | 8.52                     | 1.70    | 3.41    |
|              | 90       | 0.648        | 9.04                     | 1.81    | 3.61    |
|              | 100      | 0.72         | 9.52                     | 1.90    | 3.81    |
| 70           | 50       | 0.42         | 7.27                     | 1.45    | 2.91    |
|              | 60       | 0.504        | 7.97                     | 1.59    | 3.19    |
|              | 70       | 0.588        | 8.61                     | 1.72    | 3.44    |
|              | 80       | 0.672        | 9.20                     | 1.84    | 3.68    |
|              | 90       | 0.756        | 9.76                     | 1.95    | 3.90    |
|              | 100      | 0.84         | 10.29                    | 2.06    | 4.12    |
| 80           | 50       | 0.48         | 7.78                     | 1.56    | 3.11    |
|              | 60       | 0.576        | 8.52                     | 1.70    | 3.41    |
|              | 70       | 0.672        | 9.20                     | 1.84    | 3.68    |
|              | 80       | 0.768        | 9.84                     | 1.97    | 3.93    |
|              | 90       | 0.864        | 10.43                    | 2.09    | 4.17    |
|              | 100      | 0.96         | 11.00                    | 2.20    | 4.40    |
| 90           | 50       | 0.54         | 8.25                     | 1.65    | 3.30    |
|              | 60       | 0.648        | 9.04                     | 1.81    | 3.61    |
|              | 70       | 0.756        | 9.76                     | 1.95    | 3.90    |
|              | 80       | 0.864        | 10.43                    | 2.09    | 4.17    |
|              | 90       | 0.972        | 11.07                    | 2.21    | 4.43    |
|              | 100      | 1.08         | 11.67                    | 2.33    | 4.67    |

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

### ¾" PEX pipe expansion arm

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible Arm Length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.06         | 2.75                     | 0.55    | 1.10    |
|              | 60       | 0.072        | 3.01                     | 0.60    | 1.20    |
|              | 70       | 0.084        | 3.25                     | 0.65    | 1.30    |
|              | 80       | 0.096        | 3.48                     | 0.70    | 1.39    |
|              | 90       | 0.108        | 3.69                     | 0.74    | 1.48    |
|              | 100      | 0.12         | 3.89                     | 0.78    | 1.56    |
| 20           | 50       | 0.12         | 3.89                     | 0.78    | 1.56    |
|              | 60       | 0.144        | 4.26                     | 0.85    | 1.70    |
|              | 70       | 0.168        | 4.60                     | 0.92    | 1.84    |
|              | 80       | 0.192        | 4.92                     | 0.98    | 1.97    |
|              | 90       | 0.216        | 5.22                     | 1.04    | 2.09    |
|              | 100      | 0.24         | 5.50                     | 1.10    | 2.20    |

PEX with PEX-a Pipe Support and clevis hangers or loops

Table E-2: PEX pipe expansion arm calculations ½" to 3"

**¾" PEX pipe expansion arm**

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible Arm Length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 100          | 50       | 0.6          | 8.69                     | 1.74    | 3.48    |
|              | 60       | 0.72         | 9.52                     | 1.90    | 3.81    |
|              | 70       | 0.84         | 10.29                    | 2.06    | 4.12    |
|              | 80       | 0.96         | 11.00                    | 2.20    | 4.40    |
|              | 90       | 1.08         | 11.67                    | 2.33    | 4.67    |
| 100          | 1.2      | 12.30        | 2.46                     | 4.92    |         |
| 110          | 50       | 0.66         | 9.12                     | 1.82    | 3.65    |
|              | 60       | 0.792        | 9.99                     | 2.00    | 4.00    |
|              | 70       | 0.924        | 10.79                    | 2.16    | 4.32    |
|              | 80       | 1.056        | 11.53                    | 2.31    | 4.61    |
|              | 90       | 1.188        | 12.23                    | 2.45    | 4.89    |
| 100          | 1.32     | 12.90        | 2.58                     | 5.16    |         |
| 120          | 50       | 0.72         | 9.52                     | 1.90    | 3.81    |
|              | 60       | 0.864        | 10.43                    | 2.09    | 4.17    |
|              | 70       | 1.008        | 11.27                    | 2.25    | 4.51    |
|              | 80       | 1.152        | 12.05                    | 2.41    | 4.82    |
|              | 90       | 1.296        | 12.78                    | 2.56    | 5.11    |
| 100          | 1.44     | 13.47        | 2.69                     | 5.39    |         |
| 130          | 50       | 0.78         | 9.91                     | 1.98    | 3.97    |
|              | 60       | 0.936        | 10.86                    | 2.17    | 4.34    |
|              | 70       | 1.092        | 11.73                    | 2.35    | 4.69    |
|              | 80       | 1.248        | 12.54                    | 2.51    | 5.02    |
|              | 90       | 1.404        | 13.30                    | 2.66    | 5.32    |
| 100          | 1.56     | 14.02        | 2.80                     | 5.61    |         |
| 140          | 50       | 0.84         | 10.29                    | 2.06    | 4.12    |
|              | 60       | 1.008        | 11.27                    | 2.25    | 4.51    |
|              | 70       | 1.176        | 12.17                    | 2.43    | 4.87    |
|              | 80       | 1.344        | 13.01                    | 2.60    | 5.21    |
|              | 90       | 1.512        | 13.80                    | 2.76    | 5.52    |
| 100          | 1.68     | 14.55        | 2.91                     | 5.82    |         |
| 150          | 50       | 0.9          | 10.65                    | 2.13    | 4.26    |
|              | 60       | 1.08         | 11.67                    | 2.33    | 4.67    |
|              | 70       | 1.26         | 12.60                    | 2.52    | 5.04    |
|              | 80       | 1.44         | 13.47                    | 2.69    | 5.39    |
|              | 90       | 1.62         | 14.29                    | 2.86    | 5.71    |
| 100          | 1.8      | 15.06        | 3.01                     | 6.02    |         |
| 160          | 50       | 0.96         | 11.00                    | 2.20    | 4.40    |
|              | 60       | 1.152        | 12.05                    | 2.41    | 4.82    |
|              | 70       | 1.344        | 13.01                    | 2.60    | 5.21    |
|              | 80       | 1.536        | 13.91                    | 2.78    | 5.56    |
|              | 90       | 1.728        | 14.76                    | 2.95    | 5.90    |
| 100          | 1.92     | 15.55        | 3.11                     | 6.22    |         |

**1" PEX pipe expansion arm**

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.06         | 3.12                     | 0.62    | 1.25    |
|              | 60       | 0.072        | 3.42                     | 0.68    | 1.37    |
|              | 70       | 0.084        | 3.69                     | 0.74    | 1.48    |
|              | 80       | 0.096        | 3.94                     | 0.79    | 1.58    |
|              | 90       | 0.108        | 4.18                     | 0.84    | 1.67    |
| 100          | 0.12     | 4.41         | 0.88                     | 1.76    |         |
| 20           | 50       | 0.12         | 4.41                     | 0.88    | 1.76    |
|              | 60       | 0.144        | 4.83                     | 0.97    | 1.93    |
|              | 70       | 0.168        | 5.22                     | 1.04    | 2.09    |
|              | 80       | 0.192        | 5.58                     | 1.12    | 2.23    |
|              | 90       | 0.216        | 5.92                     | 1.18    | 2.37    |
| 100          | 0.24     | 6.24         | 1.25                     | 2.49    |         |
| 30           | 50       | 0.18         | 5.40                     | 1.08    | 2.16    |
|              | 60       | 0.216        | 5.92                     | 1.18    | 2.37    |
|              | 70       | 0.252        | 6.39                     | 1.28    | 2.56    |
|              | 80       | 0.288        | 6.83                     | 1.37    | 2.73    |
|              | 90       | 0.324        | 7.24                     | 1.45    | 2.90    |
| 100          | 0.36     | 7.64         | 1.53                     | 3.05    |         |
| 40           | 50       | 0.24         | 6.24                     | 1.25    | 2.49    |
|              | 60       | 0.072        | 3.42                     | 0.68    | 1.37    |
|              | 70       | 0.084        | 3.69                     | 0.74    | 1.48    |
|              | 80       | 0.096        | 3.94                     | 0.79    | 1.58    |
|              | 90       | 0.108        | 4.18                     | 0.84    | 1.67    |
| 100          | 0.12     | 4.41         | 0.88                     | 1.76    |         |
| 50           | 50       | 0.3          | 6.97                     | 1.39    | 2.79    |
|              | 60       | 0.36         | 7.64                     | 1.53    | 3.05    |
|              | 70       | 0.42         | 8.25                     | 1.65    | 3.30    |
|              | 80       | 0.48         | 8.82                     | 1.76    | 3.53    |
|              | 90       | 0.54         | 9.35                     | 1.87    | 3.74    |
| 100          | 0.6      | 9.86         | 1.97                     | 3.94    |         |
| 60           | 50       | 0.36         | 7.64                     | 1.53    | 3.05    |
|              | 60       | 0.432        | 8.37                     | 1.67    | 3.35    |
|              | 70       | 0.504        | 9.04                     | 1.81    | 3.61    |
|              | 80       | 0.576        | 9.66                     | 1.93    | 3.86    |
|              | 90       | 0.648        | 10.25                    | 2.05    | 4.10    |
| 100          | 0.72     | 10.80        | 2.16                     | 4.32    |         |
| 70           | 50       | 0.42         | 8.25                     | 1.65    | 3.30    |
|              | 60       | 0.504        | 9.04                     | 1.81    | 3.61    |
|              | 70       | 0.588        | 9.76                     | 1.95    | 3.90    |
|              | 80       | 0.672        | 10.43                    | 2.09    | 4.17    |
|              | 90       | 0.756        | 11.07                    | 2.21    | 4.43    |
| 100          | 0.84     | 11.67        | 2.33                     | 4.67    |         |

**Table E-2: PEX pipe expansion arm calculations ½" to 3"**

### 1" PEX pipe expansion arm

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 80           | 50       | 0.48         | 8.82                     | 1.76    | 3.53    |
|              | 60       | 0.576        | 9.66                     | 1.93    | 3.86    |
|              | 70       | 0.672        | 10.43                    | 2.09    | 4.17    |
|              | 80       | 0.768        | 11.15                    | 2.23    | 4.46    |
|              | 90       | 0.864        | 11.83                    | 2.37    | 4.73    |
|              | 100      | 0.96         | 12.47                    | 2.49    | 4.99    |
| 90           | 50       | 0.06         | 3.12                     | 0.62    | 1.25    |
|              | 60       | 0.072        | 3.42                     | 0.68    | 1.37    |
|              | 70       | 0.084        | 3.69                     | 0.74    | 1.48    |
|              | 80       | 0.096        | 3.94                     | 0.79    | 1.58    |
|              | 90       | 0.108        | 4.18                     | 0.84    | 1.67    |
|              | 100      | 0.12         | 4.41                     | 0.88    | 1.76    |
| 100          | 50       | 0.12         | 4.41                     | 0.88    | 1.76    |
|              | 60       | 0.144        | 4.83                     | 0.97    | 1.93    |
|              | 70       | 0.168        | 5.22                     | 1.04    | 2.09    |
|              | 80       | 0.192        | 5.58                     | 1.12    | 2.23    |
|              | 90       | 0.216        | 5.92                     | 1.18    | 2.37    |
|              | 100      | 0.24         | 6.24                     | 1.25    | 2.49    |
| 110          | 50       | 0.66         | 10.34                    | 2.07    | 4.14    |
|              | 60       | 0.792        | 11.33                    | 2.27    | 4.53    |
|              | 70       | 0.924        | 12.23                    | 2.45    | 4.89    |
|              | 80       | 1.056        | 13.08                    | 2.62    | 5.23    |
|              | 90       | 1.188        | 13.87                    | 2.77    | 5.55    |
|              | 100      | 1.32         | 14.62                    | 2.92    | 5.85    |
| 120          | 50       | 0.72         | 10.80                    | 2.16    | 4.32    |
|              | 60       | 0.864        | 11.83                    | 2.37    | 4.73    |
|              | 70       | 1.008        | 12.78                    | 2.56    | 5.11    |
|              | 80       | 1.152        | 13.66                    | 2.73    | 5.46    |
|              | 90       | 1.296        | 14.49                    | 2.90    | 5.80    |
|              | 100      | 1.44         | 15.27                    | 3.05    | 6.11    |
| 130          | 50       | 0.78         | 11.24                    | 2.25    | 4.50    |
|              | 60       | 0.936        | 12.31                    | 2.46    | 4.93    |
|              | 70       | 1.092        | 13.30                    | 2.66    | 5.32    |
|              | 80       | 1.248        | 14.22                    | 2.84    | 5.69    |
|              | 90       | 1.404        | 15.08                    | 3.02    | 6.03    |
|              | 100      | 1.56         | 15.90                    | 3.18    | 6.36    |
| 140          | 50       | 0.84         | 11.67                    | 2.33    | 4.67    |
|              | 60       | 1.008        | 12.78                    | 2.56    | 5.11    |
|              | 70       | 1.176        | 13.80                    | 2.76    | 5.52    |
|              | 80       | 1.344        | 14.76                    | 2.95    | 5.90    |
|              | 90       | 1.512        | 15.65                    | 3.13    | 6.26    |
|              | 100      | 1.68         | 16.50                    | 3.30    | 6.60    |

### 1" PEX pipe expansion arm

PEX with PEX-a Pipe Support and Clevis Hangers or Loops

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 150          | 50       | 0.9          | 12.07                    | 2.41    | 4.83    |
|              | 60       | 1.08         | 13.23                    | 2.65    | 5.29    |
|              | 70       | 1.26         | 14.29                    | 2.86    | 5.71    |
|              | 80       | 1.44         | 15.27                    | 3.05    | 6.11    |
|              | 90       | 1.62         | 16.20                    | 3.24    | 6.48    |
|              | 100      | 1.8          | 17.08                    | 3.42    | 6.83    |
| 160          | 50       | 0.96         | 12.47                    | 2.49    | 4.99    |
|              | 60       | 1.152        | 13.66                    | 2.73    | 5.46    |
|              | 70       | 1.344        | 14.76                    | 2.95    | 5.90    |
|              | 80       | 1.536        | 15.77                    | 3.15    | 6.31    |
|              | 90       | 1.728        | 16.73                    | 3.35    | 6.69    |
|              | 100      | 1.92         | 17.64                    | 3.53    | 7.05    |

### 1¼" PEX pipe expansion arm

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.06         | 3.45                     | 0.69    | 1.38    |
|              | 60       | 0.072        | 3.78                     | 0.76    | 1.51    |
|              | 70       | 0.084        | 4.08                     | 0.82    | 1.63    |
|              | 80       | 0.096        | 4.36                     | 0.87    | 1.74    |
|              | 90       | 0.108        | 4.62                     | 0.92    | 1.85    |
|              | 100      | 0.12         | 4.87                     | 0.97    | 1.95    |
| 20           | 50       | 0.12         | 4.87                     | 0.97    | 1.95    |
|              | 60       | 0.144        | 5.34                     | 1.07    | 2.14    |
|              | 70       | 0.168        | 5.77                     | 1.15    | 2.31    |
|              | 80       | 0.192        | 6.17                     | 1.23    | 2.47    |
|              | 90       | 0.216        | 6.54                     | 1.31    | 2.62    |
|              | 100      | 0.24         | 6.89                     | 1.38    | 2.76    |
| 30           | 50       | 0.18         | 5.97                     | 1.19    | 2.39    |
|              | 60       | 0.216        | 6.54                     | 1.31    | 2.62    |
|              | 70       | 0.252        | 7.06                     | 1.41    | 2.83    |
|              | 80       | 0.288        | 7.55                     | 1.51    | 3.02    |
|              | 90       | 0.324        | 8.01                     | 1.60    | 3.20    |
|              | 100      | 0.36         | 8.44                     | 1.69    | 3.38    |
| 40           | 50       | 0.24         | 6.89                     | 1.38    | 2.76    |
|              | 60       | 0.288        | 7.55                     | 1.51    | 3.02    |
|              | 70       | 0.336        | 8.16                     | 1.63    | 3.26    |
|              | 80       | 0.384        | 8.72                     | 1.74    | 3.49    |
|              | 90       | 0.432        | 9.25                     | 1.85    | 3.70    |
|              | 100      | 0.48         | 9.75                     | 1.95    | 3.90    |

Table E-2: PEX Pipe expansion arm calculations ½" to 3"

### 1¼" PEX pipe expansion arm

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 50           | 50       | 0.3          | 7.71                     | 1.54    | 3.08    |
|              | 60       | 0.36         | 8.44                     | 1.69    | 3.38    |
|              | 70       | 0.42         | 9.12                     | 1.82    | 3.65    |
|              | 80       | 0.48         | 9.75                     | 1.95    | 3.90    |
|              | 90       | 0.54         | 10.34                    | 2.07    | 4.14    |
|              | 100      | 0.6          | 10.90                    | 2.18    | 4.36    |
| 60           | 50       | 0.36         | 8.44                     | 1.69    | 3.38    |
|              | 60       | 0.432        | 9.25                     | 1.85    | 3.70    |
|              | 70       | 0.504        | 9.99                     | 2.00    | 4.00    |
|              | 80       | 0.576        | 10.68                    | 2.14    | 4.27    |
|              | 90       | 0.648        | 11.33                    | 2.27    | 4.53    |
|              | 100      | 0.72         | 11.94                    | 2.39    | 4.78    |
| 70           | 50       | 0.42         | 9.12                     | 1.82    | 3.65    |
|              | 60       | 0.504        | 9.99                     | 2.00    | 4.00    |
|              | 70       | 0.588        | 10.79                    | 2.16    | 4.32    |
|              | 80       | 0.672        | 11.53                    | 2.31    | 4.61    |
|              | 90       | 0.756        | 12.23                    | 2.45    | 4.89    |
|              | 100      | 0.84         | 12.90                    | 2.58    | 5.16    |
| 80           | 50       | 0.48         | 9.75                     | 1.95    | 3.90    |
|              | 60       | 0.576        | 10.68                    | 2.14    | 4.27    |
|              | 70       | 0.672        | 11.53                    | 2.31    | 4.61    |
|              | 80       | 0.768        | 12.33                    | 2.47    | 4.93    |
|              | 90       | 0.864        | 13.08                    | 2.62    | 5.23    |
|              | 100      | 0.96         | 13.79                    | 2.76    | 5.51    |
| 90           | 50       | 0.54         | 10.34                    | 2.07    | 4.14    |
|              | 60       | 0.648        | 11.33                    | 2.27    | 4.53    |
|              | 70       | 0.756        | 12.23                    | 2.45    | 4.89    |
|              | 80       | 0.864        | 13.08                    | 2.62    | 5.23    |
|              | 90       | 0.972        | 13.87                    | 2.77    | 5.55    |
|              | 100      | 1.08         | 14.62                    | 2.92    | 5.85    |
| 100          | 50       | 0.6          | 10.90                    | 2.18    | 4.36    |
|              | 60       | 0.72         | 11.94                    | 2.39    | 4.78    |
|              | 70       | 0.84         | 12.90                    | 2.58    | 5.16    |
|              | 80       | 0.96         | 13.79                    | 2.76    | 5.51    |
|              | 90       | 1.08         | 14.62                    | 2.92    | 5.85    |
|              | 100      | 1.2          | 15.41                    | 3.08    | 6.17    |
| 110          | 50       | 0.66         | 11.43                    | 2.29    | 4.57    |
|              | 60       | 0.792        | 12.52                    | 2.50    | 5.01    |
|              | 70       | 0.924        | 13.53                    | 2.71    | 5.41    |
|              | 80       | 1.056        | 14.46                    | 2.89    | 5.78    |
|              | 90       | 1.188        | 15.34                    | 3.07    | 6.13    |
|              | 100      | 1.32         | 16.17                    | 3.23    | 6.47    |

### 1¼" PEX pipe expansion arm

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 120          | 50       | 0.72         | 11.94                    | 2.39    | 4.78    |
|              | 60       | 0.864        | 13.08                    | 2.62    | 5.23    |
|              | 70       | 1.008        | 14.13                    | 2.83    | 5.65    |
|              | 80       | 1.152        | 15.10                    | 3.02    | 6.04    |
|              | 90       | 1.296        | 16.02                    | 3.20    | 6.41    |
|              | 100      | 1.44         | 16.89                    | 3.38    | 6.75    |
| 130          | 50       | 0.78         | 12.43                    | 2.49    | 4.97    |
|              | 60       | 0.936        | 13.61                    | 2.72    | 5.45    |
|              | 70       | 1.092        | 14.70                    | 2.94    | 5.88    |
|              | 80       | 1.248        | 15.72                    | 3.14    | 6.29    |
|              | 90       | 1.404        | 16.67                    | 3.33    | 6.67    |
|              | 100      | 1.56         | 17.57                    | 3.51    | 7.03    |
| 140          | 50       | 0.84         | 12.90                    | 2.58    | 5.16    |
|              | 60       | 1.008        | 14.13                    | 2.83    | 5.65    |
|              | 70       | 1.176        | 15.26                    | 3.05    | 6.10    |
|              | 80       | 1.344        | 16.31                    | 3.26    | 6.53    |
|              | 90       | 1.512        | 17.30                    | 3.46    | 6.92    |
|              | 100      | 1.68         | 18.24                    | 3.65    | 7.30    |
| 150          | 50       | 0.9          | 13.35                    | 2.67    | 5.34    |
|              | 60       | 1.08         | 14.62                    | 2.92    | 5.85    |
|              | 70       | 1.26         | 15.79                    | 3.16    | 6.32    |
|              | 80       | 1.44         | 16.89                    | 3.38    | 6.75    |
|              | 90       | 1.62         | 17.91                    | 3.58    | 7.16    |
|              | 100      | 1.8          | 18.88                    | 3.78    | 7.55    |
| 160          | 50       | 0.96         | 13.79                    | 2.76    | 5.51    |
|              | 60       | 1.152        | 15.10                    | 3.02    | 6.04    |
|              | 70       | 1.344        | 16.31                    | 3.26    | 6.53    |
|              | 80       | 1.536        | 17.44                    | 3.49    | 6.98    |
|              | 90       | 1.728        | 18.50                    | 3.70    | 7.40    |
|              | 100      | 1.92         | 19.50                    | 3.90    | 7.80    |

### 1½" PEX pipe expansion arm

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.06         | 3.75                     | 0.75    | 1.50    |
|              | 60       | 0.072        | 4.10                     | 0.82    | 1.64    |
|              | 70       | 0.084        | 4.43                     | 0.89    | 1.77    |
|              | 80       | 0.096        | 4.74                     | 0.95    | 1.90    |
|              | 90       | 0.108        | 5.03                     | 1.01    | 2.01    |
|              | 100      | 0.12         | 5.30                     | 1.06    | 2.12    |

Table E-2: PEX pipe expansion arm calculations ½" to 3"

### 1½" PEX pipe expansion arm

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 20           | 50       | 0.12         | 5.30                     | 1.06    | 2.12    |
|              | 60       | 0.144        | 5.80                     | 1.16    | 2.32    |
|              | 70       | 0.168        | 6.27                     | 1.25    | 2.51    |
|              | 80       | 0.192        | 6.70                     | 1.34    | 2.68    |
|              | 90       | 0.216        | 7.11                     | 1.42    | 2.84    |
|              | 100      | 0.24         | 7.49                     | 1.50    | 3.00    |
| 30           | 50       | 0.18         | 6.49                     | 1.30    | 2.60    |
|              | 60       | 0.216        | 7.11                     | 1.42    | 2.84    |
|              | 70       | 0.252        | 7.68                     | 1.54    | 3.07    |
|              | 80       | 0.288        | 8.21                     | 1.64    | 3.28    |
|              | 90       | 0.324        | 8.71                     | 1.74    | 3.48    |
|              | 100      | 0.36         | 9.18                     | 1.84    | 3.67    |
| 40           | 50       | 0.24         | 7.49                     | 1.50    | 3.00    |
|              | 60       | 0.288        | 8.21                     | 1.64    | 3.28    |
|              | 70       | 0.336        | 8.87                     | 1.77    | 3.55    |
|              | 80       | 0.384        | 9.48                     | 1.90    | 3.79    |
|              | 90       | 0.432        | 10.05                    | 2.01    | 4.02    |
|              | 100      | 0.48         | 10.60                    | 2.12    | 4.24    |
| 50           | 50       | 0.3          | 8.38                     | 1.68    | 3.35    |
|              | 60       | 0.36         | 9.18                     | 1.84    | 3.67    |
|              | 70       | 0.42         | 9.91                     | 1.98    | 3.97    |
|              | 80       | 0.48         | 10.60                    | 2.12    | 4.24    |
|              | 90       | 0.54         | 11.24                    | 2.25    | 4.50    |
|              | 100      | 0.6          | 11.85                    | 2.37    | 4.74    |
| 60           | 50       | 0.36         | 9.18                     | 1.84    | 3.67    |
|              | 60       | 0.432        | 10.05                    | 2.01    | 4.02    |
|              | 70       | 0.504        | 10.86                    | 2.17    | 4.34    |
|              | 80       | 0.576        | 11.61                    | 2.32    | 4.64    |
|              | 90       | 0.648        | 12.31                    | 2.46    | 4.93    |
|              | 100      | 0.72         | 12.98                    | 2.60    | 5.19    |
| 70           | 50       | 0.42         | 9.91                     | 1.98    | 3.97    |
|              | 60       | 0.504        | 10.86                    | 2.17    | 4.34    |
|              | 70       | 0.588        | 11.73                    | 2.35    | 4.69    |
|              | 80       | 0.672        | 12.54                    | 2.51    | 5.02    |
|              | 90       | 0.756        | 13.30                    | 2.66    | 5.32    |
|              | 100      | 0.84         | 14.02                    | 2.80    | 5.61    |
| 80           | 50       | 0.48         | 10.60                    | 2.12    | 4.24    |
|              | 60       | 0.576        | 11.61                    | 2.32    | 4.64    |
|              | 70       | 0.672        | 12.54                    | 2.51    | 5.02    |
|              | 80       | 0.768        | 13.41                    | 2.68    | 5.36    |
|              | 90       | 0.864        | 14.22                    | 2.84    | 5.69    |
|              | 100      | 0.96         | 14.99                    | 3.00    | 6.00    |

### 1½" PEX pipe expansion arm

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 90           | 50       | 0.54         | 11.24                    | 2.25    | 4.50    |
|              | 60       | 0.648        | 12.31                    | 2.46    | 4.93    |
|              | 70       | 0.756        | 13.30                    | 2.66    | 5.32    |
|              | 80       | 0.864        | 14.22                    | 2.84    | 5.69    |
|              | 90       | 0.972        | 15.08                    | 3.02    | 6.03    |
|              | 100      | 1.08         | 15.90                    | 3.18    | 6.36    |
| 100          | 50       | 0.6          | 11.85                    | 2.37    | 4.74    |
|              | 60       | 0.72         | 12.98                    | 2.60    | 5.19    |
|              | 70       | 0.84         | 14.02                    | 2.80    | 5.61    |
|              | 80       | 0.96         | 14.99                    | 3.00    | 6.00    |
|              | 90       | 1.08         | 15.90                    | 3.18    | 6.36    |
|              | 100      | 1.2          | 16.76                    | 3.35    | 6.70    |
| 110          | 50       | 0.66         | 12.43                    | 2.49    | 4.97    |
|              | 60       | 0.792        | 13.61                    | 2.72    | 5.45    |
|              | 70       | 0.924        | 14.70                    | 2.94    | 5.88    |
|              | 80       | 1.056        | 15.72                    | 3.14    | 6.29    |
|              | 90       | 1.188        | 16.67                    | 3.33    | 6.67    |
|              | 100      | 1.32         | 17.57                    | 3.51    | 7.03    |
| 120          | 50       | 0.72         | 12.98                    | 2.60    | 5.19    |
|              | 60       | 0.864        | 14.22                    | 2.84    | 5.69    |
|              | 70       | 1.008        | 15.36                    | 3.07    | 6.14    |
|              | 80       | 1.152        | 16.42                    | 3.28    | 6.57    |
|              | 90       | 1.296        | 17.41                    | 3.48    | 6.97    |
|              | 100      | 1.44         | 18.36                    | 3.67    | 7.34    |
| 130          | 50       | 0.78         | 13.51                    | 2.70    | 5.40    |
|              | 60       | 0.936        | 14.80                    | 2.96    | 5.92    |
|              | 70       | 1.092        | 15.99                    | 3.20    | 6.39    |
|              | 80       | 1.248        | 17.09                    | 3.42    | 6.84    |
|              | 90       | 1.404        | 18.13                    | 3.63    | 7.25    |
|              | 100      | 1.56         | 19.11                    | 3.82    | 7.64    |
| 140          | 50       | 0.84         | 14.02                    | 2.80    | 5.61    |
|              | 60       | 1.008        | 15.36                    | 3.07    | 6.14    |
|              | 70       | 1.176        | 16.59                    | 3.32    | 6.64    |
|              | 80       | 1.344        | 17.73                    | 3.55    | 7.09    |
|              | 90       | 1.512        | 18.81                    | 3.76    | 7.52    |
|              | 100      | 1.68         | 19.83                    | 3.97    | 7.93    |
| 150          | 50       | 0.9          | 14.51                    | 2.90    | 5.80    |
|              | 60       | 1.08         | 15.90                    | 3.18    | 6.36    |
|              | 70       | 1.26         | 17.17                    | 3.43    | 6.87    |
|              | 80       | 1.44         | 18.36                    | 3.67    | 7.34    |
|              | 90       | 1.62         | 19.47                    | 3.89    | 7.79    |
|              | 100      | 1.8          | 20.52                    | 4.10    | 8.21    |

Table E-2: PEX pipe expansion arm calculations ½" to 3"



### 1½" PEX pipe expansion arm

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 160          | 50       | 0.96         | 14.99                    | 3.00    | 6.00    |
|              | 60       | 1.152        | 16.42                    | 3.28    | 6.57    |
|              | 70       | 1.344        | 17.73                    | 3.55    | 7.09    |
|              | 80       | 1.536        | 18.96                    | 3.79    | 7.58    |
|              | 90       | 1.728        | 20.11                    | 4.02    | 8.04    |
|              | 100      | 1.92         | 21.20                    | 4.24    | 8.48    |

### 2" PEX pipe expansion arm

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.06         | 4.28                     | 0.86    | 1.71    |
|              | 60       | 0.072        | 4.69                     | 0.94    | 1.88    |
|              | 70       | 0.084        | 5.07                     | 1.01    | 2.03    |
|              | 80       | 0.096        | 5.42                     | 1.08    | 2.17    |
|              | 90       | 0.108        | 5.75                     | 1.15    | 2.30    |
|              | 100      | 0.12         | 6.06                     | 1.21    | 2.42    |
| 20           | 50       | 0.12         | 6.06                     | 1.21    | 2.42    |
|              | 60       | 0.144        | 6.64                     | 1.33    | 2.66    |
|              | 70       | 0.168        | 7.17                     | 1.43    | 2.87    |
|              | 80       | 0.192        | 7.66                     | 1.53    | 3.07    |
|              | 90       | 0.216        | 8.13                     | 1.63    | 3.25    |
| 30           | 50       | 0.18         | 7.42                     | 1.48    | 2.97    |
|              | 60       | 0.216        | 8.13                     | 1.63    | 3.25    |
|              | 70       | 0.252        | 8.78                     | 1.76    | 3.51    |
|              | 80       | 0.288        | 9.39                     | 1.88    | 3.76    |
|              | 90       | 0.324        | 9.96                     | 1.99    | 3.98    |
| 40           | 50       | 0.24         | 8.57                     | 1.71    | 3.43    |
|              | 60       | 0.288        | 9.39                     | 1.88    | 3.76    |
|              | 70       | 0.336        | 10.14                    | 2.03    | 4.06    |
|              | 80       | 0.384        | 10.84                    | 2.17    | 4.34    |
|              | 90       | 0.432        | 11.50                    | 2.30    | 4.60    |
| 50           | 50       | 0.3          | 9.58                     | 1.92    | 3.83    |
|              | 60       | 0.36         | 10.50                    | 2.10    | 4.20    |
|              | 70       | 0.42         | 11.34                    | 2.27    | 4.53    |
|              | 80       | 0.48         | 12.12                    | 2.42    | 4.85    |
|              | 90       | 0.54         | 12.85                    | 2.57    | 5.14    |
| 100          | 0.6      | 13.55        | 2.71                     | 5.42    |         |

### 2" PEX pipe expansion arm

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 60           | 50       | 0.36         | 10.50                    | 2.10    | 4.20    |
|              | 60       | 0.432        | 11.50                    | 2.30    | 4.60    |
|              | 70       | 0.504        | 12.42                    | 2.48    | 4.97    |
|              | 80       | 0.576        | 13.28                    | 2.66    | 5.31    |
|              | 90       | 0.648        | 14.08                    | 2.82    | 5.63    |
|              | 100      | 0.72         | 14.84                    | 2.97    | 5.94    |
| 70           | 50       | 0.42         | 11.34                    | 2.27    | 4.53    |
|              | 60       | 0.504        | 12.42                    | 2.48    | 4.97    |
|              | 70       | 0.588        | 13.41                    | 2.68    | 5.37    |
|              | 80       | 0.672        | 14.34                    | 2.87    | 5.74    |
|              | 90       | 0.756        | 15.21                    | 3.04    | 6.08    |
| 80           | 50       | 0.48         | 12.12                    | 2.42    | 4.85    |
|              | 60       | 0.576        | 13.28                    | 2.66    | 5.31    |
|              | 70       | 0.672        | 14.34                    | 2.87    | 5.74    |
|              | 80       | 0.768        | 15.33                    | 3.07    | 6.13    |
|              | 90       | 0.864        | 16.26                    | 3.25    | 6.50    |
| 90           | 50       | 0.54         | 12.85                    | 2.57    | 5.14    |
|              | 60       | 0.648        | 14.08                    | 2.82    | 5.63    |
|              | 70       | 0.756        | 15.21                    | 3.04    | 6.08    |
|              | 80       | 0.864        | 16.26                    | 3.25    | 6.50    |
|              | 90       | 0.972        | 17.25                    | 3.45    | 6.90    |
| 100          | 50       | 0.6          | 13.55                    | 2.71    | 5.42    |
|              | 60       | 0.72         | 14.84                    | 2.97    | 5.94    |
|              | 70       | 0.84         | 16.03                    | 3.21    | 6.41    |
|              | 80       | 0.96         | 17.14                    | 3.43    | 6.86    |
|              | 90       | 1.08         | 18.18                    | 3.64    | 7.27    |
| 110          | 50       | 0.66         | 14.21                    | 2.84    | 5.68    |
|              | 60       | 0.792        | 15.57                    | 3.11    | 6.23    |
|              | 70       | 0.924        | 16.81                    | 3.36    | 6.73    |
|              | 80       | 1.056        | 17.98                    | 3.60    | 7.19    |
|              | 90       | 1.188        | 19.07                    | 3.81    | 7.63    |
| 120          | 50       | 0.72         | 14.84                    | 2.97    | 5.94    |
|              | 60       | 0.864        | 16.26                    | 3.25    | 6.50    |
|              | 70       | 1.008        | 17.56                    | 3.51    | 7.03    |
|              | 80       | 1.152        | 18.78                    | 3.76    | 7.51    |
|              | 90       | 1.296        | 19.91                    | 3.98    | 7.97    |
| 100          | 1.44     | 20.99        | 4.20                     | 8.40    |         |

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

Table E-2: PEX pipe expansion arm calculations ½" to 3"

### 2" PEX pipe expansion arm

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 130          | 50       | 0.78         | 15.45                    | 3.09    | 6.18    |
|              | 60       | 0.936        | 16.92                    | 3.38    | 6.77    |
|              | 70       | 1.092        | 18.28                    | 3.66    | 7.31    |
|              | 80       | 1.248        | 19.54                    | 3.91    | 7.82    |
|              | 90       | 1.404        | 20.73                    | 4.15    | 8.29    |
|              | 100      | 1.56         | 21.85                    | 4.37    | 8.74    |
| 140          | 50       | 0.84         | 16.03                    | 3.21    | 6.41    |
|              | 60       | 1.008        | 17.56                    | 3.51    | 7.03    |
|              | 70       | 1.176        | 18.97                    | 3.79    | 7.59    |
|              | 80       | 1.344        | 20.28                    | 4.06    | 8.11    |
|              | 90       | 1.512        | 21.51                    | 4.30    | 8.60    |
|              | 100      | 1.68         | 22.67                    | 4.53    | 9.07    |
| 150          | 50       | 0.9          | 16.60                    | 3.32    | 6.64    |
|              | 60       | 1.08         | 18.18                    | 3.64    | 7.27    |
|              | 70       | 1.26         | 19.64                    | 3.93    | 7.85    |
|              | 80       | 1.44         | 20.99                    | 4.20    | 8.40    |
|              | 90       | 1.62         | 22.26                    | 4.45    | 8.91    |
|              | 100      | 1.8          | 23.47                    | 4.69    | 9.39    |
| 160          | 50       | 0.96         | 17.14                    | 3.43    | 6.86    |
|              | 60       | 1.152        | 18.78                    | 3.76    | 7.51    |
|              | 70       | 1.344        | 20.28                    | 4.06    | 8.11    |
|              | 80       | 1.536        | 21.68                    | 4.34    | 8.67    |
|              | 90       | 1.728        | 22.99                    | 4.60    | 9.20    |
|              | 100      | 1.92         | 24.24                    | 4.85    | 9.70    |

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

Table E-2: PEX pipe expansion arm calculations ½" to 3"

### 2½" PEX pipe expansion arm

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.06         | 4.76                     | 0.95    | 1.90    |
|              | 60       | 0.072        | 5.22                     | 1.04    | 2.09    |
|              | 70       | 0.084        | 5.63                     | 1.13    | 2.25    |
|              | 80       | 0.096        | 6.02                     | 1.20    | 2.41    |
|              | 90       | 0.108        | 6.39                     | 1.28    | 2.56    |
|              | 100      | 0.12         | 6.73                     | 1.35    | 2.69    |
| 20           | 50       | 0.12         | 6.73                     | 1.35    | 2.69    |
|              | 60       | 0.144        | 7.38                     | 1.48    | 2.95    |
|              | 70       | 0.168        | 7.97                     | 1.59    | 3.19    |
|              | 80       | 0.192        | 8.52                     | 1.70    | 3.41    |
|              | 90       | 0.216        | 9.04                     | 1.81    | 3.61    |
|              | 100      | 0.24         | 9.52                     | 1.90    | 3.81    |

PEX with PEX-a Pipe Support and clevis hangers or loops

Table E-2: PEX pipe expansion arm calculations ½" to 3"

### 2½" PEX pipe expansion arm

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 30           | 50       | 0.18         | 8.25                     | 1.65    | 3.30    |
|              | 60       | 0.216        | 9.04                     | 1.81    | 3.61    |
|              | 70       | 0.252        | 9.76                     | 1.95    | 3.90    |
|              | 80       | 0.288        | 10.43                    | 2.09    | 4.17    |
|              | 90       | 0.324        | 11.07                    | 2.21    | 4.43    |
|              | 100      | 0.36         | 11.67                    | 2.33    | 4.67    |
| 40           | 50       | 0.24         | 9.52                     | 1.90    | 3.81    |
|              | 60       | 0.288        | 10.43                    | 2.09    | 4.17    |
|              | 70       | 0.336        | 11.27                    | 2.25    | 4.51    |
|              | 80       | 0.384        | 12.05                    | 2.41    | 4.82    |
|              | 90       | 0.432        | 12.78                    | 2.56    | 5.11    |
|              | 100      | 0.48         | 13.47                    | 2.69    | 5.39    |
| 50           | 50       | 0.3          | 10.65                    | 2.13    | 4.26    |
|              | 60       | 0.36         | 11.67                    | 2.33    | 4.67    |
|              | 70       | 0.42         | 12.60                    | 2.52    | 5.04    |
|              | 80       | 0.48         | 13.47                    | 2.69    | 5.39    |
|              | 90       | 0.54         | 14.29                    | 2.86    | 5.71    |
|              | 100      | 0.6          | 15.06                    | 3.01    | 6.02    |
| 60           | 50       | 0.36         | 11.67                    | 2.33    | 4.67    |
|              | 60       | 0.432        | 12.78                    | 2.56    | 5.11    |
|              | 70       | 0.504        | 13.80                    | 2.76    | 5.52    |
|              | 80       | 0.576        | 14.76                    | 2.95    | 5.90    |
|              | 90       | 0.648        | 15.65                    | 3.13    | 6.26    |
|              | 100      | 0.72         | 16.50                    | 3.30    | 6.60    |
| 70           | 50       | 0.42         | 12.60                    | 2.52    | 5.04    |
|              | 60       | 0.504        | 13.80                    | 2.76    | 5.52    |
|              | 70       | 0.588        | 14.91                    | 2.98    | 5.96    |
|              | 80       | 0.672        | 15.94                    | 3.19    | 6.38    |
|              | 90       | 0.756        | 16.90                    | 3.38    | 6.76    |
|              | 100      | 0.84         | 17.82                    | 3.56    | 7.13    |
| 80           | 50       | 0.48         | 13.47                    | 2.69    | 5.39    |
|              | 60       | 0.576        | 14.76                    | 2.95    | 5.90    |
|              | 70       | 0.672        | 15.94                    | 3.19    | 6.38    |
|              | 80       | 0.768        | 17.04                    | 3.41    | 6.82    |
|              | 90       | 0.864        | 18.07                    | 3.61    | 7.23    |
|              | 100      | 0.96         | 19.05                    | 3.81    | 7.62    |
| 90           | 50       | 0.54         | 14.29                    | 2.86    | 5.71    |
|              | 60       | 0.648        | 15.65                    | 3.13    | 6.26    |
|              | 70       | 0.756        | 16.90                    | 3.38    | 6.76    |
|              | 80       | 0.864        | 18.07                    | 3.61    | 7.23    |
|              | 90       | 0.972        | 19.17                    | 3.83    | 7.67    |
|              | 100      | 1.08         | 20.20                    | 4.04    | 8.08    |

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

### 2½" PEX pipe expansion arm

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 100          | 50       | 0.6          | 15.06                    | 3.01    | 6.02    |
|              | 60       | 0.72         | 16.50                    | 3.30    | 6.60    |
|              | 70       | 0.84         | 17.82                    | 3.56    | 7.13    |
|              | 80       | 0.96         | 19.05                    | 3.81    | 7.62    |
|              | 90       | 1.08         | 20.20                    | 4.04    | 8.08    |
|              | 100      | 1.2          | 21.30                    | 4.26    | 8.52    |
| 110          | 50       | 0.66         | 15.79                    | 3.16    | 6.32    |
|              | 60       | 0.792        | 17.30                    | 3.46    | 6.92    |
|              | 70       | 0.924        | 18.69                    | 3.74    | 7.48    |
|              | 80       | 1.056        | 19.98                    | 4.00    | 7.99    |
|              | 90       | 1.188        | 21.19                    | 4.24    | 8.48    |
|              | 100      | 1.32         | 22.34                    | 4.47    | 8.93    |
| 120          | 50       | 0.72         | 16.50                    | 3.30    | 6.60    |
|              | 60       | 0.864        | 18.07                    | 3.61    | 7.23    |
|              | 70       | 1.008        | 19.52                    | 3.90    | 7.81    |
|              | 80       | 1.152        | 20.87                    | 4.17    | 8.35    |
|              | 90       | 1.296        | 22.13                    | 4.43    | 8.85    |
|              | 100      | 1.44         | 23.33                    | 4.67    | 9.33    |
| 130          | 50       | 0.78         | 17.17                    | 3.43    | 6.87    |
|              | 60       | 0.936        | 18.81                    | 3.76    | 7.52    |
|              | 70       | 1.092        | 20.32                    | 4.06    | 8.13    |
|              | 80       | 1.248        | 21.72                    | 4.34    | 8.69    |
|              | 90       | 1.404        | 23.04                    | 4.61    | 9.21    |
|              | 100      | 1.56         | 24.28                    | 4.86    | 9.71    |
| 140          | 50       | 0.84         | 17.82                    | 3.56    | 7.13    |
|              | 60       | 1.008        | 19.52                    | 3.90    | 7.81    |
|              | 70       | 1.176        | 21.08                    | 4.22    | 8.43    |
|              | 80       | 1.344        | 22.54                    | 4.51    | 9.02    |
|              | 90       | 1.512        | 23.91                    | 4.78    | 9.56    |
|              | 100      | 1.68         | 25.20                    | 5.04    | 10.08   |
| 150          | 50       | 0.9          | 18.44                    | 3.69    | 7.38    |
|              | 60       | 1.08         | 20.20                    | 4.04    | 8.08    |
|              | 70       | 1.26         | 21.82                    | 4.36    | 8.73    |
|              | 80       | 1.44         | 23.33                    | 4.67    | 9.33    |
|              | 90       | 1.62         | 24.75                    | 4.95    | 9.90    |
|              | 100      | 1.8          | 26.08                    | 5.22    | 10.43   |
| 160          | 50       | 0.96         | 19.05                    | 3.81    | 7.62    |
|              | 60       | 1.152        | 20.87                    | 4.17    | 8.35    |
|              | 70       | 1.344        | 22.54                    | 4.51    | 9.02    |
|              | 80       | 1.536        | 24.10                    | 4.82    | 9.64    |
|              | 90       | 1.728        | 25.56                    | 5.11    | 10.22   |
|              | 100      | 1.92         | 26.94                    | 5.39    | 10.78   |

### 3" PEX pipe expansion arm

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.06         | 5.20                     | 1.04    | 2.08    |
|              | 60       | 0.072        | 5.69                     | 1.14    | 2.28    |
|              | 70       | 0.084        | 6.15                     | 1.23    | 2.46    |
|              | 80       | 0.096        | 6.57                     | 1.31    | 2.63    |
|              | 90       | 0.108        | 6.97                     | 1.39    | 2.79    |
|              | 100      | 0.12         | 7.35                     | 1.47    | 2.94    |
| 20           | 50       | 0.12         | 7.35                     | 1.47    | 2.94    |
|              | 60       | 0.144        | 8.05                     | 1.61    | 3.22    |
|              | 70       | 0.168        | 8.69                     | 1.74    | 3.48    |
|              | 80       | 0.192        | 9.30                     | 1.86    | 3.72    |
|              | 90       | 0.216        | 9.86                     | 1.97    | 3.94    |
|              | 100      | 0.24         | 10.39                    | 2.08    | 4.16    |
| 30           | 50       | 0.18         | 9.00                     | 1.80    | 3.60    |
|              | 60       | 0.216        | 9.86                     | 1.97    | 3.94    |
|              | 70       | 0.252        | 10.65                    | 2.13    | 4.26    |
|              | 80       | 0.288        | 11.38                    | 2.28    | 4.55    |
|              | 90       | 0.324        | 12.07                    | 2.41    | 4.83    |
|              | 100      | 0.36         | 12.73                    | 2.55    | 5.09    |
| 40           | 50       | 0.24         | 10.39                    | 2.08    | 4.16    |
|              | 60       | 0.288        | 11.38                    | 2.28    | 4.55    |
|              | 70       | 0.336        | 12.30                    | 2.46    | 4.92    |
|              | 80       | 0.384        | 13.15                    | 2.63    | 5.26    |
|              | 90       | 0.432        | 13.94                    | 2.79    | 5.58    |
|              | 100      | 0.48         | 14.70                    | 2.94    | 5.88    |
| 50           | 50       | 0.3          | 11.62                    | 2.32    | 4.65    |
|              | 60       | 0.36         | 12.73                    | 2.55    | 5.09    |
|              | 70       | 0.42         | 13.75                    | 2.75    | 5.50    |
|              | 80       | 0.48         | 14.70                    | 2.94    | 5.88    |
|              | 90       | 0.54         | 15.59                    | 3.12    | 6.24    |
|              | 100      | 0.6          | 16.43                    | 3.29    | 6.57    |
| 60           | 50       | 0.36         | 12.73                    | 2.55    | 5.09    |
|              | 60       | 0.432        | 13.94                    | 2.79    | 5.58    |
|              | 70       | 0.504        | 15.06                    | 3.01    | 6.02    |
|              | 80       | 0.576        | 16.10                    | 3.22    | 6.44    |
|              | 90       | 0.648        | 17.08                    | 3.42    | 6.83    |
|              | 100      | 0.72         | 18.00                    | 3.60    | 7.20    |
| 70           | 50       | 0.42         | 13.75                    | 2.75    | 5.50    |
|              | 60       | 0.504        | 15.06                    | 3.01    | 6.02    |
|              | 70       | 0.588        | 16.27                    | 3.25    | 6.51    |
|              | 80       | 0.672        | 17.39                    | 3.48    | 6.96    |
|              | 90       | 0.756        | 18.44                    | 3.69    | 7.38    |
|              | 100      | 0.84         | 19.44                    | 3.89    | 7.78    |

Table E-2: PEX pipe expansion arm calculations ½" to 3"

### 3" PEX pipe expansion arm

PEX with PEX-a Pipe Support and clevis hangers or loops has a thermal expansion rate of 0.12/10°F ΔT/100 ft. (3.05mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 80           | 50       | 0.48         | 14.70                    | 2.94    | 5.88    |
|              | 60       | 0.576        | 16.10                    | 3.22    | 6.44    |
|              | 70       | 0.672        | 17.39                    | 3.48    | 6.96    |
|              | 80       | 0.768        | 18.59                    | 3.72    | 7.44    |
|              | 90       | 0.864        | 19.72                    | 3.94    | 7.89    |
|              | 100      | 0.96         | 20.78                    | 4.16    | 8.31    |
| 90           | 50       | 0.54         | 15.59                    | 3.12    | 6.24    |
|              | 60       | 0.648        | 17.08                    | 3.42    | 6.83    |
|              | 70       | 0.756        | 18.44                    | 3.69    | 7.38    |
|              | 80       | 0.864        | 19.72                    | 3.94    | 7.89    |
|              | 90       | 0.972        | 20.91                    | 4.18    | 8.37    |
|              | 100      | 1.08         | 22.05                    | 4.41    | 8.82    |
| 100          | 50       | 0.6          | 16.43                    | 3.29    | 6.57    |
|              | 60       | 0.72         | 18.00                    | 3.60    | 7.20    |
|              | 70       | 0.84         | 19.44                    | 3.89    | 7.78    |
|              | 80       | 0.96         | 20.78                    | 4.16    | 8.31    |
|              | 90       | 1.08         | 22.05                    | 4.41    | 8.82    |
|              | 100      | 1.2          | 23.24                    | 4.65    | 9.30    |
| 110          | 50       | 0.66         | 17.23                    | 3.45    | 6.89    |
|              | 60       | 0.792        | 18.88                    | 3.78    | 7.55    |
|              | 70       | 0.924        | 20.39                    | 4.08    | 8.16    |
|              | 80       | 1.056        | 21.80                    | 4.36    | 8.72    |
|              | 90       | 1.188        | 23.12                    | 4.62    | 9.25    |
|              | 100      | 1.32         | 24.37                    | 4.87    | 9.75    |
| 120          | 50       | 0.72         | 18.00                    | 3.60    | 7.20    |
|              | 60       | 0.864        | 19.72                    | 3.94    | 7.89    |
|              | 70       | 1.008        | 21.30                    | 4.26    | 8.52    |
|              | 80       | 1.152        | 22.77                    | 4.55    | 9.11    |
|              | 90       | 1.296        | 24.15                    | 4.83    | 9.66    |
|              | 100      | 1.44         | 25.46                    | 5.09    | 10.18   |
| 130          | 50       | 0.78         | 18.73                    | 3.75    | 7.49    |
|              | 60       | 0.936        | 20.52                    | 4.10    | 8.21    |
|              | 70       | 1.092        | 22.17                    | 4.43    | 8.87    |
|              | 80       | 1.248        | 23.70                    | 4.74    | 9.48    |
|              | 90       | 1.404        | 25.14                    | 5.03    | 10.05   |
|              | 100      | 1.56         | 26.50                    | 5.30    | 10.60   |
| 140          | 50       | 0.84         | 19.44                    | 3.89    | 7.78    |
|              | 60       | 1.008        | 21.30                    | 4.26    | 8.52    |
|              | 70       | 1.176        | 23.00                    | 4.60    | 9.20    |
|              | 80       | 1.344        | 24.59                    | 4.92    | 9.84    |
|              | 90       | 1.512        | 26.08                    | 5.22    | 10.43   |
|              | 100      | 1.68         | 27.50                    | 5.50    | 11.00   |

### 3" PEX pipe expansion arm

PEX with PEX-a Pipe Support and clevis hangers or loops

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 150          | 50       | 0.9          | 20.12                    | 4.02    | 8.05    |
|              | 60       | 1.08         | 22.05                    | 4.41    | 8.82    |
|              | 70       | 1.26         | 23.81                    | 4.76    | 9.52    |
|              | 80       | 1.44         | 25.46                    | 5.09    | 10.18   |
|              | 90       | 1.62         | 27.00                    | 5.40    | 10.80   |
|              | 100      | 1.8          | 28.46                    | 5.69    | 11.38   |
| 160          | 50       | 0.96         | 20.78                    | 4.16    | 8.31    |
|              | 60       | 1.152        | 22.77                    | 4.55    | 9.11    |
|              | 70       | 1.344        | 24.59                    | 4.92    | 9.84    |
|              | 80       | 1.536        | 26.29                    | 5.26    | 10.52   |
|              | 90       | 1.728        | 27.89                    | 5.58    | 11.15   |
|              | 100      | 1.92         | 29.39                    | 5.88    | 11.76   |

Table E-2: PEX pipe expansion arm calculations ½" to 3"

## PEX has a free-body

thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m)

### ½" PEX pipe expansion arm

PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.55         | 7.04                     | 1.41    | 2.81    |
|              | 60       | 0.66         | 7.71                     | 1.54    | 3.08    |
|              | 70       | 0.77         | 8.32                     | 1.66    | 3.33    |
|              | 80       | 0.88         | 8.90                     | 1.78    | 3.56    |
|              | 90       | 0.99         | 9.44                     | 1.89    | 3.78    |
|              | 100      | 1.1          | 9.95                     | 1.99    | 3.98    |
| 20           | 50       | 1.1          | 9.95                     | 1.99    | 3.98    |
|              | 60       | 1.32         | 10.90                    | 2.18    | 4.36    |
|              | 70       | 1.54         | 11.77                    | 2.35    | 4.71    |
|              | 80       | 1.76         | 12.59                    | 2.52    | 5.03    |
|              | 90       | 1.98         | 13.35                    | 2.67    | 5.34    |
|              | 100      | 2.2          | 14.07                    | 2.81    | 5.63    |
| 30           | 50       | 1.65         | 12.19                    | 2.44    | 4.87    |
|              | 60       | 1.98         | 13.35                    | 2.67    | 5.34    |
|              | 70       | 2.31         | 14.42                    | 2.88    | 5.77    |
|              | 80       | 2.64         | 15.41                    | 3.08    | 6.17    |
|              | 90       | 2.97         | 16.35                    | 3.27    | 6.54    |
|              | 100      | 3.3          | 17.23                    | 3.45    | 6.89    |
| 40           | 50       | 2.2          | 14.07                    | 2.81    | 5.63    |
|              | 60       | 2.64         | 15.41                    | 3.08    | 6.17    |
|              | 70       | 3.08         | 16.65                    | 3.33    | 6.66    |
|              | 80       | 3.52         | 17.80                    | 3.56    | 7.12    |
|              | 90       | 3.96         | 18.88                    | 3.78    | 7.55    |
|              | 100      | 4.4          | 19.90                    | 3.98    | 7.96    |
| 50           | 50       | 2.75         | 15.73                    | 3.15    | 6.29    |
|              | 60       | 3.3          | 17.23                    | 3.45    | 6.89    |
|              | 70       | 3.85         | 18.61                    | 3.72    | 7.45    |
|              | 80       | 4.4          | 19.90                    | 3.98    | 7.96    |
|              | 90       | 4.95         | 21.11                    | 4.22    | 8.44    |
|              | 100      | 5.5          | 22.25                    | 4.45    | 8.90    |
| 60           | 50       | 3.3          | 17.23                    | 3.45    | 6.89    |
|              | 60       | 3.96         | 18.88                    | 3.78    | 7.55    |
|              | 70       | 4.62         | 20.39                    | 4.08    | 8.16    |
|              | 80       | 5.28         | 21.80                    | 4.36    | 8.72    |
|              | 90       | 5.94         | 23.12                    | 4.62    | 9.25    |
|              | 100      | 6.6          | 24.37                    | 4.87    | 9.75    |

### ½" PEX pipe expansion arm

PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 70           | 50       | 3.85         | 18.61                    | 3.72    | 7.45    |
|              | 60       | 4.62         | 20.39                    | 4.08    | 8.16    |
|              | 70       | 5.39         | 22.02                    | 4.40    | 8.81    |
|              | 80       | 6.16         | 23.55                    | 4.71    | 9.42    |
|              | 90       | 6.93         | 24.97                    | 4.99    | 9.99    |
|              | 100      | 7.7          | 26.32                    | 5.26    | 10.53   |
| 80           | 50       | 4.4          | 19.90                    | 3.98    | 7.96    |
|              | 60       | 5.28         | 21.80                    | 4.36    | 8.72    |
|              | 70       | 6.16         | 23.55                    | 4.71    | 9.42    |
|              | 80       | 7.04         | 25.17                    | 5.03    | 10.07   |
|              | 90       | 7.92         | 26.70                    | 5.34    | 10.68   |
|              | 100      | 8.8          | 28.14                    | 5.63    | 11.26   |
| 90           | 50       | 4.95         | 21.11                    | 4.22    | 8.44    |
|              | 60       | 5.94         | 23.12                    | 4.62    | 9.25    |
|              | 70       | 6.93         | 24.97                    | 4.99    | 9.99    |
|              | 80       | 7.92         | 26.70                    | 5.34    | 10.68   |
|              | 90       | 8.91         | 28.32                    | 5.66    | 11.33   |
|              | 100      | 9.9          | 29.85                    | 5.97    | 11.94   |
| 100          | 50       | 5.5          | 22.25                    | 4.45    | 8.90    |
|              | 60       | 6.6          | 24.37                    | 4.87    | 9.75    |
|              | 70       | 7.7          | 26.32                    | 5.26    | 10.53   |
|              | 80       | 8.8          | 28.14                    | 5.63    | 11.26   |
|              | 90       | 9.9          | 29.85                    | 5.97    | 11.94   |
|              | 100      | 11           | 31.46                    | 6.29    | 12.59   |
| 110          | 50       | 6.05         | 23.33                    | 4.67    | 9.33    |
|              | 60       | 7.26         | 25.56                    | 5.11    | 10.22   |
|              | 70       | 8.47         | 27.61                    | 5.52    | 11.04   |
|              | 80       | 9.68         | 29.52                    | 5.90    | 11.81   |
|              | 90       | 10.89        | 31.31                    | 6.26    | 12.52   |
|              | 100      | 12.1         | 33.00                    | 6.60    | 13.20   |
| 120          | 50       | 6.6          | 24.37                    | 4.87    | 9.75    |
|              | 60       | 7.92         | 26.70                    | 5.34    | 10.68   |
|              | 70       | 9.24         | 28.84                    | 5.77    | 11.53   |
|              | 80       | 10.56        | 30.83                    | 6.17    | 12.33   |
|              | 90       | 11.88        | 32.70                    | 6.54    | 13.08   |
|              | 100      | 13.2         | 34.47                    | 6.89    | 13.79   |

Table E-3: PEX pipe expansion arm calculations ½" to 3"

### ½" PEX pipe expansion arm

| PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m). | Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |       |
|--|--------------|----------|--------------|--------------------------|---------|---------|-------|
|  | 130          | 50       | 50           | 7.15                     | 25.37   | 5.07    | 10.15 |
|  |              | 60       | 60           | 8.58                     | 27.79   | 5.56    | 11.12 |
|  |              | 70       | 70           | 10.01                    | 30.01   | 6.00    | 12.01 |
|  |              | 80       | 80           | 11.44                    | 32.09   | 6.42    | 12.83 |
|  |              | 90       | 90           | 12.87                    | 34.03   | 6.81    | 13.61 |
|  |              | 100      | 100          | 14.3                     | 35.87   | 7.17    | 14.35 |
|  | 140          | 50       | 50           | 7.7                      | 26.32   | 5.26    | 10.53 |
|  |              | 60       | 60           | 9.24                     | 28.84   | 5.77    | 11.53 |
|  |              | 70       | 70           | 10.78                    | 31.15   | 6.23    | 12.46 |
| 80   |              | 80       | 12.32        | 33.30                    | 6.66    | 13.32   |       |
| 90   |              | 90       | 13.86        | 35.32                    | 7.06    | 14.13   |       |
| 100  |              | 100      | 15.4         | 37.23                    | 7.45    | 14.89   |       |
| 150  | 50           | 50       | 8.25         | 27.25                    | 5.45    | 10.90   |       |
|  | 60           | 60       | 9.9          | 29.85                    | 5.97    | 11.94   |       |
|  | 70           | 70       | 11.55        | 32.24                    | 6.45    | 12.90   |       |
|  | 80           | 80       | 13.2         | 34.47                    | 6.89    | 13.79   |       |
|  | 90           | 90       | 14.85        | 36.56                    | 7.31    | 14.62   |       |
|  | 100          | 100      | 16.5         | 38.54                    | 7.71    | 15.41   |       |
| 160  | 50           | 50       | 8.8          | 28.14                    | 5.63    | 11.26   |       |
|  | 60           | 60       | 10.56        | 30.83                    | 6.17    | 12.33   |       |
|  | 70           | 70       | 12.32        | 33.30                    | 6.66    | 13.32   |       |
|  | 80           | 80       | 14.08        | 35.60                    | 7.12    | 14.24   |       |
|  | 90           | 90       | 15.84        | 37.76                    | 7.55    | 15.10   |       |
|  | 100          | 100      | 17.6         | 39.80                    | 7.96    | 15.92   |       |

Table E-3: PEX pipe expansion arm calculations ½" to 3"

### ¾" PEX pipe expansion arm

| PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m). | Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |      |
|--|--------------|----------|--------------|--------------------------|---------|---------|------|
|  | 30           | 50       | 50           | 1.65                     | 14.42   | 2.88    | 5.77 |
|  |              | 60       | 60           | 1.98                     | 15.79   | 3.16    | 6.32 |
|  |              | 70       | 70           | 2.31                     | 17.06   | 3.41    | 6.82 |
|  |              | 80       | 80           | 2.64                     | 18.24   | 3.65    | 7.30 |
|  |              | 90       | 90           | 2.97                     | 19.34   | 3.87    | 7.74 |
|  |              | 100      | 100          | 3.3                      | 20.39   | 4.08    | 8.16 |
|  | 40           | 50       | 50           | 2.2                      | 16.65   | 3.33    | 6.66 |
|  |              | 60       | 60           | 2.64                     | 18.24   | 3.65    | 7.30 |
|  |              | 70       | 70           | 3.08                     | 19.70   | 3.94    | 7.88 |
| 80   |              | 80       | 3.52         | 21.06                    | 4.21    | 8.42    |      |
| 90   |              | 90       | 3.96         | 22.34                    | 4.47    | 8.93    |      |
| 100  |              | 100      | 4.4          | 23.55                    | 4.71    | 9.42    |      |
| 50   | 50           | 50       | 2.75         | 18.61                    | 3.72    | 7.45    |      |
|  | 60           | 60       | 3.3          | 20.39                    | 4.08    | 8.16    |      |
|  | 70           | 70       | 3.85         | 22.02                    | 4.40    | 8.81    |      |
|  | 80           | 80       | 4.4          | 23.55                    | 4.71    | 9.42    |      |
|  | 90           | 90       | 4.95         | 24.97                    | 4.99    | 9.99    |      |
|  | 100          | 100      | 5.5          | 26.32                    | 5.26    | 10.53   |      |
| 60   | 50           | 50       | 3.3          | 20.39                    | 4.08    | 8.16    |      |
|  | 60           | 60       | 3.96         | 22.34                    | 4.47    | 8.93    |      |
|  | 70           | 70       | 4.62         | 24.13                    | 4.83    | 9.65    |      |
|  | 80           | 80       | 5.28         | 25.79                    | 5.16    | 10.32   |      |
|  | 90           | 90       | 5.94         | 27.36                    | 5.47    | 10.94   |      |
|  | 100          | 100      | 6.6          | 28.84                    | 5.77    | 11.53   |      |
| 70   | 50           | 50       | 3.85         | 22.02                    | 4.40    | 8.81    |      |
|  | 60           | 60       | 4.62         | 24.13                    | 4.83    | 9.65    |      |
|  | 70           | 70       | 5.39         | 26.06                    | 5.21    | 10.42   |      |
|  | 80           | 80       | 6.16         | 27.86                    | 5.57    | 11.14   |      |
|  | 90           | 90       | 6.93         | 29.55                    | 5.91    | 11.82   |      |
|  | 100          | 100      | 7.7          | 31.15                    | 6.23    | 12.46   |      |
| 80   | 50           | 50       | 4.4          | 23.55                    | 4.71    | 9.42    |      |
|  | 60           | 60       | 5.28         | 25.79                    | 5.16    | 10.32   |      |
|  | 70           | 70       | 6.16         | 27.86                    | 5.57    | 11.14   |      |
|  | 80           | 80       | 7.04         | 29.78                    | 5.96    | 11.91   |      |
|  | 90           | 90       | 7.92         | 31.59                    | 6.32    | 12.64   |      |
|  | 100          | 100      | 8.8          | 33.30                    | 6.66    | 13.32   |      |
| 90   | 50           | 50       | 4.95         | 24.97                    | 4.99    | 9.99    |      |
|  | 60           | 60       | 5.94         | 27.36                    | 5.47    | 10.94   |      |
|  | 70           | 70       | 6.93         | 29.55                    | 5.91    | 11.82   |      |
|  | 80           | 80       | 7.92         | 31.59                    | 6.32    | 12.64   |      |
|  | 90           | 90       | 8.91         | 33.51                    | 6.70    | 13.40   |      |
|  | 100          | 100      | 9.9          | 35.32                    | 7.06    | 14.13   |      |

Table E-3: PEX pipe expansion arm calculations ½" to 3"

### ¾" PEX pipe expansion arm

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |      |
|--------------|----------|--------------|--------------------------|---------|---------|------|
| 10           | 50       | 50           | 0.55                     | 8.32    | 1.66    | 3.33 |
|              | 60       | 60           | 0.66                     | 9.12    | 1.82    | 3.65 |
|              | 70       | 70           | 0.77                     | 9.85    | 1.97    | 3.94 |
|              | 80       | 80           | 0.88                     | 10.53   | 2.11    | 4.21 |
|              | 90       | 90           | 0.99                     | 11.17   | 2.23    | 4.47 |
|              | 100      | 100          | 1.1                      | 11.77   | 2.35    | 4.71 |
| 20           | 50       | 50           | 1.1                      | 11.77   | 2.35    | 4.71 |
|              | 60       | 60           | 1.32                     | 12.90   | 2.58    | 5.16 |
|              | 70       | 70           | 1.54                     | 13.93   | 2.79    | 5.57 |
|              | 80       | 80           | 1.76                     | 14.89   | 2.98    | 5.96 |
|              | 90       | 90           | 1.98                     | 15.79   | 3.16    | 6.32 |
|              | 100      | 100          | 2.2                      | 16.65   | 3.33    | 6.66 |

**3/4" PEX pipe expansion arm**

| PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m). | Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |       |
|--|--------------|----------|--------------|--------------------------|---------|---------|-------|
|  | 100          | 50       | 50           | 5.5                      | 26.32   | 5.26    | 10.53 |
|  |              | 60       | 60           | 6.6                      | 28.84   | 5.77    | 11.53 |
|  |              | 70       | 70           | 7.7                      | 31.15   | 6.23    | 12.46 |
|  |              | 80       | 80           | 8.8                      | 33.30   | 6.66    | 13.32 |
|  |              | 90       | 90           | 9.9                      | 35.32   | 7.06    | 14.13 |
|  | 100          | 100      | 11           | 37.23                    | 7.45    | 14.89   |       |
|  | 110          | 50       | 50           | 6.05                     | 27.61   | 5.52    | 11.04 |
|  |              | 60       | 60           | 7.26                     | 30.24   | 6.05    | 12.10 |
|  |              | 70       | 70           | 8.47                     | 32.67   | 6.53    | 13.07 |
| 80   |              | 80       | 9.68         | 34.92                    | 6.98    | 13.97   |       |
| 90   |              | 90       | 10.89        | 37.04                    | 7.41    | 14.82   |       |
| 100  | 100          | 12.1     | 39.05        | 7.81                     | 15.62   |         |       |
| 120  | 50           | 50       | 6.6          | 28.84                    | 5.77    | 11.53   |       |
|  | 60           | 60       | 7.92         | 31.59                    | 6.32    | 12.64   |       |
|  | 70           | 70       | 9.24         | 34.12                    | 6.82    | 13.65   |       |
|  | 80           | 80       | 10.56        | 36.48                    | 7.30    | 14.59   |       |
|  | 90           | 90       | 11.88        | 38.69                    | 7.74    | 15.48   |       |
| 100  | 100          | 13.2     | 40.78        | 8.16                     | 16.31   |         |       |
| 130  | 50           | 50       | 7.15         | 30.01                    | 6.00    | 12.01   |       |
|  | 60           | 60       | 8.58         | 32.88                    | 6.58    | 13.15   |       |
|  | 70           | 70       | 10.01        | 35.51                    | 7.10    | 14.21   |       |
|  | 80           | 80       | 11.44        | 37.97                    | 7.59    | 15.19   |       |
|  | 90           | 90       | 12.87        | 40.27                    | 8.05    | 16.11   |       |
| 100  | 100          | 14.3     | 42.45        | 8.49                     | 16.98   |         |       |
| 140  | 50           | 50       | 7.7          | 31.15                    | 6.23    | 12.46   |       |
|  | 60           | 60       | 9.24         | 34.12                    | 6.82    | 13.65   |       |
|  | 70           | 70       | 10.78        | 36.85                    | 7.37    | 14.74   |       |
|  | 80           | 80       | 12.32        | 39.40                    | 7.88    | 15.76   |       |
|  | 90           | 90       | 13.86        | 41.79                    | 8.36    | 16.72   |       |
| 100  | 100          | 15.4     | 44.05        | 8.81                     | 17.62   |         |       |
| 150  | 50           | 50       | 8.25         | 32.24                    | 6.45    | 12.90   |       |
|  | 60           | 60       | 9.9          | 35.32                    | 7.06    | 14.13   |       |
|  | 70           | 70       | 11.55        | 38.15                    | 7.63    | 15.26   |       |
|  | 80           | 80       | 13.2         | 40.78                    | 8.16    | 16.31   |       |
|  | 90           | 90       | 14.85        | 43.26                    | 8.65    | 17.30   |       |
| 100  | 100          | 16.5     | 45.60        | 9.12                     | 18.24   |         |       |
| 160  | 50           | 50       | 8.8          | 33.30                    | 6.66    | 13.32   |       |
|  | 60           | 60       | 10.56        | 36.48                    | 7.30    | 14.59   |       |
|  | 70           | 70       | 12.32        | 39.40                    | 7.88    | 15.76   |       |
|  | 80           | 80       | 14.08        | 42.12                    | 8.42    | 16.85   |       |
|  | 90           | 90       | 15.84        | 44.67                    | 8.93    | 17.87   |       |
| 100  | 100          | 17.6     | 47.09        | 9.42                     | 18.84   |         |       |

**1" PEX pipe expansion arm**

| PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m). | Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |      |
|--|--------------|----------|--------------|--------------------------|---------|---------|------|
|  | 10           | 50       | 50           | 0.55                     | 9.44    | 1.89    | 3.78 |
|  |              | 60       | 60           | 0.66                     | 10.34   | 2.07    | 4.14 |
|  |              | 70       | 70           | 0.77                     | 11.17   | 2.23    | 4.47 |
|  |              | 80       | 80           | 0.88                     | 11.94   | 2.39    | 4.78 |
|  |              | 90       | 90           | 0.99                     | 12.66   | 2.53    | 5.07 |
|  | 100          | 100      | 1.1          | 13.35                    | 2.67    | 5.34    |      |
|  | 20           | 50       | 50           | 1.1                      | 13.35   | 2.67    | 5.34 |
|  |              | 60       | 60           | 1.32                     | 14.62   | 2.92    | 5.85 |
|  |              | 70       | 70           | 1.54                     | 15.79   | 3.16    | 6.32 |
| 80   |              | 80       | 1.76         | 16.89                    | 3.38    | 6.75    |      |
| 90   |              | 90       | 1.98         | 17.91                    | 3.58    | 7.16    |      |
| 100  | 100          | 2.2      | 18.88        | 3.78                     | 7.55    |         |      |
| 30   | 50           | 50       | 1.65         | 16.35                    | 3.27    | 6.54    |      |
|  | 60           | 60       | 1.98         | 17.91                    | 3.58    | 7.16    |      |
|  | 70           | 70       | 2.31         | 19.34                    | 3.87    | 7.74    |      |
|  | 80           | 80       | 2.64         | 20.68                    | 4.14    | 8.27    |      |
|  | 90           | 90       | 2.97         | 21.93                    | 4.39    | 8.77    |      |
| 100  | 100          | 3.3      | 23.12        | 4.62                     | 9.25    |         |      |
| 40   | 50           | 50       | 2.2          | 18.88                    | 3.78    | 7.55    |      |
|  | 60           | 60       | 0.66         | 10.34                    | 2.07    | 4.14    |      |
|  | 70           | 70       | 0.77         | 11.17                    | 2.23    | 4.47    |      |
|  | 80           | 80       | 0.88         | 11.94                    | 2.39    | 4.78    |      |
|  | 90           | 90       | 0.99         | 12.66                    | 2.53    | 5.07    |      |
| 100  | 100          | 1.1      | 13.35        | 2.67                     | 5.34    |         |      |
| 50   | 50           | 50       | 2.75         | 21.11                    | 4.22    | 8.44    |      |
|  | 60           | 60       | 3.3          | 23.12                    | 4.62    | 9.25    |      |
|  | 70           | 70       | 3.85         | 24.97                    | 4.99    | 9.99    |      |
|  | 80           | 80       | 4.4          | 26.70                    | 5.34    | 10.68   |      |
|  | 90           | 90       | 4.95         | 28.32                    | 5.66    | 11.33   |      |
| 100  | 100          | 5.5      | 29.85        | 5.97                     | 11.94   |         |      |
| 60   | 50           | 50       | 3.3          | 23.12                    | 4.62    | 9.25    |      |
|  | 60           | 60       | 3.96         | 25.33                    | 5.07    | 10.13   |      |
|  | 70           | 70       | 4.62         | 27.36                    | 5.47    | 10.94   |      |
|  | 80           | 80       | 5.28         | 29.25                    | 5.85    | 11.70   |      |
|  | 90           | 90       | 5.94         | 31.02                    | 6.20    | 12.41   |      |
| 100  | 100          | 6.6      | 32.70        | 6.54                     | 13.08   |         |      |
| 70   | 50           | 50       | 3.85         | 24.97                    | 4.99    | 9.99    |      |
|  | 60           | 60       | 4.62         | 27.36                    | 5.47    | 10.94   |      |
|  | 70           | 70       | 5.39         | 29.55                    | 5.91    | 11.82   |      |
|  | 80           | 80       | 6.16         | 31.59                    | 6.32    | 12.64   |      |
|  | 90           | 90       | 6.93         | 33.51                    | 6.70    | 13.40   |      |
| 100  | 100          | 7.7      | 35.32        | 7.06                     | 14.13   |         |      |

**Table E-3: PEX pipe expansion arm calculations 1/2" to 3"**

### 1" PEX pipe expansion arm

PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 80           | 50       | 4.4          | 26.70                    | 5.34    | 10.68   |
|              | 60       | 5.28         | 29.25                    | 5.85    | 11.70   |
|              | 70       | 6.16         | 31.59                    | 6.32    | 12.64   |
|              | 80       | 7.04         | 33.77                    | 6.75    | 13.51   |
|              | 90       | 7.92         | 35.82                    | 7.16    | 14.33   |
|              | 100      | 8.8          | 37.76                    | 7.55    | 15.10   |
| 90           | 50       | 0.55         | 9.44                     | 1.89    | 3.78    |
|              | 60       | 0.66         | 10.34                    | 2.07    | 4.14    |
|              | 70       | 0.77         | 11.17                    | 2.23    | 4.47    |
|              | 80       | 0.88         | 11.94                    | 2.39    | 4.78    |
|              | 90       | 0.99         | 12.66                    | 2.53    | 5.07    |
|              | 100      | 1.1          | 13.35                    | 2.67    | 5.34    |
| 100          | 50       | 1.1          | 13.35                    | 2.67    | 5.34    |
|              | 60       | 1.32         | 14.62                    | 2.92    | 5.85    |
|              | 70       | 1.54         | 15.79                    | 3.16    | 6.32    |
|              | 80       | 1.76         | 16.89                    | 3.38    | 6.75    |
|              | 90       | 1.98         | 17.91                    | 3.58    | 7.16    |
|              | 100      | 2.2          | 18.88                    | 3.78    | 7.55    |
| 110          | 50       | 6.05         | 31.31                    | 6.26    | 12.52   |
|              | 60       | 7.26         | 34.29                    | 6.86    | 13.72   |
|              | 70       | 8.47         | 37.04                    | 7.41    | 14.82   |
|              | 80       | 9.68         | 39.60                    | 7.92    | 15.84   |
|              | 90       | 10.89        | 42.00                    | 8.40    | 16.80   |
|              | 100      | 12.1         | 44.27                    | 8.85    | 17.71   |
| 120          | 50       | 6.6          | 32.70                    | 6.54    | 13.08   |
|              | 60       | 7.92         | 35.82                    | 7.16    | 14.33   |
|              | 70       | 9.24         | 38.69                    | 7.74    | 15.48   |
|              | 80       | 10.56        | 41.36                    | 8.27    | 16.54   |
|              | 90       | 11.88        | 43.87                    | 8.77    | 17.55   |
|              | 100      | 13.2         | 46.24                    | 9.25    | 18.50   |
| 130          | 50       | 7.15         | 34.03                    | 6.81    | 13.61   |
|              | 60       | 8.58         | 37.28                    | 7.46    | 14.91   |
|              | 70       | 10.01        | 40.27                    | 8.05    | 16.11   |
|              | 80       | 11.44        | 43.05                    | 8.61    | 17.22   |
|              | 90       | 12.87        | 45.66                    | 9.13    | 18.26   |
|              | 100      | 14.3         | 48.13                    | 9.63    | 19.25   |
| 140          | 50       | 7.7          | 35.32                    | 7.06    | 14.13   |
|              | 60       | 9.24         | 38.69                    | 7.74    | 15.48   |
|              | 70       | 10.78        | 41.79                    | 8.36    | 16.72   |
|              | 80       | 12.32        | 44.67                    | 8.93    | 17.87   |
|              | 90       | 13.86        | 47.38                    | 9.48    | 18.95   |
|              | 100      | 15.4         | 49.95                    | 9.99    | 19.98   |

### 1" PEX pipe expansion arm

PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 150          | 50       | 8.25         | 36.56                    | 7.31    | 14.62   |
|              | 60       | 9.9          | 40.05                    | 8.01    | 16.02   |
|              | 70       | 11.55        | 43.26                    | 8.65    | 17.30   |
|              | 80       | 13.2         | 46.24                    | 9.25    | 18.50   |
|              | 90       | 14.85        | 49.05                    | 9.81    | 19.62   |
|              | 100      | 16.5         | 51.70                    | 10.34   | 20.68   |
| 160          | 50       | 8.8          | 37.76                    | 7.55    | 15.10   |
|              | 60       | 10.56        | 41.36                    | 8.27    | 16.54   |
|              | 70       | 12.32        | 44.67                    | 8.93    | 17.87   |
|              | 80       | 14.08        | 47.76                    | 9.55    | 19.10   |
|              | 90       | 15.84        | 50.66                    | 10.13   | 20.26   |
|              | 100      | 17.6         | 53.40                    | 10.68   | 21.36   |

### 1¼" PEX pipe expansion arm

PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.55         | 10.44                    | 2.09    | 4.17    |
|              | 60       | 0.66         | 11.43                    | 2.29    | 4.57    |
|              | 70       | 0.77         | 12.35                    | 2.47    | 4.94    |
|              | 80       | 0.88         | 13.20                    | 2.64    | 5.28    |
|              | 90       | 0.99         | 14.00                    | 2.80    | 5.60    |
|              | 100      | 1.1          | 14.76                    | 2.95    | 5.90    |
| 20           | 50       | 0.55         | 10.44                    | 2.09    | 4.17    |
|              | 60       | 0.66         | 11.43                    | 2.29    | 4.57    |
|              | 70       | 0.77         | 12.35                    | 2.47    | 4.94    |
|              | 80       | 0.88         | 13.20                    | 2.64    | 5.28    |
|              | 90       | 0.99         | 14.00                    | 2.80    | 5.60    |
|              | 100      | 1.1          | 14.76                    | 2.95    | 5.90    |
| 30           | 50       | 1.1          | 14.76                    | 2.95    | 5.90    |
|              | 60       | 1.32         | 16.17                    | 3.23    | 6.47    |
|              | 70       | 1.54         | 17.46                    | 3.49    | 6.98    |
|              | 80       | 1.76         | 18.67                    | 3.73    | 7.47    |
|              | 90       | 1.98         | 19.80                    | 3.96    | 7.92    |
|              | 100      | 2.2          | 20.87                    | 4.17    | 8.35    |
| 40           | 50       | 1.65         | 18.07                    | 3.61    | 7.23    |
|              | 60       | 1.98         | 19.80                    | 3.96    | 7.92    |
|              | 70       | 2.31         | 21.39                    | 4.28    | 8.55    |
|              | 80       | 2.64         | 22.86                    | 4.57    | 9.15    |
|              | 90       | 2.97         | 24.25                    | 4.85    | 9.70    |
|              | 100      | 3.3          | 25.56                    | 5.11    | 10.22   |

Table E-3: PEX pipe expansion arm calculations ½" to 3"



### 1¼" PEX pipe expansion arm

PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 50           | 50       | 2.2          | 20.87                    | 4.17    | 8.35    |
|              | 60       | 2.64         | 22.86                    | 4.57    | 9.15    |
|              | 70       | 3.08         | 24.69                    | 4.94    | 9.88    |
|              | 80       | 3.52         | 26.40                    | 5.28    | 10.56   |
|              | 90       | 3.96         | 28.00                    | 5.60    | 11.20   |
|              | 100      | 4.4          | 29.52                    | 5.90    | 11.81   |
| 60           | 50       | 2.75         | 23.33                    | 4.67    | 9.33    |
|              | 60       | 3.3          | 25.56                    | 5.11    | 10.22   |
|              | 70       | 3.85         | 27.61                    | 5.52    | 11.04   |
|              | 80       | 4.4          | 29.52                    | 5.90    | 11.81   |
|              | 90       | 4.95         | 31.31                    | 6.26    | 12.52   |
|              | 100      | 5.5          | 33.00                    | 6.60    | 13.20   |
| 70           | 50       | 3.85         | 27.61                    | 5.52    | 11.04   |
|              | 60       | 4.62         | 30.24                    | 6.05    | 12.10   |
|              | 70       | 5.39         | 32.67                    | 6.53    | 13.07   |
|              | 80       | 6.16         | 34.92                    | 6.98    | 13.97   |
|              | 90       | 6.93         | 37.04                    | 7.41    | 14.82   |
|              | 100      | 7.7          | 39.05                    | 7.81    | 15.62   |
| 80           | 50       | 4.4          | 29.52                    | 5.90    | 11.81   |
|              | 60       | 5.28         | 32.33                    | 6.47    | 12.93   |
|              | 70       | 6.16         | 34.92                    | 6.98    | 13.97   |
|              | 80       | 7.04         | 37.34                    | 7.47    | 14.93   |
|              | 90       | 7.92         | 39.60                    | 7.92    | 15.84   |
|              | 100      | 8.8          | 41.74                    | 8.35    | 16.70   |
| 90           | 50       | 4.95         | 31.31                    | 6.26    | 12.52   |
|              | 60       | 5.94         | 34.29                    | 6.86    | 13.72   |
|              | 70       | 6.93         | 37.04                    | 7.41    | 14.82   |
|              | 80       | 7.92         | 39.60                    | 7.92    | 15.84   |
|              | 90       | 8.91         | 42.00                    | 8.40    | 16.80   |
|              | 100      | 9.9          | 44.27                    | 8.85    | 17.71   |
| 100          | 50       | 5.5          | 33.00                    | 6.60    | 13.20   |
|              | 60       | 6.6          | 36.15                    | 7.23    | 14.46   |
|              | 70       | 7.7          | 39.05                    | 7.81    | 15.62   |
|              | 80       | 8.8          | 41.74                    | 8.35    | 16.70   |
|              | 90       | 9.9          | 44.27                    | 8.85    | 17.71   |
|              | 100      | 11           | 46.67                    | 9.33    | 18.67   |
| 110          | 50       | 6.05         | 34.61                    | 6.92    | 13.84   |
|              | 60       | 7.26         | 37.91                    | 7.58    | 15.17   |
|              | 70       | 8.47         | 40.95                    | 8.19    | 16.38   |
|              | 80       | 9.68         | 43.78                    | 8.76    | 17.51   |
|              | 90       | 10.89        | 46.44                    | 9.29    | 18.57   |
|              | 100      | 12.1         | 48.95                    | 9.79    | 19.58   |

### 1¼" PEX pipe expansion arm

PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 120          | 50       | 6.6          | 36.15                    | 7.23    | 14.46   |
|              | 60       | 7.92         | 39.60                    | 7.92    | 15.84   |
|              | 70       | 9.24         | 42.77                    | 8.55    | 17.11   |
|              | 80       | 10.56        | 45.73                    | 9.15    | 18.29   |
|              | 90       | 11.88        | 48.50                    | 9.70    | 19.40   |
|              | 100      | 13.2         | 51.12                    | 10.22   | 20.45   |
| 130          | 50       | 7.15         | 37.63                    | 7.53    | 15.05   |
|              | 60       | 8.58         | 41.22                    | 8.24    | 16.49   |
|              | 70       | 10.01        | 44.52                    | 8.90    | 17.81   |
|              | 80       | 11.44        | 47.59                    | 9.52    | 19.04   |
|              | 90       | 12.87        | 50.48                    | 10.10   | 20.19   |
|              | 100      | 14.3         | 53.21                    | 10.64   | 21.28   |
| 140          | 50       | 7.7          | 39.05                    | 7.81    | 15.62   |
|              | 60       | 9.24         | 42.77                    | 8.55    | 17.11   |
|              | 70       | 10.78        | 46.20                    | 9.24    | 18.48   |
|              | 80       | 12.32        | 49.39                    | 9.88    | 19.76   |
|              | 90       | 13.86        | 52.39                    | 10.48   | 20.95   |
|              | 100      | 15.4         | 55.22                    | 11.04   | 22.09   |
| 150          | 50       | 8.25         | 40.42                    | 8.08    | 16.17   |
|              | 60       | 9.9          | 44.27                    | 8.85    | 17.71   |
|              | 70       | 11.55        | 47.82                    | 9.56    | 19.13   |
|              | 80       | 13.2         | 51.12                    | 10.22   | 20.45   |
|              | 90       | 14.85        | 54.22                    | 10.84   | 21.69   |
|              | 100      | 16.5         | 57.16                    | 11.43   | 22.86   |
| 160          | 50       | 8.8          | 41.74                    | 8.35    | 16.70   |
|              | 60       | 10.56        | 45.73                    | 9.15    | 18.29   |
|              | 70       | 12.32        | 49.39                    | 9.88    | 19.76   |
|              | 80       | 14.08        | 52.80                    | 10.56   | 21.12   |
|              | 90       | 15.84        | 56.00                    | 11.20   | 22.40   |
|              | 100      | 17.6         | 59.03                    | 11.81   | 23.61   |

### 1½" PEX pipe expansion arm

PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.55         | 11.34                    | 2.27    | 4.54    |
|              | 60       | 0.66         | 12.43                    | 2.49    | 4.97    |
|              | 70       | 0.77         | 13.42                    | 2.68    | 5.37    |
|              | 80       | 0.88         | 14.35                    | 2.87    | 5.74    |
|              | 90       | 0.99         | 15.22                    | 3.04    | 6.09    |
|              | 100      | 1.1          | 16.04                    | 3.21    | 6.42    |

Table E-3: PEX pipe expansion arm calculations ½" to 3"

### 1½" PEX pipe expansion arm

PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 20           | 50       | 1.1          | 16.04                    | 3.21    | 6.42    |
|              | 60       | 1.32         | 17.57                    | 3.51    | 7.03    |
|              | 70       | 1.54         | 18.98                    | 3.80    | 7.59    |
|              | 80       | 1.76         | 20.29                    | 4.06    | 8.12    |
|              | 90       | 1.98         | 21.52                    | 4.30    | 8.61    |
|              | 100      | 2.2          | 22.69                    | 4.54    | 9.08    |
| 30           | 50       | 1.65         | 19.65                    | 3.93    | 7.86    |
|              | 60       | 1.98         | 21.52                    | 4.30    | 8.61    |
|              | 70       | 2.31         | 23.25                    | 4.65    | 9.30    |
|              | 80       | 2.64         | 24.85                    | 4.97    | 9.94    |
|              | 90       | 2.97         | 26.36                    | 5.27    | 10.54   |
|              | 100      | 3.3          | 27.79                    | 5.56    | 11.12   |
| 40           | 50       | 2.2          | 22.69                    | 4.54    | 9.08    |
|              | 60       | 2.64         | 24.85                    | 4.97    | 9.94    |
|              | 70       | 3.08         | 26.85                    | 5.37    | 10.74   |
|              | 80       | 3.52         | 28.70                    | 5.74    | 11.48   |
|              | 90       | 3.96         | 30.44                    | 6.09    | 12.18   |
|              | 100      | 4.4          | 32.09                    | 6.42    | 12.83   |
| 50           | 50       | 2.75         | 25.37                    | 5.07    | 10.15   |
|              | 60       | 3.3          | 27.79                    | 5.56    | 11.12   |
|              | 70       | 3.85         | 30.01                    | 6.00    | 12.01   |
|              | 80       | 4.4          | 32.09                    | 6.42    | 12.83   |
|              | 90       | 4.95         | 34.03                    | 6.81    | 13.61   |
|              | 100      | 5.5          | 35.87                    | 7.17    | 14.35   |
| 60           | 50       | 3.3          | 27.79                    | 5.56    | 11.12   |
|              | 60       | 3.96         | 30.44                    | 6.09    | 12.18   |
|              | 70       | 4.62         | 32.88                    | 6.58    | 13.15   |
|              | 80       | 5.28         | 35.15                    | 7.03    | 14.06   |
|              | 90       | 5.94         | 37.28                    | 7.46    | 14.91   |
|              | 100      | 6.6          | 39.30                    | 7.86    | 15.72   |
| 70           | 50       | 3.85         | 30.01                    | 6.00    | 12.01   |
|              | 60       | 4.62         | 32.88                    | 6.58    | 13.15   |
|              | 70       | 5.39         | 35.51                    | 7.10    | 14.21   |
|              | 80       | 6.16         | 37.97                    | 7.59    | 15.19   |
|              | 90       | 6.93         | 40.27                    | 8.05    | 16.11   |
|              | 100      | 7.7          | 42.45                    | 8.49    | 16.98   |
| 80           | 50       | 4.4          | 32.09                    | 6.42    | 12.83   |
|              | 60       | 5.28         | 35.15                    | 7.03    | 14.06   |
|              | 70       | 6.16         | 37.97                    | 7.59    | 15.19   |
|              | 80       | 7.04         | 40.59                    | 8.12    | 16.24   |
|              | 90       | 7.92         | 43.05                    | 8.61    | 17.22   |
|              | 100      | 8.8          | 45.38                    | 9.08    | 18.15   |

### 1½" PEX pipe expansion arm

PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 90           | 50       | 4.95         | 34.03                    | 6.81    | 13.61   |
|              | 60       | 5.94         | 37.28                    | 7.46    | 14.91   |
|              | 70       | 6.93         | 40.27                    | 8.05    | 16.11   |
|              | 80       | 7.92         | 43.05                    | 8.61    | 17.22   |
|              | 90       | 8.91         | 45.66                    | 9.13    | 18.26   |
|              | 100      | 9.9          | 48.13                    | 9.63    | 19.25   |
| 100          | 50       | 5.5          | 35.87                    | 7.17    | 14.35   |
|              | 60       | 6.6          | 39.30                    | 7.86    | 15.72   |
|              | 70       | 7.7          | 42.45                    | 8.49    | 16.98   |
|              | 80       | 8.8          | 45.38                    | 9.08    | 18.15   |
|              | 90       | 9.9          | 48.13                    | 9.63    | 19.25   |
|              | 100      | 11           | 50.73                    | 10.15   | 20.29   |
| 110          | 50       | 6.05         | 37.63                    | 7.53    | 15.05   |
|              | 60       | 7.26         | 41.22                    | 8.24    | 16.49   |
|              | 70       | 8.47         | 44.52                    | 8.90    | 17.81   |
|              | 80       | 9.68         | 47.59                    | 9.52    | 19.04   |
|              | 90       | 10.89        | 50.48                    | 10.10   | 20.19   |
|              | 100      | 12.1         | 53.21                    | 10.64   | 21.28   |
| 120          | 50       | 6.6          | 39.30                    | 7.86    | 15.72   |
|              | 60       | 7.92         | 43.05                    | 8.61    | 17.22   |
|              | 70       | 9.24         | 46.50                    | 9.30    | 18.60   |
|              | 80       | 10.56        | 49.71                    | 9.94    | 19.88   |
|              | 90       | 11.88        | 52.72                    | 10.54   | 21.09   |
|              | 100      | 13.2         | 55.58                    | 11.12   | 22.23   |
| 130          | 50       | 7.15         | 40.90                    | 8.18    | 16.36   |
|              | 60       | 8.58         | 44.81                    | 8.96    | 17.92   |
|              | 70       | 10.01        | 48.40                    | 9.68    | 19.36   |
|              | 80       | 11.44        | 51.74                    | 10.35   | 20.70   |
|              | 90       | 12.87        | 54.88                    | 10.98   | 21.95   |
|              | 100      | 14.3         | 57.85                    | 11.57   | 23.14   |
| 140          | 50       | 7.7          | 42.45                    | 8.49    | 16.98   |
|              | 60       | 9.24         | 46.50                    | 9.30    | 18.60   |
|              | 70       | 10.78        | 50.22                    | 10.04   | 20.09   |
|              | 80       | 12.32        | 53.69                    | 10.74   | 21.48   |
|              | 90       | 13.86        | 56.95                    | 11.39   | 22.78   |
|              | 100      | 15.4         | 60.03                    | 12.01   | 24.01   |
| 150          | 50       | 8.25         | 43.94                    | 8.79    | 17.57   |
|              | 60       | 9.9          | 48.13                    | 9.63    | 19.25   |
|              | 70       | 11.55        | 51.99                    | 10.40   | 20.79   |
|              | 80       | 13.2         | 55.58                    | 11.12   | 22.23   |
|              | 90       | 14.85        | 58.95                    | 11.79   | 23.58   |
|              | 100      | 16.5         | 62.14                    | 12.43   | 24.85   |

Table E-3: PEX pipe expansion arm calculations ½" to 3"

### 1½" PEX pipe expansion arm

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 160          | 50       | 8.8          | 45.38                    | 9.08    | 18.15   |
|              | 60       | 10.56        | 49.71                    | 9.94    | 19.88   |
|              | 70       | 12.32        | 53.69                    | 10.74   | 21.48   |
|              | 80       | 14.08        | 57.40                    | 11.48   | 22.96   |
|              | 90       | 15.84        | 60.88                    | 12.18   | 24.35   |
|              | 100      | 17.6         | 64.17                    | 12.83   | 25.67   |

### 2" PEX pipe expansion arm

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 10           | 50       | 0.55         | 12.97                    | 2.59    | 5.19    |
|              | 60       | 0.66         | 14.21                    | 2.84    | 5.68    |
|              | 70       | 0.77         | 15.35                    | 3.07    | 6.14    |
|              | 80       | 0.88         | 16.41                    | 3.28    | 6.56    |
|              | 90       | 0.99         | 17.41                    | 3.48    | 6.96    |
|              | 100      | 1.1          | 18.35                    | 3.67    | 7.34    |
| 20           | 50       | 1.1          | 18.35                    | 3.67    | 7.34    |
|              | 60       | 1.32         | 20.10                    | 4.02    | 8.04    |
|              | 70       | 1.54         | 21.71                    | 4.34    | 8.68    |
|              | 80       | 1.76         | 23.21                    | 4.64    | 9.28    |
|              | 90       | 1.98         | 24.61                    | 4.92    | 9.85    |
|              | 100      | 2.2          | 25.95                    | 5.19    | 10.38   |
| 30           | 50       | 1.65         | 22.47                    | 4.49    | 8.99    |
|              | 60       | 1.98         | 24.61                    | 4.92    | 9.85    |
|              | 70       | 2.31         | 26.59                    | 5.32    | 10.63   |
|              | 80       | 2.64         | 28.42                    | 5.68    | 11.37   |
|              | 90       | 2.97         | 30.15                    | 6.03    | 12.06   |
|              | 100      | 3.3          | 31.78                    | 6.36    | 12.71   |
| 40           | 50       | 2.2          | 25.95                    | 5.19    | 10.38   |
|              | 60       | 2.64         | 28.42                    | 5.68    | 11.37   |
|              | 70       | 3.08         | 30.70                    | 6.14    | 12.28   |
|              | 80       | 3.52         | 32.82                    | 6.56    | 13.13   |
|              | 90       | 3.96         | 34.81                    | 6.96    | 13.92   |
|              | 100      | 4.4          | 36.69                    | 7.34    | 14.68   |
| 50           | 50       | 2.75         | 29.01                    | 5.80    | 11.60   |
|              | 60       | 3.3          | 31.78                    | 6.36    | 12.71   |
|              | 70       | 3.85         | 34.32                    | 6.86    | 13.73   |
|              | 80       | 4.4          | 36.69                    | 7.34    | 14.68   |
|              | 90       | 4.95         | 38.92                    | 7.78    | 15.57   |
|              | 100      | 5.5          | 41.02                    | 8.20    | 16.41   |

### 2" PEX pipe expansion arm

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 60           | 50       | 3.3          | 31.78                    | 6.36    | 12.71   |
|              | 60       | 3.96         | 34.81                    | 6.96    | 13.92   |
|              | 70       | 4.62         | 37.60                    | 7.52    | 15.04   |
|              | 80       | 5.28         | 40.20                    | 8.04    | 16.08   |
|              | 90       | 5.94         | 42.63                    | 8.53    | 17.05   |
|              | 100      | 6.6          | 44.94                    | 8.99    | 17.98   |
| 70           | 50       | 3.85         | 34.32                    | 6.86    | 13.73   |
|              | 60       | 4.62         | 37.60                    | 7.52    | 15.04   |
|              | 70       | 5.39         | 40.61                    | 8.12    | 16.24   |
|              | 80       | 6.16         | 43.42                    | 8.68    | 17.37   |
|              | 90       | 6.93         | 46.05                    | 9.21    | 18.42   |
|              | 100      | 7.7          | 48.54                    | 9.71    | 19.42   |
| 80           | 50       | 4.4          | 36.69                    | 7.34    | 14.68   |
|              | 60       | 5.28         | 40.20                    | 8.04    | 16.08   |
|              | 70       | 6.16         | 43.42                    | 8.68    | 17.37   |
|              | 80       | 7.04         | 46.41                    | 9.28    | 18.57   |
|              | 90       | 7.92         | 49.23                    | 9.85    | 19.69   |
|              | 100      | 8.8          | 51.89                    | 10.38   | 20.76   |
| 90           | 50       | 4.95         | 38.92                    | 7.78    | 15.57   |
|              | 60       | 5.94         | 42.63                    | 8.53    | 17.05   |
|              | 70       | 6.93         | 46.05                    | 9.21    | 18.42   |
|              | 80       | 7.92         | 49.23                    | 9.85    | 19.69   |
|              | 90       | 8.91         | 52.22                    | 10.44   | 20.89   |
|              | 100      | 9.9          | 55.04                    | 11.01   | 22.02   |
| 100          | 50       | 5.5          | 41.02                    | 8.20    | 16.41   |
|              | 60       | 6.6          | 44.94                    | 8.99    | 17.98   |
|              | 70       | 7.7          | 48.54                    | 9.71    | 19.42   |
|              | 80       | 8.8          | 51.89                    | 10.38   | 20.76   |
|              | 90       | 9.9          | 55.04                    | 11.01   | 22.02   |
|              | 100      | 11           | 58.02                    | 11.60   | 23.21   |
| 110          | 50       | 6.05         | 43.03                    | 8.61    | 17.21   |
|              | 60       | 7.26         | 47.13                    | 9.43    | 18.85   |
|              | 70       | 8.47         | 50.91                    | 10.18   | 20.36   |
|              | 80       | 9.68         | 54.42                    | 10.88   | 21.77   |
|              | 90       | 10.89        | 57.73                    | 11.55   | 23.09   |
|              | 100      | 12.1         | 60.85                    | 12.17   | 24.34   |
| 120          | 50       | 6.6          | 44.94                    | 8.99    | 17.98   |
|              | 60       | 7.92         | 49.23                    | 9.85    | 19.69   |
|              | 70       | 9.24         | 53.17                    | 10.63   | 21.27   |
|              | 80       | 10.56        | 56.85                    | 11.37   | 22.74   |
|              | 90       | 11.88        | 60.29                    | 12.06   | 24.12   |
|              | 100      | 13.2         | 63.55                    | 12.71   | 25.42   |

PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m).

Table E-3: PEX pipe expansion arm calculations ½" to 3"

### 2" PEX pipe expansion arm

| PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m). | Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |       |
|--|--------------|----------|--------------|--------------------------|---------|---------|-------|
|  | 130          | 50       | 50           | 7.15                     | 46.77   | 9.35    | 18.71 |
|  |              | 60       | 60           | 8.58                     | 51.24   | 10.25   | 20.50 |
|  |              | 70       | 70           | 10.01                    | 55.34   | 11.07   | 22.14 |
|  |              | 80       | 80           | 11.44                    | 59.17   | 11.83   | 23.67 |
|  |              | 90       | 90           | 12.87                    | 62.76   | 12.55   | 25.10 |
|  | 140          | 50       | 50           | 7.7                      | 48.54   | 9.71    | 19.42 |
|  |              | 60       | 60           | 9.24                     | 53.17   | 10.63   | 21.27 |
|  |              | 70       | 70           | 10.78                    | 57.43   | 11.49   | 22.97 |
|  |              | 80       | 80           | 12.32                    | 61.40   | 12.28   | 24.56 |
| 90   |              | 90       | 13.86        | 65.12                    | 13.02   | 26.05   |       |
| 150  | 50           | 50       | 8.25         | 50.24                    | 10.05   | 20.10   |       |
|  | 60           | 60       | 9.9          | 55.04                    | 11.01   | 22.02   |       |
|  | 70           | 70       | 11.55        | 59.45                    | 11.89   | 23.78   |       |
|  | 80           | 80       | 13.2         | 63.55                    | 12.71   | 25.42   |       |
|  | 90           | 90       | 14.85        | 67.41                    | 13.48   | 26.96   |       |
| 160  | 50           | 50       | 8.8          | 51.89                    | 10.38   | 20.76   |       |
|  | 60           | 60       | 10.56        | 56.85                    | 11.37   | 22.74   |       |
|  | 70           | 70       | 12.32        | 61.40                    | 12.28   | 24.56   |       |
|  | 80           | 80       | 14.08        | 65.64                    | 13.13   | 26.26   |       |
|  | 90           | 90       | 15.84        | 69.62                    | 13.92   | 27.85   |       |
| 100  | 100          | 17.6     | 73.39        | 14.68                    | 29.35   |         |       |

Table E-3: PEX pipe expansion arm calculations ½" to 3"

### 2½" PEX pipe expansion arm

| PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m). | Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |      |
|--|--------------|----------|--------------|--------------------------|---------|---------|------|
|  | 10           | 50       | 50           | 0.55                     | 14.42   | 2.88    | 5.77 |
|  |              | 60       | 60           | 0.66                     | 15.79   | 3.16    | 6.32 |
|  |              | 70       | 70           | 0.77                     | 17.06   | 3.41    | 6.82 |
|  |              | 80       | 80           | 0.88                     | 18.24   | 3.65    | 7.30 |
|  |              | 90       | 90           | 0.99                     | 19.34   | 3.87    | 7.74 |
|  |              | 100      | 100          | 1.1                      | 20.39   | 4.08    | 8.16 |
|  | 20           | 50       | 50           | 1.1                      | 20.39   | 4.08    | 8.16 |
|  |              | 60       | 60           | 1.32                     | 22.34   | 4.47    | 8.93 |
|  |              | 70       | 70           | 1.54                     | 24.13   | 4.83    | 9.65 |
| 80   |              | 80       | 1.76         | 25.79                    | 5.16    | 10.32   |      |
| 90   |              | 90       | 1.98         | 27.36                    | 5.47    | 10.94   |      |
| 100  |              | 100      | 2.2          | 28.84                    | 5.77    | 11.53   |      |

Table E-3: PEX pipe expansion arm calculations ½" to 3"

### 2½" PEX pipe expansion arm

| PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m). | Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |       |
|--|--------------|----------|--------------|--------------------------|---------|---------|-------|
|  | 30           | 50       | 50           | 1.65                     | 24.97   | 4.99    | 9.99  |
|  |              | 60       | 60           | 1.98                     | 27.36   | 5.47    | 10.94 |
|  |              | 70       | 70           | 2.31                     | 29.55   | 5.91    | 11.82 |
|  |              | 80       | 80           | 2.64                     | 31.59   | 6.32    | 12.64 |
|  |              | 90       | 90           | 2.97                     | 33.51   | 6.70    | 13.40 |
|  | 40           | 50       | 50           | 2.2                      | 28.84   | 5.77    | 11.53 |
|  |              | 60       | 60           | 2.64                     | 31.59   | 6.32    | 12.64 |
|  |              | 70       | 70           | 3.08                     | 34.12   | 6.82    | 13.65 |
|  |              | 80       | 80           | 3.52                     | 36.48   | 7.30    | 14.59 |
| 90   |              | 90       | 3.96         | 38.69                    | 7.74    | 15.48   |       |
| 50   | 50           | 50       | 4.4          | 40.78                    | 8.16    | 16.31   |       |
|  | 60           | 60       | 5.5          | 45.60                    | 9.12    | 18.24   |       |
|  | 70           | 70       | 6.6          | 49.95                    | 9.99    | 19.98   |       |
|  | 80           | 80       | 7.7          | 53.95                    | 10.79   | 21.58   |       |
|  | 90           | 90       | 8.8          | 57.67                    | 11.53   | 23.07   |       |
| 60   | 50           | 50       | 2.75         | 32.24                    | 6.45    | 12.90   |       |
|  | 60           | 60       | 3.3          | 35.32                    | 7.06    | 14.13   |       |
|  | 70           | 70       | 3.85         | 38.15                    | 7.63    | 15.26   |       |
|  | 80           | 80       | 4.4          | 40.78                    | 8.16    | 16.31   |       |
|  | 90           | 90       | 4.95         | 43.26                    | 8.65    | 17.30   |       |
| 70   | 50           | 50       | 3.3          | 35.32                    | 7.06    | 14.13   |       |
|  | 60           | 60       | 3.96         | 38.69                    | 7.74    | 15.48   |       |
|  | 70           | 70       | 4.62         | 41.79                    | 8.36    | 16.72   |       |
|  | 80           | 80       | 5.28         | 44.67                    | 8.93    | 17.87   |       |
|  | 90           | 90       | 5.94         | 47.38                    | 9.48    | 18.95   |       |
| 80   | 50           | 50       | 3.85         | 38.15                    | 7.63    | 15.26   |       |
|  | 60           | 60       | 4.62         | 41.79                    | 8.36    | 16.72   |       |
|  | 70           | 70       | 5.39         | 45.14                    | 9.03    | 18.06   |       |
|  | 80           | 80       | 6.16         | 48.25                    | 9.65    | 19.30   |       |
|  | 90           | 90       | 6.93         | 51.18                    | 10.24   | 20.47   |       |
| 90   | 50           | 50       | 4.4          | 40.78                    | 8.16    | 16.31   |       |
|  | 60           | 60       | 5.28         | 44.67                    | 8.93    | 17.87   |       |
|  | 70           | 70       | 6.16         | 48.25                    | 9.65    | 19.30   |       |
|  | 80           | 80       | 7.04         | 51.59                    | 10.32   | 20.63   |       |
|  | 90           | 90       | 7.92         | 54.72                    | 10.94   | 21.89   |       |
| 100  | 50           | 50       | 4.95         | 43.26                    | 8.65    | 17.30   |       |
|  | 60           | 60       | 5.94         | 47.38                    | 9.48    | 18.95   |       |
|  | 70           | 70       | 6.93         | 51.18                    | 10.24   | 20.47   |       |
|  | 80           | 80       | 7.92         | 54.72                    | 10.94   | 21.89   |       |
|  | 90           | 90       | 8.91         | 58.03                    | 11.61   | 23.21   |       |
| 100  | 100          | 9.9      | 61.17        | 12.23                    | 24.47   |         |       |

### 2½" PEX pipe expansion arm

| PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m). | Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |       |
|--|--------------|----------|--------------|--------------------------|---------|---------|-------|
|  | 100          | 50       | 50           | 5.5                      | 45.60   | 9.12    | 18.24 |
|  |              | 60       | 60           | 6.6                      | 49.95   | 9.99    | 19.98 |
|  |              | 70       | 70           | 7.7                      | 53.95   | 10.79   | 21.58 |
|  |              | 80       | 80           | 8.8                      | 57.67   | 11.53   | 23.07 |
|  |              | 90       | 90           | 9.9                      | 61.17   | 12.23   | 24.47 |
|  | 100          | 100      | 11           | 64.48                    | 12.90   | 25.79   |       |
|  | 110          | 50       | 50           | 6.05                     | 47.82   | 9.56    | 19.13 |
|  |              | 60       | 60           | 7.26                     | 52.39   | 10.48   | 20.95 |
|  |              | 70       | 70           | 8.47                     | 56.58   | 11.32   | 22.63 |
| 80   |              | 80       | 9.68         | 60.49                    | 12.10   | 24.20   |       |
| 90   |              | 90       | 10.89        | 64.16                    | 12.83   | 25.66   |       |
| 100  | 100          | 12.1     | 67.63        | 13.53                    | 27.05   |         |       |
| 120  | 50           | 50       | 6.6          | 49.95                    | 9.99    | 19.98   |       |
|  | 60           | 60       | 7.92         | 54.72                    | 10.94   | 21.89   |       |
|  | 70           | 70       | 9.24         | 59.10                    | 11.82   | 23.64   |       |
|  | 80           | 80       | 10.56        | 63.18                    | 12.64   | 25.27   |       |
|  | 90           | 90       | 11.88        | 67.01                    | 13.40   | 26.80   |       |
| 100  | 100          | 13.2     | 70.64        | 14.13                    | 28.25   |         |       |
| 130  | 50           | 50       | 7.15         | 51.99                    | 10.40   | 20.79   |       |
|  | 60           | 60       | 8.58         | 56.95                    | 11.39   | 22.78   |       |
|  | 70           | 70       | 10.01        | 61.51                    | 12.30   | 24.60   |       |
|  | 80           | 80       | 11.44        | 65.76                    | 13.15   | 26.30   |       |
|  | 90           | 90       | 12.87        | 69.75                    | 13.95   | 27.90   |       |
| 100  | 100          | 14.3     | 73.52        | 14.70                    | 29.41   |         |       |
| 140  | 50           | 50       | 7.7          | 53.95                    | 10.79   | 21.58   |       |
|  | 60           | 60       | 9.24         | 59.10                    | 11.82   | 23.64   |       |
|  | 70           | 70       | 10.78        | 63.83                    | 12.77   | 25.53   |       |
|  | 80           | 80       | 12.32        | 68.24                    | 13.65   | 27.30   |       |
|  | 90           | 90       | 13.86        | 72.38                    | 14.48   | 28.95   |       |
| 100  | 100          | 15.4     | 76.30        | 15.26                    | 30.52   |         |       |
| 150  | 50           | 50       | 8.25         | 55.84                    | 11.17   | 22.34   |       |
|  | 60           | 60       | 9.9          | 61.17                    | 12.23   | 24.47   |       |
|  | 70           | 70       | 11.55        | 66.07                    | 13.21   | 26.43   |       |
|  | 80           | 80       | 13.2         | 70.64                    | 14.13   | 28.25   |       |
|  | 90           | 90       | 14.85        | 74.92                    | 14.98   | 29.97   |       |
| 100  | 100          | 16.5     | 78.97        | 15.79                    | 31.59   |         |       |
| 160  | 50           | 50       | 8.8          | 57.67                    | 11.53   | 23.07   |       |
|  | 60           | 60       | 10.56        | 63.18                    | 12.64   | 25.27   |       |
|  | 70           | 70       | 12.32        | 68.24                    | 13.65   | 27.30   |       |
|  | 80           | 80       | 14.08        | 72.95                    | 14.59   | 29.18   |       |
|  | 90           | 90       | 15.84        | 77.38                    | 15.48   | 30.95   |       |
| 100  | 100          | 17.6     | 81.56        | 16.31                    | 32.63   |         |       |

### 3" PEX pipe expansion arm

| PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m). | Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |       |
|--|--------------|----------|--------------|--------------------------|---------|---------|-------|
|  | 10           | 50       | 50           | 0.55                     | 15.73   | 3.15    | 6.29  |
|  |              | 60       | 60           | 0.66                     | 17.23   | 3.45    | 6.89  |
|  |              | 70       | 70           | 0.77                     | 18.61   | 3.72    | 7.45  |
|  |              | 80       | 80           | 0.88                     | 19.90   | 3.98    | 7.96  |
|  |              | 90       | 90           | 0.99                     | 21.11   | 4.22    | 8.44  |
|  | 100          | 100      | 1.1          | 22.25                    | 4.45    | 8.90    |       |
|  | 20           | 50       | 50           | 1.1                      | 22.25   | 4.45    | 8.90  |
|  |              | 60       | 60           | 1.32                     | 24.37   | 4.87    | 9.75  |
|  |              | 70       | 70           | 1.54                     | 26.32   | 5.26    | 10.53 |
| 80   |              | 80       | 1.76         | 28.14                    | 5.63    | 11.26   |       |
| 90   |              | 90       | 1.98         | 29.85                    | 5.97    | 11.94   |       |
| 100  | 100          | 2.2      | 31.46        | 6.29                     | 12.59   |         |       |
| 30   | 50           | 50       | 1.65         | 27.25                    | 5.45    | 10.90   |       |
|  | 60           | 60       | 1.98         | 29.85                    | 5.97    | 11.94   |       |
|  | 70           | 70       | 2.31         | 32.24                    | 6.45    | 12.90   |       |
|  | 80           | 80       | 2.64         | 34.47                    | 6.89    | 13.79   |       |
|  | 90           | 90       | 2.97         | 36.56                    | 7.31    | 14.62   |       |
| 100  | 100          | 3.3      | 38.54        | 7.71                     | 15.41   |         |       |
| 40   | 50           | 50       | 2.2          | 31.46                    | 6.29    | 12.59   |       |
|  | 60           | 60       | 2.64         | 34.47                    | 6.89    | 13.79   |       |
|  | 70           | 70       | 3.08         | 37.23                    | 7.45    | 14.89   |       |
|  | 80           | 80       | 3.52         | 39.80                    | 7.96    | 15.92   |       |
|  | 90           | 90       | 3.96         | 42.21                    | 8.44    | 16.89   |       |
| 100  | 100          | 4.4      | 44.50        | 8.90                     | 17.80   |         |       |
| 50   | 50           | 50       | 2.75         | 35.18                    | 7.04    | 14.07   |       |
|  | 60           | 60       | 3.3          | 38.54                    | 7.71    | 15.41   |       |
|  | 70           | 70       | 3.85         | 41.62                    | 8.32    | 16.65   |       |
|  | 80           | 80       | 4.4          | 44.50                    | 8.90    | 17.80   |       |
|  | 90           | 90       | 4.95         | 47.20                    | 9.44    | 18.88   |       |
| 100  | 100          | 5.5      | 49.75        | 9.95                     | 19.90   |         |       |
| 60   | 50           | 50       | 3.3          | 38.54                    | 7.71    | 15.41   |       |
|  | 60           | 60       | 3.96         | 42.21                    | 8.44    | 16.89   |       |
|  | 70           | 70       | 4.62         | 45.60                    | 9.12    | 18.24   |       |
|  | 80           | 80       | 5.28         | 48.74                    | 9.75    | 19.50   |       |
|  | 90           | 90       | 5.94         | 51.70                    | 10.34   | 20.68   |       |
| 100  | 100          | 6.6      | 54.50        | 10.90                    | 21.80   |         |       |
| 70   | 50           | 50       | 3.85         | 41.62                    | 8.32    | 16.65   |       |
|  | 60           | 60       | 4.62         | 45.60                    | 9.12    | 18.24   |       |
|  | 70           | 70       | 5.39         | 49.25                    | 9.85    | 19.70   |       |
|  | 80           | 80       | 6.16         | 52.65                    | 10.53   | 21.06   |       |
|  | 90           | 90       | 6.93         | 55.84                    | 11.17   | 22.34   |       |
| 100  | 100          | 7.7      | 58.86        | 11.77                    | 23.55   |         |       |

Table E-3: PEX pipe expansion arm calculations ½" to 3"

### 3" PEX pipe expansion arm

PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 80           | 50       | 4.4          | 44.50                    | 8.90    | 17.80   |
|              | 60       | 5.28         | 48.74                    | 9.75    | 19.50   |
|              | 70       | 6.16         | 52.65                    | 10.53   | 21.06   |
|              | 80       | 7.04         | 56.28                    | 11.26   | 22.51   |
|              | 90       | 7.92         | 59.70                    | 11.94   | 23.88   |
|              | 100      | 8.8          | 62.93                    | 12.59   | 25.17   |
| 90           | 50       | 4.95         | 47.20                    | 9.44    | 18.88   |
|              | 60       | 5.94         | 51.70                    | 10.34   | 20.68   |
|              | 70       | 6.93         | 55.84                    | 11.17   | 22.34   |
|              | 80       | 7.92         | 59.70                    | 11.94   | 23.88   |
|              | 90       | 8.91         | 63.32                    | 12.66   | 25.33   |
|              | 100      | 9.9          | 66.75                    | 13.35   | 26.70   |
| 100          | 50       | 5.5          | 49.75                    | 9.95    | 19.90   |
|              | 60       | 6.6          | 54.50                    | 10.90   | 21.80   |
|              | 70       | 7.7          | 58.86                    | 11.77   | 23.55   |
|              | 80       | 8.8          | 62.93                    | 12.59   | 25.17   |
|              | 90       | 9.9          | 66.75                    | 13.35   | 26.70   |
|              | 100      | 11           | 70.36                    | 14.07   | 28.14   |
| 110          | 50       | 6.05         | 52.18                    | 10.44   | 20.87   |
|              | 60       | 7.26         | 57.16                    | 11.43   | 22.86   |
|              | 70       | 8.47         | 61.74                    | 12.35   | 24.69   |
|              | 80       | 9.68         | 66.00                    | 13.20   | 26.40   |
|              | 90       | 10.89        | 70.00                    | 14.00   | 28.00   |
|              | 100      | 12.1         | 73.79                    | 14.76   | 29.52   |
| 120          | 50       | 6.6          | 54.50                    | 10.90   | 21.80   |
|              | 60       | 7.92         | 59.70                    | 11.94   | 23.88   |
|              | 70       | 9.24         | 64.48                    | 12.90   | 25.79   |
|              | 80       | 10.56        | 68.93                    | 13.79   | 27.57   |
|              | 90       | 11.88        | 73.12                    | 14.62   | 29.25   |
|              | 100      | 13.2         | 77.07                    | 15.41   | 30.83   |
| 130          | 50       | 7.15         | 56.72                    | 11.34   | 22.69   |
|              | 60       | 8.58         | 62.14                    | 12.43   | 24.85   |
|              | 70       | 10.01        | 67.12                    | 13.42   | 26.85   |
|              | 80       | 11.44        | 71.75                    | 14.35   | 28.70   |
|              | 90       | 12.87        | 76.10                    | 15.22   | 30.44   |
|              | 100      | 14.3         | 80.22                    | 16.04   | 32.09   |
| 140          | 50       | 7.7          | 58.86                    | 11.77   | 23.55   |
|              | 60       | 9.24         | 64.48                    | 12.90   | 25.79   |
|              | 70       | 10.78        | 69.65                    | 13.93   | 27.86   |
|              | 80       | 12.32        | 74.46                    | 14.89   | 29.78   |
|              | 90       | 13.86        | 78.97                    | 15.79   | 31.59   |
|              | 100      | 15.4         | 83.25                    | 16.65   | 33.30   |

### 3" PEX pipe expansion arm

PEX has a free-body thermal expansion rate of 1.1"/10°F ΔT/100 ft. (27.94mm/5.56°C ΔT/30.48m).

| Delta T (ΔT) | Run (ft) | Delta L (in) | Flexible arm length (in) | L1 (in) | L2 (in) |
|--------------|----------|--------------|--------------------------|---------|---------|
| 150          | 50       | 8.25         | 60.93                    | 12.19   | 24.37   |
|              | 60       | 9.9          | 66.75                    | 13.35   | 26.70   |
|              | 70       | 11.55        | 72.09                    | 14.42   | 28.84   |
|              | 80       | 13.2         | 77.07                    | 15.41   | 30.83   |
|              | 90       | 14.85        | 81.75                    | 16.35   | 32.70   |
|              | 100      | 16.5         | 86.17                    | 17.23   | 34.47   |
| 160          | 50       | 8.8          | 62.93                    | 12.59   | 25.17   |
|              | 60       | 10.56        | 68.93                    | 13.79   | 27.57   |
|              | 70       | 12.32        | 74.46                    | 14.89   | 29.78   |
|              | 80       | 14.08        | 79.60                    | 15.92   | 31.84   |
|              | 90       | 15.84        | 84.43                    | 16.89   | 33.77   |
|              | 100      | 17.6         | 88.99                    | 17.80   | 35.60   |

Table E-3: PEX pipe expansion arm calculations ½" to 3"

## Appendix F:

### Pipe heat loss and surface temperature

**½" Uponor PEX heat loss  
at 50°F/10°C ambient**

| Water temp (°F) | Heat loss (btu/hr-ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -3.2                  | -2.0          | -1.6          | -1.4           | -1.2          |
| 40              | -1.6                  | -1.0          | -0.8          | -0.7           | -0.6          |
| 50              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 60              | 1.6                   | 1.0           | 0.8           | 0.7            | 0.6           |
| 70              | 3.2                   | 2.0           | 1.6           | 1.4            | 1.2           |
| 80              | 4.7                   | 3.0           | 2.4           | 2.0            | 1.8           |
| 90              | 6.3                   | 4.1           | 3.2           | 2.7            | 2.4           |
| 100             | 7.9                   | 5.1           | 4.0           | 3.4            | 3.1           |
| 110             | 9.5                   | 6.1           | 4.7           | 4.1            | 3.7           |
| 120             | 11.1                  | 7.1           | 5.5           | 4.8            | 4.3           |
| 130             | 12.6                  | 8.1           | 6.3           | 5.4            | 4.9           |
| 140             | 14.2                  | 9.1           | 7.1           | 6.1            | 5.5           |
| 150             | 15.8                  | 10.1          | 7.9           | 6.8            | 6.1           |
| 160             | 17.4                  | 11.1          | 8.7           | 7.5            | 6.7           |
| 170             | 18.9                  | 12.2          | 9.5           | 8.2            | 7.3           |
| 180             | 20.5                  | 13.2          | 10.3          | 8.8            | 8.0           |
| 190             | 22.1                  | 14.2          | 11.1          | 9.5            | 8.6           |
| 200             | 23.7                  | 15.2          | 11.9          | 10.2           | 9.2           |

**½" Uponor PEX surface  
temperature at 50°F/10°C ambient**

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 30.7                     | 45.2          | 47.7          | 48.6           | 49.0          |
| 40              | 40.4                     | 47.6          | 48.8          | 49.3           | 49.5          |
| 50              | 50.0                     | 50.0          | 50.0          | 50.0           | 50.0          |
| 60              | 59.6                     | 52.4          | 51.2          | 50.7           | 50.5          |
| 70              | 69.3                     | 54.8          | 52.3          | 51.4           | 51.0          |
| 80              | 78.9                     | 57.1          | 53.5          | 52.1           | 51.5          |
| 90              | 88.6                     | 59.5          | 54.6          | 52.9           | 52.0          |
| 100             | 98.2                     | 61.9          | 55.8          | 53.6           | 52.5          |
| 110             | 107.9                    | 64.3          | 56.9          | 54.3           | 53.0          |
| 120             | 117.5                    | 66.7          | 58.1          | 55.0           | 53.5          |
| 130             | 127.2                    | 69.0          | 59.2          | 55.7           | 54.0          |
| 140             | 136.8                    | 71.4          | 60.4          | 56.4           | 54.5          |
| 150             | 146.5                    | 73.8          | 61.5          | 57.2           | 55.1          |
| 160             | 156.1                    | 76.2          | 62.7          | 57.9           | 55.6          |
| 170             | 165.8                    | 78.6          | 63.8          | 58.6           | 56.1          |
| 180             | 175.4                    | 81.0          | 65.0          | 59.3           | 56.6          |
| 190             | 185.1                    | 83.3          | 66.1          | 60.0           | 57.1          |
| 200             | 194.7                    | 85.7          | 67.3          | 60.7           | 57.6          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr•ft²•°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu•in/(hr•ft²•°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## ¾" Uponor PEX heat loss at 50°F/10°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -4.4                  | -2.5          | -1.9          | -1.6           | -1.4          |
| 40              | -2.2                  | -1.2          | -0.9          | -0.8           | -0.7          |
| 50              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 60              | 2.2                   | 1.2           | 0.9           | 0.8            | 0.7           |
| 70              | 4.4                   | 2.5           | 1.9           | 1.6            | 1.4           |
| 80              | 6.6                   | 3.7           | 2.8           | 2.4            | 2.1           |
| 90              | 8.7                   | 5.0           | 3.8           | 3.2            | 2.8           |
| 100             | 10.9                  | 6.2           | 4.7           | 4.0            | 3.5           |
| 110             | 13.1                  | 7.4           | 5.6           | 4.8            | 4.3           |
| 120             | 15.3                  | 8.7           | 6.6           | 5.6            | 5.0           |
| 130             | 17.5                  | 9.9           | 7.5           | 6.4            | 5.7           |
| 140             | 19.7                  | 11.2          | 8.5           | 7.2            | 6.4           |
| 150             | 21.9                  | 12.4          | 9.4           | 8.0            | 7.1           |
| 160             | 24.0                  | 13.6          | 10.4          | 8.8            | 7.8           |
| 170             | 26.2                  | 14.9          | 11.3          | 9.6            | 8.5           |
| 180             | 28.4                  | 16.1          | 12.2          | 10.3           | 9.2           |
| 190             | 30.6                  | 17.4          | 13.2          | 11.1           | 9.9           |
| 200             | 32.8                  | 18.6          | 14.1          | 11.9           | 10.6          |

## ¾" Uponor PEX surface temperature at 50°F/10°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 30.9                     | 45.0          | 47.5          | 48.4           | 48.9          |
| 40              | 40.5                     | 47.5          | 48.7          | 49.2           | 49.4          |
| 50              | 50.0                     | 50.0          | 50.0          | 50.0           | 50.0          |
| 60              | 59.5                     | 52.5          | 51.3          | 50.8           | 50.6          |
| 70              | 69.1                     | 55.0          | 52.5          | 51.6           | 51.1          |
| 80              | 78.6                     | 57.6          | 53.8          | 52.4           | 51.7          |
| 90              | 88.2                     | 60.1          | 55.0          | 53.1           | 52.2          |
| 100             | 97.7                     | 62.6          | 56.3          | 53.9           | 52.8          |
| 110             | 107.3                    | 65.1          | 57.5          | 54.7           | 53.3          |
| 120             | 116.8                    | 67.7          | 58.8          | 55.5           | 53.9          |
| 130             | 126.3                    | 70.2          | 60.0          | 56.3           | 54.4          |
| 140             | 135.9                    | 72.7          | 61.3          | 57.1           | 55.0          |
| 150             | 145.4                    | 75.2          | 62.5          | 57.8           | 55.6          |
| 160             | 155.0                    | 77.8          | 63.8          | 58.6           | 56.1          |
| 170             | 164.5                    | 80.3          | 65.0          | 59.4           | 56.7          |
| 180             | 174.1                    | 82.8          | 66.3          | 60.2           | 57.2          |
| 190             | 183.6                    | 85.3          | 67.5          | 61.0           | 57.8          |
| 200             | 193.1                    | 87.9          | 68.8          | 61.8           | 58.3          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.



# Pipe heat loss and surface temperature

## 1" Uponor PEX heat loss at 50°F/10°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -5.5                  | -2.9          | -2.2          | -1.8           | -1.6          |
| 40              | -2.8                  | -1.5          | -1.1          | -0.9           | -0.8          |
| 50              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 60              | 2.8                   | 1.5           | 1.1           | 0.9            | 0.8           |
| 70              | 5.5                   | 2.9           | 2.2           | 1.8            | 1.6           |
| 80              | 8.3                   | 4.4           | 3.2           | 2.7            | 2.4           |
| 90              | 11.1                  | 5.8           | 4.3           | 3.6            | 3.2           |
| 100             | 13.9                  | 7.3           | 5.4           | 4.5            | 4.0           |
| 110             | 16.6                  | 8.7           | 6.5           | 5.4            | 4.8           |
| 120             | 19.4                  | 10.2          | 7.6           | 6.3            | 5.6           |
| 130             | 22.2                  | 11.7          | 8.7           | 7.2            | 6.4           |
| 140             | 25.0                  | 13.1          | 9.7           | 8.1            | 7.2           |
| 150             | 27.7                  | 14.6          | 10.8          | 9.0            | 8.0           |
| 160             | 30.5                  | 16.0          | 11.9          | 9.9            | 8.8           |
| 170             | 33.3                  | 17.5          | 13.0          | 10.8           | 9.6           |
| 180             | 36.1                  | 18.9          | 14.1          | 11.8           | 10.4          |
| 190             | 38.8                  | 20.4          | 15.2          | 12.7           | 11.2          |
| 200             | 41.6                  | 21.8          | 16.2          | 13.6           | 12.0          |

## 1" Uponor PEX surface temperature at 50°F/10°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 31.2                     | 44.8          | 47.4          | 48.3           | 48.8          |
| 40              | 40.6                     | 47.4          | 48.7          | 49.2           | 49.4          |
| 50              | 50.0                     | 50.0          | 50.0          | 50.0           | 50.0          |
| 60              | 59.4                     | 52.6          | 51.3          | 50.8           | 50.6          |
| 70              | 68.8                     | 55.2          | 52.6          | 51.7           | 51.2          |
| 80              | 78.3                     | 57.9          | 54.0          | 52.5           | 51.8          |
| 90              | 87.7                     | 60.5          | 55.3          | 53.3           | 52.4          |
| 100             | 97.1                     | 63.1          | 56.6          | 54.2           | 53.0          |
| 110             | 106.5                    | 65.7          | 57.9          | 55.0           | 53.6          |
| 120             | 115.9                    | 68.3          | 59.3          | 55.9           | 54.2          |
| 130             | 125.3                    | 70.9          | 60.6          | 56.7           | 54.8          |
| 140             | 134.8                    | 73.6          | 61.9          | 57.5           | 55.3          |
| 150             | 144.2                    | 76.2          | 63.2          | 58.4           | 55.9          |
| 160             | 153.6                    | 78.8          | 64.6          | 59.2           | 56.5          |
| 170             | 163.0                    | 81.4          | 65.9          | 60.0           | 57.1          |
| 180             | 172.4                    | 84.0          | 67.2          | 60.9           | 57.7          |
| 190             | 181.9                    | 86.7          | 68.5          | 61.7           | 58.3          |
| 200             | 191.3                    | 89.3          | 69.8          | 62.6           | 58.9          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## 1¼" Uponor PEX heat loss at 50°F/10°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -6.7                  | -3.3          | -2.4          | -2.0           | -1.8          |
| 40              | -3.3                  | -1.7          | -1.2          | -1.0           | -0.9          |
| 50              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 60              | 3.3                   | 1.7           | 1.2           | 1.0            | 0.9           |
| 70              | 6.7                   | 3.3           | 2.4           | 2.0            | 1.8           |
| 80              | 10.0                  | 5.0           | 3.7           | 3.0            | 2.6           |
| 90              | 13.4                  | 6.7           | 4.9           | 4.0            | 3.5           |
| 100             | 16.7                  | 8.3           | 6.1           | 5.0            | 4.4           |
| 110             | 20.1                  | 10.0          | 7.3           | 6.0            | 5.3           |
| 120             | 23.4                  | 11.7          | 8.5           | 7.1            | 6.2           |
| 130             | 26.8                  | 13.3          | 9.8           | 8.1            | 7.1           |
| 140             | 30.1                  | 15.0          | 11.0          | 9.1            | 7.9           |
| 150             | 33.5                  | 16.7          | 12.2          | 10.1           | 8.8           |
| 160             | 36.8                  | 18.4          | 13.4          | 11.1           | 9.7           |
| 170             | 40.2                  | 20.0          | 14.6          | 12.1           | 10.6          |
| 180             | 43.5                  | 21.7          | 15.9          | 13.1           | 11.5          |
| 190             | 46.9                  | 23.4          | 17.1          | 14.1           | 12.4          |
| 200             | 50.2                  | 25.0          | 18.3          | 15.1           | 13.2          |

## 1¼" Uponor PEX surface temperature at 50°F/10°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 31.4                     | 44.6          | 47.2          | 48.2           | 48.7          |
| 40              | 40.7                     | 47.3          | 48.6          | 49.1           | 49.4          |
| 50              | 50.0                     | 50.0          | 50.0          | 50.0           | 50.0          |
| 60              | 59.3                     | 52.7          | 51.4          | 50.9           | 50.6          |
| 70              | 68.6                     | 55.4          | 52.8          | 51.8           | 51.3          |
| 80              | 77.9                     | 58.1          | 54.1          | 52.6           | 51.9          |
| 90              | 87.2                     | 60.7          | 55.5          | 53.5           | 52.5          |
| 100             | 96.5                     | 63.4          | 56.9          | 54.4           | 53.1          |
| 110             | 105.8                    | 66.1          | 58.3          | 55.3           | 53.8          |
| 120             | 115.1                    | 68.8          | 59.7          | 56.2           | 54.4          |
| 130             | 124.4                    | 71.5          | 61.0          | 57.0           | 55.0          |
| 140             | 133.7                    | 74.2          | 62.4          | 57.9           | 55.6          |
| 150             | 143.0                    | 76.8          | 63.8          | 58.8           | 56.3          |
| 160             | 152.3                    | 79.5          | 65.2          | 59.7           | 56.9          |
| 170             | 161.6                    | 82.2          | 66.6          | 60.6           | 57.5          |
| 180             | 170.9                    | 84.9          | 67.9          | 61.4           | 58.2          |
| 190             | 180.2                    | 87.6          | 69.3          | 62.3           | 58.8          |
| 200             | 189.5                    | 90.3          | 70.7          | 63.2           | 59.4          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## 1½" Uponor PEX heat loss at 50°F/10°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -7.8                  | -3.8          | -2.7          | -2.2           | -1.9          |
| 40              | -3.9                  | -1.9          | -1.4          | -1.1           | -1.0          |
| 50              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 60              | 3.9                   | 1.9           | 1.4           | 1.1            | 1.0           |
| 70              | 7.8                   | 3.8           | 2.7           | 2.2            | 1.9           |
| 80              | 11.7                  | 5.6           | 4.1           | 3.3            | 2.9           |
| 90              | 15.6                  | 7.5           | 5.4           | 4.4            | 3.9           |
| 100             | 19.5                  | 9.4           | 6.8           | 5.5            | 4.8           |
| 110             | 23.4                  | 11.3          | 8.1           | 6.6            | 5.8           |
| 120             | 27.3                  | 13.1          | 9.5           | 7.8            | 6.7           |
| 130             | 31.2                  | 15.0          | 10.8          | 8.9            | 7.7           |
| 140             | 35.1                  | 16.9          | 12.2          | 10.0           | 8.7           |
| 150             | 39.0                  | 18.8          | 13.5          | 11.1           | 9.6           |
| 160             | 43.0                  | 20.6          | 14.9          | 12.2           | 10.6          |
| 170             | 46.9                  | 22.5          | 16.2          | 13.3           | 11.6          |
| 180             | 50.8                  | 24.4          | 17.6          | 14.4           | 12.5          |
| 190             | 54.7                  | 26.3          | 18.9          | 15.5           | 13.5          |
| 200             | 58.6                  | 28.1          | 20.3          | 16.6           | 14.5          |

## 1½" Uponor PEX surface temperature at 50°F/10°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 31.6                     | 44.5          | 47.1          | 48.2           | 48.7          |
| 40              | 40.8                     | 47.3          | 48.6          | 49.1           | 49.3          |
| 50              | 50.0                     | 50.0          | 50.0          | 50.0           | 50.0          |
| 60              | 59.2                     | 52.7          | 51.4          | 50.9           | 50.7          |
| 70              | 68.4                     | 55.5          | 52.9          | 51.8           | 51.3          |
| 80              | 77.5                     | 58.2          | 54.3          | 52.7           | 52.0          |
| 90              | 86.7                     | 60.9          | 55.7          | 53.7           | 52.6          |
| 100             | 95.9                     | 63.7          | 57.1          | 54.6           | 53.3          |
| 110             | 105.1                    | 66.4          | 58.6          | 55.5           | 53.9          |
| 120             | 114.2                    | 69.1          | 60.0          | 56.4           | 54.6          |
| 130             | 123.4                    | 71.8          | 61.4          | 57.3           | 55.2          |
| 140             | 132.6                    | 74.6          | 62.8          | 58.2           | 55.9          |
| 150             | 141.8                    | 77.3          | 64.3          | 59.1           | 56.5          |
| 160             | 151.0                    | 80.0          | 65.7          | 60.1           | 57.2          |
| 170             | 160.1                    | 82.8          | 67.1          | 61.0           | 57.9          |
| 180             | 169.3                    | 85.5          | 68.5          | 61.9           | 58.5          |
| 190             | 178.5                    | 88.2          | 70.0          | 62.8           | 59.2          |
| 200             | 187.7                    | 91.0          | 71.4          | 63.7           | 59.8          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## 2" Uponor PEX heat loss at 50°F/10°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -10.0                 | -4.6          | -3.2          | -2.6           | -2.2          |
| 40              | -5.0                  | -2.3          | -1.6          | -1.3           | -1.1          |
| 50              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 60              | 5.0                   | 2.3           | 1.6           | 1.3            | 1.1           |
| 70              | 10.0                  | 4.6           | 3.2           | 2.6            | 2.2           |
| 80              | 14.9                  | 6.9           | 4.8           | 3.9            | 3.4           |
| 90              | 19.9                  | 9.1           | 6.4           | 5.2            | 4.5           |
| 100             | 24.9                  | 11.4          | 8.1           | 6.5            | 5.6           |
| 110             | 29.9                  | 13.7          | 9.7           | 7.8            | 6.7           |
| 120             | 34.9                  | 16.0          | 11.3          | 9.1            | 7.8           |
| 130             | 39.9                  | 18.3          | 12.9          | 10.4           | 9.0           |
| 140             | 44.8                  | 20.6          | 14.5          | 11.7           | 10.1          |
| 150             | 49.8                  | 22.8          | 16.1          | 13.0           | 11.2          |
| 160             | 54.8                  | 25.1          | 17.7          | 14.3           | 12.3          |
| 170             | 59.8                  | 27.4          | 19.3          | 15.6           | 13.5          |
| 180             | 64.8                  | 29.7          | 21.0          | 16.9           | 14.6          |
| 190             | 69.8                  | 32.0          | 22.6          | 18.2           | 15.7          |
| 200             | 74.7                  | 34.3          | 24.2          | 19.5           | 16.8          |

## 2" Uponor PEX surface temperature at 50°F/10°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 32.1                     | 44.4          | 47.0          | 48.1           | 48.6          |
| 40              | 41.0                     | 47.2          | 48.5          | 49.0           | 49.3          |
| 50              | 50.0                     | 50.0          | 50.0          | 50.0           | 50.0          |
| 60              | 59.0                     | 52.8          | 51.5          | 51.0           | 50.7          |
| 70              | 67.9                     | 55.6          | 53.0          | 51.9           | 51.4          |
| 80              | 76.9                     | 58.4          | 54.5          | 52.9           | 52.1          |
| 90              | 85.8                     | 61.2          | 56.0          | 53.9           | 52.8          |
| 100             | 94.8                     | 64.0          | 57.5          | 54.9           | 53.5          |
| 110             | 103.7                    | 66.8          | 59.0          | 55.8           | 54.2          |
| 120             | 112.7                    | 69.5          | 60.5          | 56.8           | 54.9          |
| 130             | 121.7                    | 72.3          | 61.9          | 57.8           | 55.6          |
| 140             | 130.6                    | 75.1          | 63.4          | 58.7           | 56.3          |
| 150             | 139.6                    | 77.9          | 64.9          | 59.7           | 57.0          |
| 160             | 148.5                    | 80.7          | 66.4          | 60.7           | 57.7          |
| 170             | 157.5                    | 83.5          | 67.9          | 61.6           | 58.4          |
| 180             | 166.4                    | 86.3          | 69.4          | 62.6           | 59.1          |
| 190             | 175.4                    | 89.1          | 70.9          | 63.6           | 59.8          |
| 200             | 184.3                    | 91.9          | 72.4          | 64.6           | 60.5          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

## Pipe heat loss and surface temperature

### 2½" Uponor PEX heat loss at 50°F/10°C Ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -12.0                 | -5.4          | -3.7          | -3.0           | -2.5          |
| 40              | -6.0                  | -2.7          | -1.9          | -1.5           | -1.3          |
| 50              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 60              | 6.0                   | 2.7           | 1.9           | 1.5            | 1.3           |
| 70              | 12.0                  | 5.4           | 3.7           | 3.0            | 2.5           |
| 80              | 18.0                  | 8.0           | 5.6           | 4.5            | 3.8           |
| 90              | 24.0                  | 10.7          | 7.5           | 6.0            | 5.1           |
| 100             | 30.0                  | 13.4          | 9.3           | 7.5            | 6.4           |
| 110             | 36.0                  | 16.1          | 11.2          | 8.9            | 7.6           |
| 120             | 42.0                  | 18.8          | 13.1          | 10.4           | 8.9           |
| 130             | 48.0                  | 21.5          | 14.9          | 11.9           | 10.2          |
| 140             | 54.1                  | 24.1          | 16.8          | 13.4           | 11.5          |
| 150             | 60.1                  | 26.8          | 18.6          | 14.9           | 12.7          |
| 160             | 66.1                  | 29.5          | 20.5          | 16.4           | 14.0          |
| 170             | 72.1                  | 32.2          | 22.4          | 17.9           | 15.3          |
| 180             | 78.1                  | 34.9          | 24.2          | 19.4           | 16.5          |
| 190             | 84.1                  | 37.5          | 26.1          | 20.9           | 17.8          |
| 200             | 90.1                  | 40.2          | 28.0          | 22.4           | 19.1          |

### 2½" Uponor PEX surface temperature at 50°F/10°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 32.5                     | 44.3          | 46.9          | 48.0           | 48.5          |
| 40              | 41.3                     | 47.2          | 48.5          | 49.0           | 49.3          |
| 50              | 50.0                     | 50.0          | 50.0          | 50.0           | 50.0          |
| 60              | 58.7                     | 52.8          | 51.5          | 51.0           | 50.7          |
| 70              | 67.5                     | 55.7          | 53.1          | 52.0           | 51.5          |
| 80              | 76.2                     | 58.5          | 54.6          | 53.0           | 52.2          |
| 90              | 85.0                     | 61.3          | 56.2          | 54.0           | 52.9          |
| 100             | 93.7                     | 64.1          | 57.7          | 55.1           | 53.7          |
| 110             | 102.4                    | 67.0          | 59.2          | 56.1           | 54.4          |
| 120             | 111.2                    | 69.8          | 60.8          | 57.1           | 55.1          |
| 130             | 119.9                    | 72.6          | 62.3          | 58.1           | 55.9          |
| 140             | 128.7                    | 75.4          | 63.9          | 59.1           | 56.6          |
| 150             | 137.4                    | 78.3          | 65.4          | 60.1           | 57.3          |
| 160             | 146.1                    | 81.1          | 66.9          | 61.1           | 58.1          |
| 170             | 154.9                    | 83.9          | 68.5          | 62.1           | 58.8          |
| 180             | 163.6                    | 86.7          | 70.0          | 63.2           | 59.5          |
| 190             | 172.3                    | 89.6          | 71.6          | 64.2           | 60.3          |
| 200             | 181.1                    | 92.4          | 73.1          | 65.2           | 61.0          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## 3" Uponor PEX heat loss at 50°F/10°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -14.0                 | -6.1          | -4.2          | -3.3           | -2.8          |
| 40              | -7.0                  | -3.1          | -2.1          | -1.7           | -1.4          |
| 50              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 60              | 7.0                   | 3.1           | 2.1           | 1.7            | 1.4           |
| 70              | 14.0                  | 6.1           | 4.2           | 3.3            | 2.8           |
| 80              | 21.0                  | 9.2           | 6.3           | 5.0            | 4.3           |
| 90              | 28.0                  | 12.3          | 8.5           | 6.7            | 5.7           |
| 100             | 34.9                  | 15.4          | 10.6          | 8.4            | 7.1           |
| 110             | 41.9                  | 18.4          | 12.7          | 10.0           | 8.5           |
| 120             | 48.9                  | 21.5          | 14.8          | 11.7           | 9.9           |
| 130             | 55.9                  | 24.6          | 16.9          | 13.4           | 11.4          |
| 140             | 62.9                  | 27.6          | 19.0          | 15.1           | 12.8          |
| 150             | 69.9                  | 30.7          | 21.1          | 16.7           | 14.2          |
| 160             | 76.9                  | 33.8          | 23.2          | 18.4           | 15.6          |
| 170             | 83.9                  | 36.9          | 25.4          | 20.1           | 17.0          |
| 180             | 90.8                  | 39.9          | 27.5          | 21.8           | 18.5          |
| 190             | 97.8                  | 43.0          | 29.6          | 23.4           | 19.9          |
| 200             | 104.8                 | 46.1          | 31.7          | 25.1           | 21.3          |

## 3" Uponor PEX surface temperature at 50°F/10°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 32.9                     | 44.3          | 46.9          | 47.9           | 48.5          |
| 40              | 41.5                     | 47.2          | 48.4          | 49.0           | 49.2          |
| 50              | 50.0                     | 50.0          | 50.0          | 50.0           | 50.0          |
| 60              | 58.5                     | 52.8          | 51.6          | 51.0           | 50.8          |
| 70              | 67.1                     | 55.7          | 53.1          | 52.1           | 51.5          |
| 80              | 75.6                     | 58.5          | 54.7          | 53.1           | 52.3          |
| 90              | 84.2                     | 61.4          | 56.3          | 54.2           | 53.0          |
| 100             | 92.7                     | 64.2          | 57.9          | 55.2           | 53.8          |
| 110             | 101.3                    | 67.1          | 59.4          | 56.3           | 54.6          |
| 120             | 109.8                    | 69.9          | 61.0          | 57.3           | 55.3          |
| 130             | 118.3                    | 72.8          | 62.6          | 58.4           | 56.1          |
| 140             | 126.9                    | 75.6          | 64.2          | 59.4           | 56.9          |
| 150             | 135.4                    | 78.4          | 65.7          | 60.4           | 57.6          |
| 160             | 144.0                    | 81.3          | 67.3          | 61.5           | 58.4          |
| 170             | 152.5                    | 84.1          | 68.9          | 62.5           | 59.1          |
| 180             | 161.0                    | 87.0          | 70.5          | 63.6           | 59.9          |
| 190             | 169.6                    | 89.8          | 72.0          | 64.6           | 60.7          |
| 200             | 178.1                    | 92.7          | 73.6          | 65.7           | 61.4          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity. This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## ½" Uponor PEX heat loss at 70°F/21.1°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -6.3                  | -4.1          | -3.2          | -2.7           | -2.4          |
| 40              | -4.7                  | -3.0          | -2.4          | -2.0           | -1.8          |
| 50              | -3.2                  | -2.0          | -1.6          | -1.4           | -1.2          |
| 60              | -1.6                  | -1.0          | -0.8          | -0.7           | -0.6          |
| 70              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 80              | 1.6                   | 1.0           | 0.8           | 0.7            | 0.6           |
| 90              | 3.2                   | 2.0           | 1.6           | 1.4            | 1.2           |
| 100             | 4.7                   | 3.0           | 2.4           | 2.0            | 1.8           |
| 110             | 6.3                   | 4.1           | 3.2           | 2.7            | 2.4           |
| 120             | 7.9                   | 5.1           | 4.0           | 3.4            | 3.1           |
| 130             | 9.5                   | 6.1           | 4.7           | 4.1            | 3.7           |
| 140             | 11.1                  | 7.1           | 5.5           | 4.8            | 4.3           |
| 150             | 12.6                  | 8.1           | 6.3           | 5.4            | 4.9           |
| 160             | 14.2                  | 9.1           | 7.1           | 6.1            | 5.5           |
| 170             | 15.8                  | 10.1          | 7.9           | 6.8            | 6.1           |
| 180             | 17.4                  | 11.1          | 8.7           | 7.5            | 6.7           |
| 190             | 18.9                  | 12.2          | 9.5           | 8.2            | 7.3           |
| 200             | 20.5                  | 13.2          | 10.3          | 8.8            | 8.0           |

## ½" Uponor PEX surface temperature at 70°F/21.1°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 31.4                     | 60.5          | 65.4          | 67.1           | 68.0          |
| 40              | 41.1                     | 62.9          | 66.5          | 67.9           | 68.5          |
| 50              | 50.7                     | 65.2          | 67.7          | 68.6           | 69.0          |
| 60              | 60.4                     | 67.6          | 68.8          | 69.3           | 69.5          |
| 70              | 70.0                     | 70.0          | 70.0          | 70.0           | 70.0          |
| 80              | 79.6                     | 72.4          | 71.2          | 70.7           | 70.5          |
| 90              | 89.3                     | 74.8          | 72.3          | 71.4           | 71.0          |
| 100             | 98.9                     | 77.1          | 73.5          | 72.1           | 71.5          |
| 110             | 108.6                    | 79.5          | 74.6          | 72.9           | 72.0          |
| 120             | 118.2                    | 81.9          | 75.8          | 73.6           | 72.5          |
| 130             | 127.9                    | 84.3          | 76.9          | 74.3           | 73.0          |
| 140             | 137.5                    | 86.7          | 78.1          | 75.0           | 73.5          |
| 150             | 147.2                    | 89.0          | 79.2          | 75.7           | 74.0          |
| 160             | 156.8                    | 91.4          | 80.4          | 76.4           | 74.5          |
| 170             | 166.5                    | 93.8          | 81.5          | 77.2           | 75.1          |
| 180             | 176.1                    | 96.2          | 82.7          | 77.9           | 75.6          |
| 190             | 185.8                    | 98.6          | 83.8          | 78.6           | 76.1          |
| 200             | 195.4                    | 101.0         | 85.0          | 79.3           | 76.6          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## ¾" Uponor PEX heat loss at 70°F/21.1°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -8.7                  | -5.0          | -3.8          | -3.2           | -2.8          |
| 40              | -6.6                  | -3.7          | -2.8          | -2.4           | -2.1          |
| 50              | -4.4                  | -2.5          | -1.9          | -1.6           | -1.4          |
| 60              | -2.2                  | -1.2          | -0.9          | -0.8           | -0.7          |
| 70              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 80              | 2.2                   | 1.2           | 0.9           | 0.8            | 0.7           |
| 90              | 4.4                   | 2.5           | 1.9           | 1.6            | 1.4           |
| 100             | 6.6                   | 3.7           | 2.8           | 2.4            | 2.1           |
| 110             | 8.7                   | 5.0           | 3.8           | 3.2            | 2.8           |
| 120             | 10.9                  | 6.2           | 4.7           | 4.0            | 3.5           |
| 130             | 13.1                  | 7.4           | 5.6           | 4.8            | 4.3           |
| 140             | 15.3                  | 8.7           | 6.6           | 5.6            | 5.0           |
| 150             | 17.5                  | 9.9           | 7.5           | 6.4            | 5.7           |
| 160             | 19.7                  | 11.2          | 8.5           | 7.2            | 6.4           |
| 170             | 21.9                  | 12.4          | 9.4           | 8.0            | 7.1           |
| 180             | 24.0                  | 13.6          | 10.4          | 8.8            | 7.8           |
| 190             | 26.2                  | 14.9          | 11.3          | 9.6            | 8.5           |
| 200             | 28.4                  | 16.1          | 12.2          | 10.3           | 9.2           |

## ¾" Uponor PEX surface temperature at 70°F/21.1°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 31.8                     | 59.9          | 65.0          | 66.9           | 67.8          |
| 40              | 41.4                     | 62.4          | 66.2          | 67.6           | 68.3          |
| 50              | 50.9                     | 65.0          | 67.5          | 68.4           | 68.9          |
| 60              | 60.5                     | 67.5          | 68.7          | 69.2           | 69.4          |
| 70              | 70.0                     | 70.0          | 70.0          | 70.0           | 70.0          |
| 80              | 79.5                     | 72.5          | 71.3          | 70.8           | 70.6          |
| 90              | 89.1                     | 75.0          | 72.5          | 71.6           | 71.1          |
| 100             | 98.6                     | 77.6          | 73.8          | 72.4           | 71.7          |
| 110             | 108.2                    | 80.1          | 75.0          | 73.1           | 72.2          |
| 120             | 117.7                    | 82.6          | 76.3          | 73.9           | 72.8          |
| 130             | 127.3                    | 85.1          | 77.5          | 74.7           | 73.3          |
| 140             | 136.8                    | 87.7          | 78.8          | 75.5           | 73.9          |
| 150             | 146.3                    | 90.2          | 80.0          | 76.3           | 74.4          |
| 160             | 155.9                    | 92.7          | 81.3          | 77.1           | 75.0          |
| 170             | 165.4                    | 95.2          | 82.5          | 77.8           | 75.6          |
| 180             | 175.0                    | 97.8          | 83.8          | 78.6           | 76.1          |
| 190             | 184.5                    | 100.3         | 85.0          | 79.4           | 76.7          |
| 200             | 194.1                    | 102.8         | 86.3          | 80.2           | 77.2          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.



# Pipe heat loss and surface temperature

## 1" Uponor PEX heat loss at 70°F/21.1°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -11.1                 | -5.8          | -4.3          | -3.6           | -3.2          |
| 40              | -8.3                  | -4.4          | -3.2          | -2.7           | -2.4          |
| 50              | -5.5                  | -2.9          | -2.2          | -1.8           | -1.6          |
| 60              | -2.8                  | -1.5          | -1.1          | -0.9           | -0.8          |
| 70              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 80              | 2.8                   | 1.5           | 1.1           | 0.9            | 0.8           |
| 90              | 5.5                   | 2.9           | 2.2           | 1.8            | 1.6           |
| 100             | 8.3                   | 4.4           | 3.2           | 2.7            | 2.4           |
| 110             | 11.1                  | 5.8           | 4.3           | 3.6            | 3.2           |
| 120             | 13.9                  | 7.3           | 5.4           | 4.5            | 4.0           |
| 130             | 16.6                  | 8.7           | 6.5           | 5.4            | 4.8           |
| 140             | 19.4                  | 10.2          | 7.6           | 6.3            | 5.6           |
| 150             | 22.2                  | 11.7          | 8.7           | 7.2            | 6.4           |
| 160             | 25.0                  | 13.1          | 9.7           | 8.1            | 7.2           |
| 170             | 27.7                  | 14.6          | 10.8          | 9.0            | 8.0           |
| 180             | 30.5                  | 16.0          | 11.9          | 9.9            | 8.8           |
| 190             | 33.3                  | 17.5          | 13.0          | 10.8           | 9.6           |
| 200             | 36.1                  | 18.9          | 14.1          | 11.8           | 10.4          |

## 1" Uponor PEX surface temperature at 70°F/21.1°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 32.3                     | 59.5          | 64.7          | 66.7           | 67.6          |
| 40              | 41.7                     | 62.1          | 66.0          | 67.5           | 68.2          |
| 50              | 51.2                     | 64.8          | 67.4          | 68.3           | 68.8          |
| 60              | 60.6                     | 67.4          | 68.7          | 69.2           | 69.4          |
| 70              | 70.0                     | 70.0          | 70.0          | 70.0           | 70.0          |
| 80              | 79.4                     | 72.6          | 71.3          | 70.8           | 70.6          |
| 90              | 88.8                     | 75.2          | 72.6          | 71.7           | 71.2          |
| 100             | 98.3                     | 77.9          | 74.0          | 72.5           | 71.8          |
| 110             | 107.7                    | 80.5          | 75.3          | 73.3           | 72.4          |
| 120             | 117.1                    | 83.1          | 76.6          | 74.2           | 73.0          |
| 130             | 126.5                    | 85.7          | 77.9          | 75.0           | 73.6          |
| 140             | 135.9                    | 88.3          | 79.3          | 75.9           | 74.2          |
| 150             | 145.3                    | 90.9          | 80.6          | 76.7           | 74.8          |
| 160             | 154.8                    | 93.6          | 81.9          | 77.5           | 75.3          |
| 170             | 164.2                    | 96.2          | 83.2          | 78.4           | 75.9          |
| 180             | 173.6                    | 98.8          | 84.6          | 79.2           | 76.5          |
| 190             | 183.0                    | 101.4         | 85.9          | 80.0           | 77.1          |
| 200             | 192.4                    | 104.0         | 87.2          | 80.9           | 77.7          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## 1¼" Uponor PEX heat loss at 70°F/21.1°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -13.4                 | -6.7          | -4.9          | -4.0           | -3.5          |
| 40              | -10.0                 | -5.0          | -3.7          | -3.0           | -2.6          |
| 50              | -6.7                  | -3.3          | -2.4          | -2.0           | -1.8          |
| 60              | -3.3                  | -1.7          | -1.2          | -1.0           | -0.9          |
| 70              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 80              | 3.3                   | 1.7           | 1.2           | 1.0            | 0.9           |
| 90              | 6.7                   | 3.3           | 2.4           | 2.0            | 1.8           |
| 100             | 10.0                  | 5.0           | 3.7           | 3.0            | 2.6           |
| 110             | 13.4                  | 6.7           | 4.9           | 4.0            | 3.5           |
| 120             | 16.7                  | 8.3           | 6.1           | 5.0            | 4.4           |
| 130             | 20.1                  | 10.0          | 7.3           | 6.0            | 5.3           |
| 140             | 23.4                  | 11.7          | 8.5           | 7.1            | 6.2           |
| 150             | 26.8                  | 13.3          | 9.8           | 8.1            | 7.1           |
| 160             | 30.1                  | 15.0          | 11.0          | 9.1            | 7.9           |
| 170             | 33.5                  | 16.7          | 12.2          | 10.1           | 8.8           |
| 180             | 36.8                  | 18.4          | 13.4          | 11.1           | 9.7           |
| 190             | 40.2                  | 20.0          | 14.6          | 12.1           | 10.6          |
| 200             | 43.5                  | 21.7          | 15.9          | 13.1           | 11.5          |

## 1¼" Uponor PEX surface temperature at 70°F/21.1°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 32.8                     | 59.3          | 64.5          | 66.5           | 67.5          |
| 40              | 42.1                     | 61.9          | 65.9          | 67.4           | 68.1          |
| 50              | 51.4                     | 64.6          | 67.2          | 68.2           | 68.7          |
| 60              | 60.7                     | 67.3          | 68.6          | 69.1           | 69.4          |
| 70              | 70.0                     | 70.0          | 70.0          | 70.0           | 70.0          |
| 80              | 79.3                     | 72.7          | 71.4          | 70.9           | 70.6          |
| 90              | 88.6                     | 75.4          | 72.8          | 71.8           | 71.3          |
| 100             | 97.9                     | 78.1          | 74.1          | 72.6           | 71.9          |
| 110             | 107.2                    | 80.7          | 75.5          | 73.5           | 72.5          |
| 120             | 116.5                    | 83.4          | 76.9          | 74.4           | 73.1          |
| 130             | 125.8                    | 86.1          | 78.3          | 75.3           | 73.8          |
| 140             | 135.1                    | 88.8          | 79.7          | 76.2           | 74.4          |
| 150             | 144.4                    | 91.5          | 81.0          | 77.0           | 75.0          |
| 160             | 153.7                    | 94.2          | 82.4          | 77.9           | 75.6          |
| 170             | 163.0                    | 96.8          | 83.8          | 78.8           | 76.3          |
| 180             | 172.3                    | 99.5          | 85.2          | 79.7           | 76.9          |
| 190             | 181.6                    | 102.2         | 86.6          | 80.6           | 77.5          |
| 200             | 190.9                    | 104.9         | 87.9          | 81.4           | 78.2          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## 1½" Uponor PEX heat loss at 70°F/21.1°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -15.6                 | -7.5          | -5.4          | -4.4           | -3.9          |
| 40              | -11.7                 | -5.6          | -4.1          | -3.3           | -2.9          |
| 50              | -7.8                  | -3.8          | -2.7          | -2.2           | -1.9          |
| 60              | -3.9                  | -1.9          | -1.4          | -1.1           | -1.0          |
| 70              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 80              | 3.9                   | 1.9           | 1.4           | 1.1            | 1.0           |
| 90              | 7.8                   | 3.8           | 2.7           | 2.2            | 1.9           |
| 100             | 11.7                  | 5.6           | 4.1           | 3.3            | 2.9           |
| 110             | 15.6                  | 7.5           | 5.4           | 4.4            | 3.9           |
| 120             | 19.5                  | 9.4           | 6.8           | 5.5            | 4.8           |
| 130             | 23.4                  | 11.3          | 8.1           | 6.6            | 5.8           |
| 140             | 27.3                  | 13.1          | 9.5           | 7.8            | 6.7           |
| 150             | 31.2                  | 15.0          | 10.8          | 8.9            | 7.7           |
| 160             | 35.1                  | 16.9          | 12.2          | 10.0           | 8.7           |
| 170             | 39.0                  | 18.8          | 13.5          | 11.1           | 9.6           |
| 180             | 43.0                  | 20.6          | 14.9          | 12.2           | 10.6          |
| 190             | 46.9                  | 22.5          | 16.2          | 13.3           | 11.6          |
| 200             | 50.8                  | 24.4          | 17.6          | 14.4           | 12.5          |

## 1½" Uponor PEX surface temperature at 70°F/21.1°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 33.3                     | 59.1          | 64.3          | 66.3           | 67.4          |
| 40              | 42.5                     | 61.8          | 65.7          | 67.3           | 68.0          |
| 50              | 51.6                     | 64.5          | 67.1          | 68.2           | 68.7          |
| 60              | 60.8                     | 67.3          | 68.6          | 69.1           | 69.3          |
| 70              | 70.0                     | 70.0          | 70.0          | 70.0           | 70.0          |
| 80              | 79.2                     | 72.7          | 71.4          | 70.9           | 70.7          |
| 90              | 88.4                     | 75.5          | 72.9          | 71.8           | 71.3          |
| 100             | 97.5                     | 78.2          | 74.3          | 72.7           | 72.0          |
| 110             | 106.7                    | 80.9          | 75.7          | 73.7           | 72.6          |
| 120             | 115.9                    | 83.7          | 77.1          | 74.6           | 73.3          |
| 130             | 125.1                    | 86.4          | 78.6          | 75.5           | 73.9          |
| 140             | 134.2                    | 89.1          | 80.0          | 76.4           | 74.6          |
| 150             | 143.4                    | 91.8          | 81.4          | 77.3           | 75.2          |
| 160             | 152.6                    | 94.6          | 82.8          | 78.2           | 75.9          |
| 170             | 161.8                    | 97.3          | 84.3          | 79.1           | 76.5          |
| 180             | 171.0                    | 100.0         | 85.7          | 80.1           | 77.2          |
| 190             | 180.1                    | 102.8         | 87.1          | 81.0           | 77.9          |
| 200             | 189.3                    | 105.5         | 88.5          | 81.9           | 78.5          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## 2" Uponor PEX heat loss at 70°F/21.1°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -19.9                 | -9.1          | -6.4          | -5.2           | -4.5          |
| 40              | -14.9                 | -6.9          | -4.8          | -3.9           | -3.4          |
| 50              | -10.0                 | -4.6          | -3.2          | -2.6           | -2.2          |
| 60              | -5.0                  | -2.3          | -1.6          | -1.3           | -1.1          |
| 70              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 80              | 5.0                   | 2.3           | 1.6           | 1.3            | 1.1           |
| 90              | 10.0                  | 4.6           | 3.2           | 2.6            | 2.2           |
| 100             | 14.9                  | 6.9           | 4.8           | 3.9            | 3.4           |
| 110             | 19.9                  | 9.1           | 6.4           | 5.2            | 4.5           |
| 120             | 24.9                  | 11.4          | 8.1           | 6.5            | 5.6           |
| 130             | 29.9                  | 13.7          | 9.7           | 7.8            | 6.7           |
| 140             | 34.9                  | 16.0          | 11.3          | 9.1            | 7.8           |
| 150             | 39.9                  | 18.3          | 12.9          | 10.4           | 9.0           |
| 160             | 44.8                  | 20.6          | 14.5          | 11.7           | 10.1          |
| 170             | 49.8                  | 22.8          | 16.1          | 13.0           | 11.2          |
| 180             | 54.8                  | 25.1          | 17.7          | 14.3           | 12.3          |
| 190             | 59.8                  | 27.4          | 19.3          | 15.6           | 13.5          |
| 200             | 64.8                  | 29.7          | 21.0          | 16.9           | 14.6          |

## 2" Uponor PEX surface temperature at 70°F/21.1°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 34.2                     | 58.8          | 64.0          | 66.1           | 67.2          |
| 40              | 43.1                     | 61.6          | 65.5          | 67.1           | 67.9          |
| 50              | 52.1                     | 64.4          | 67.0          | 68.1           | 68.6          |
| 60              | 61.0                     | 67.2          | 68.5          | 69.0           | 69.3          |
| 70              | 70.0                     | 70.0          | 70.0          | 70.0           | 70.0          |
| 80              | 79.0                     | 72.8          | 71.5          | 71.0           | 70.7          |
| 90              | 87.9                     | 75.6          | 73.0          | 71.9           | 71.4          |
| 100             | 96.9                     | 78.4          | 74.5          | 72.9           | 72.1          |
| 110             | 105.8                    | 81.2          | 76.0          | 73.9           | 72.8          |
| 120             | 114.8                    | 84.0          | 77.5          | 74.9           | 73.5          |
| 130             | 123.7                    | 86.8          | 79.0          | 75.8           | 74.2          |
| 140             | 132.7                    | 89.5          | 80.5          | 76.8           | 74.9          |
| 150             | 141.7                    | 92.3          | 81.9          | 77.8           | 75.6          |
| 160             | 150.6                    | 95.1          | 83.4          | 78.7           | 76.3          |
| 170             | 159.6                    | 97.9          | 84.9          | 79.7           | 77.0          |
| 180             | 168.5                    | 100.7         | 86.4          | 80.7           | 77.7          |
| 190             | 177.5                    | 103.5         | 87.9          | 81.6           | 78.4          |
| 200             | 186.4                    | 106.3         | 89.4          | 82.6           | 79.1          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## 2½" Uponor PEX heat loss at 70°F/21.1°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -24.0                 | -10.7         | -7.5          | -6.0           | -5.1          |
| 40              | -18.0                 | -8.0          | -5.6          | -4.5           | -3.8          |
| 50              | -12.0                 | -5.4          | -3.7          | -3.0           | -2.5          |
| 60              | -6.0                  | -2.7          | -1.9          | -1.5           | -1.3          |
| 70              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 80              | 6.0                   | 2.7           | 1.9           | 1.5            | 1.3           |
| 90              | 12.0                  | 5.4           | 3.7           | 3.0            | 2.5           |
| 100             | 18.0                  | 8.0           | 5.6           | 4.5            | 3.8           |
| 110             | 24.0                  | 10.7          | 7.5           | 6.0            | 5.1           |
| 120             | 30.0                  | 13.4          | 9.3           | 7.5            | 6.4           |
| 130             | 36.0                  | 16.1          | 11.2          | 8.9            | 7.6           |
| 140             | 42.0                  | 18.8          | 13.1          | 10.4           | 8.9           |
| 150             | 48.0                  | 21.5          | 14.9          | 11.9           | 10.2          |
| 160             | 54.1                  | 24.1          | 16.8          | 13.4           | 11.5          |
| 170             | 60.1                  | 26.8          | 18.6          | 14.9           | 12.7          |
| 180             | 66.1                  | 29.5          | 20.5          | 16.4           | 14.0          |
| 190             | 72.1                  | 32.2          | 22.4          | 17.9           | 15.3          |
| 200             | 78.1                  | 34.9          | 24.2          | 19.4           | 16.5          |

## 2½" Uponor PEX surface temperature at 70°F/21.1°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 35.0                     | 58.7          | 63.8          | 66.0           | 67.1          |
| 40              | 43.8                     | 61.5          | 65.4          | 67.0           | 67.8          |
| 50              | 52.5                     | 64.3          | 66.9          | 68.0           | 68.5          |
| 60              | 61.3                     | 67.2          | 68.5          | 69.0           | 69.3          |
| 70              | 70.0                     | 70.0          | 70.0          | 70.0           | 70.0          |
| 80              | 78.7                     | 72.8          | 71.5          | 71.0           | 70.7          |
| 90              | 87.5                     | 75.7          | 73.1          | 72.0           | 71.5          |
| 100             | 96.2                     | 78.5          | 74.6          | 73.0           | 72.2          |
| 110             | 105.0                    | 81.3          | 76.2          | 74.0           | 72.9          |
| 120             | 113.7                    | 84.1          | 77.7          | 75.1           | 73.7          |
| 130             | 122.4                    | 87.0          | 79.2          | 76.1           | 74.4          |
| 140             | 131.2                    | 89.8          | 80.8          | 77.1           | 75.1          |
| 150             | 139.9                    | 92.6          | 82.3          | 78.1           | 75.9          |
| 160             | 148.7                    | 95.4          | 83.9          | 79.1           | 76.6          |
| 170             | 157.4                    | 98.3          | 85.4          | 80.1           | 77.3          |
| 180             | 166.1                    | 101.1         | 86.9          | 81.1           | 78.1          |
| 190             | 174.9                    | 103.9         | 88.5          | 82.1           | 78.8          |
| 200             | 183.6                    | 106.7         | 90.0          | 83.2           | 79.5          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## 3" Uponor PEX heat loss at 70°F/21.1°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -28.0                 | -12.3         | -8.5          | -6.7           | -5.7          |
| 40              | -21.0                 | -9.2          | -6.3          | -5.0           | -4.3          |
| 50              | -14.0                 | -6.1          | -4.2          | -3.3           | -2.8          |
| 60              | -7.0                  | -3.1          | -2.1          | -1.7           | -1.4          |
| 70              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 80              | 7.0                   | 3.1           | 2.1           | 1.7            | 1.4           |
| 90              | 14.0                  | 6.1           | 4.2           | 3.3            | 2.8           |
| 100             | 21.0                  | 9.2           | 6.3           | 5.0            | 4.3           |
| 110             | 28.0                  | 12.3          | 8.5           | 6.7            | 5.7           |
| 120             | 34.9                  | 15.4          | 10.6          | 8.4            | 7.1           |
| 130             | 41.9                  | 18.4          | 12.7          | 10.0           | 8.5           |
| 140             | 48.9                  | 21.5          | 14.8          | 11.7           | 9.9           |
| 150             | 55.9                  | 24.6          | 16.9          | 13.4           | 11.4          |
| 160             | 62.9                  | 27.6          | 19.0          | 15.1           | 12.8          |
| 170             | 69.9                  | 30.7          | 21.1          | 16.7           | 14.2          |
| 180             | 76.9                  | 33.8          | 23.2          | 18.4           | 15.6          |
| 190             | 83.9                  | 36.9          | 25.4          | 20.1           | 17.0          |
| 200             | 90.8                  | 39.9          | 27.5          | 21.8           | 18.5          |

## 3" Uponor PEX surface temperature at 70°F/21.1°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 35.8                     | 58.6          | 63.7          | 65.8           | 67.0          |
| 40              | 44.4                     | 61.5          | 65.3          | 66.9           | 67.7          |
| 50              | 52.9                     | 64.3          | 66.9          | 67.9           | 68.5          |
| 60              | 61.5                     | 67.2          | 68.4          | 69.0           | 69.2          |
| 70              | 70.0                     | 70.0          | 70.0          | 70.0           | 70.0          |
| 80              | 78.5                     | 72.8          | 71.6          | 71.0           | 70.8          |
| 90              | 87.1                     | 75.7          | 73.1          | 72.1           | 71.5          |
| 100             | 95.6                     | 78.5          | 74.7          | 73.1           | 72.3          |
| 110             | 104.2                    | 81.4          | 76.3          | 74.2           | 73.0          |
| 120             | 112.7                    | 84.2          | 77.9          | 75.2           | 73.8          |
| 130             | 121.3                    | 87.1          | 79.4          | 76.3           | 74.6          |
| 140             | 129.8                    | 89.9          | 81.0          | 77.3           | 75.3          |
| 150             | 138.3                    | 92.8          | 82.6          | 78.4           | 76.1          |
| 160             | 146.9                    | 95.6          | 84.2          | 79.4           | 76.9          |
| 170             | 155.4                    | 98.4          | 85.7          | 80.4           | 77.6          |
| 180             | 164.0                    | 101.3         | 87.3          | 81.5           | 78.4          |
| 190             | 172.5                    | 104.1         | 88.9          | 82.5           | 79.1          |
| 200             | 181.0                    | 107.0         | 90.5          | 83.6           | 79.9          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity. This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## ½" Uponor PEX heat loss at 90°F/32.2°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -9.5                  | -6.1          | -4.7          | -4.1           | -3.7          |
| 40              | -7.9                  | -5.1          | -4.0          | -3.4           | -3.1          |
| 50              | -6.3                  | -4.1          | -3.2          | -2.7           | -2.4          |
| 60              | -4.7                  | -3.0          | -2.4          | -2.0           | -1.8          |
| 70              | -3.2                  | -2.0          | -1.6          | -1.4           | -1.2          |
| 80              | -1.6                  | -1.0          | -0.8          | -0.7           | -0.6          |
| 90              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 100             | 1.6                   | 1.0           | 0.8           | 0.7            | 0.6           |
| 110             | 3.2                   | 2.0           | 1.6           | 1.4            | 1.2           |
| 120             | 4.7                   | 3.0           | 2.4           | 2.0            | 1.8           |
| 130             | 6.3                   | 4.1           | 3.2           | 2.7            | 2.4           |
| 140             | 7.9                   | 5.1           | 4.0           | 3.4            | 3.1           |
| 150             | 9.5                   | 6.1           | 4.7           | 4.1            | 3.7           |
| 160             | 11.1                  | 7.1           | 5.5           | 4.8            | 4.3           |
| 170             | 12.6                  | 8.1           | 6.3           | 5.4            | 4.9           |
| 180             | 14.2                  | 9.1           | 7.1           | 6.1            | 5.5           |
| 190             | 15.8                  | 10.1          | 7.9           | 6.8            | 6.1           |
| 200             | 17.4                  | 11.1          | 8.7           | 7.5            | 6.7           |

## ½" Uponor PEX surface temperature at 90°F/32.2°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 32.1                     | 75.7          | 83.1          | 85.7           | 87.0          |
| 40              | 41.8                     | 78.1          | 84.2          | 86.4           | 87.5          |
| 50              | 51.4                     | 80.5          | 85.4          | 87.1           | 88.0          |
| 60              | 61.1                     | 82.9          | 86.5          | 87.9           | 88.5          |
| 70              | 70.7                     | 85.2          | 87.7          | 88.6           | 89.0          |
| 80              | 80.4                     | 87.6          | 88.8          | 89.3           | 89.5          |
| 90              | 90.0                     | 90.0          | 90.0          | 90.0           | 90.0          |
| 100             | 99.6                     | 92.4          | 91.2          | 90.7           | 90.5          |
| 110             | 109.3                    | 94.8          | 92.3          | 91.4           | 91.0          |
| 120             | 118.9                    | 97.1          | 93.5          | 92.1           | 91.5          |
| 130             | 128.6                    | 99.5          | 94.6          | 92.9           | 92.0          |
| 140             | 138.2                    | 101.9         | 95.8          | 93.6           | 92.5          |
| 150             | 147.9                    | 104.3         | 96.9          | 94.3           | 93.0          |
| 160             | 157.5                    | 106.7         | 98.1          | 95.0           | 93.5          |
| 170             | 167.2                    | 109.0         | 99.2          | 95.7           | 94.0          |
| 180             | 176.8                    | 111.4         | 100.4         | 96.4           | 94.5          |
| 190             | 186.5                    | 113.8         | 101.5         | 97.2           | 95.1          |
| 200             | 196.1                    | 116.2         | 102.7         | 97.9           | 95.6          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## ¾" Uponor PEX heat loss at 90°F/32.2°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -13.1                 | -7.4          | -5.6          | -4.8           | -4.3          |
| 40              | -10.9                 | -6.2          | -4.7          | -4.0           | -3.5          |
| 50              | -8.7                  | -5.0          | -3.8          | -3.2           | -2.8          |
| 60              | -6.6                  | -3.7          | -2.8          | -2.4           | -2.1          |
| 70              | -4.4                  | -2.5          | -1.9          | -1.6           | -1.4          |
| 80              | -2.2                  | -1.2          | -0.9          | -0.8           | -0.7          |
| 90              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 100             | 2.2                   | 1.2           | 0.9           | 0.8            | 0.7           |
| 110             | 4.4                   | 2.5           | 1.9           | 1.6            | 1.4           |
| 120             | 6.6                   | 3.7           | 2.8           | 2.4            | 2.1           |
| 130             | 8.7                   | 5.0           | 3.8           | 3.2            | 2.8           |
| 140             | 10.9                  | 6.2           | 4.7           | 4.0            | 3.5           |
| 150             | 13.1                  | 7.4           | 5.6           | 4.8            | 4.3           |
| 160             | 15.3                  | 8.7           | 6.6           | 5.6            | 5.0           |
| 170             | 17.5                  | 9.9           | 7.5           | 6.4            | 5.7           |
| 180             | 19.7                  | 11.2          | 8.5           | 7.2            | 6.4           |
| 190             | 21.9                  | 12.4          | 9.4           | 8.0            | 7.1           |
| 200             | 24.0                  | 13.6          | 10.4          | 8.8            | 7.8           |

## ¾" Uponor PEX surface temperature at 90°F/32.2°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 32.7                     | 74.9          | 82.5          | 85.3           | 86.7          |
| 40              | 42.3                     | 77.4          | 83.7          | 86.1           | 87.2          |
| 50              | 51.8                     | 79.9          | 85.0          | 86.9           | 87.8          |
| 60              | 61.4                     | 82.4          | 86.2          | 87.6           | 88.3          |
| 70              | 70.9                     | 85.0          | 87.5          | 88.4           | 88.9          |
| 80              | 80.5                     | 87.5          | 88.7          | 89.2           | 89.4          |
| 90              | 90.0                     | 90.0          | 90.0          | 90.0           | 90.0          |
| 100             | 99.5                     | 92.5          | 91.3          | 90.8           | 90.6          |
| 110             | 109.1                    | 95.0          | 92.5          | 91.6           | 91.1          |
| 120             | 118.6                    | 97.6          | 93.8          | 92.4           | 91.7          |
| 130             | 128.2                    | 100.1         | 95.0          | 93.1           | 92.2          |
| 140             | 137.7                    | 102.6         | 96.3          | 93.9           | 92.8          |
| 150             | 147.3                    | 105.1         | 97.5          | 94.7           | 93.3          |
| 160             | 156.8                    | 107.7         | 98.8          | 95.5           | 93.9          |
| 170             | 166.3                    | 110.2         | 100.0         | 96.3           | 94.4          |
| 180             | 175.9                    | 112.7         | 101.3         | 97.1           | 95.0          |
| 190             | 185.4                    | 115.2         | 102.5         | 97.8           | 95.6          |
| 200             | 195.0                    | 117.8         | 103.8         | 98.6           | 96.1          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.



# Pipe heat loss and surface temperature

## 1" Uponor PEX heat loss at 90°F/32.2°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -16.6                 | -8.7          | -6.5          | -5.4           | -4.8          |
| 40              | -13.9                 | -7.3          | -5.4          | -4.5           | -4.0          |
| 50              | -11.1                 | -5.8          | -4.3          | -3.6           | -3.2          |
| 60              | -8.3                  | -4.4          | -3.2          | -2.7           | -2.4          |
| 70              | -5.5                  | -2.9          | -2.2          | -1.8           | -1.6          |
| 80              | -2.8                  | -1.5          | -1.1          | -0.9           | -0.8          |
| 90              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 100             | 2.8                   | 1.5           | 1.1           | 0.9            | 0.8           |
| 110             | 5.5                   | 2.9           | 2.2           | 1.8            | 1.6           |
| 120             | 8.3                   | 4.4           | 3.2           | 2.7            | 2.4           |
| 130             | 11.1                  | 5.8           | 4.3           | 3.6            | 3.2           |
| 140             | 13.9                  | 7.3           | 5.4           | 4.5            | 4.0           |
| 150             | 16.6                  | 8.7           | 6.5           | 5.4            | 4.8           |
| 160             | 19.4                  | 10.2          | 7.6           | 6.3            | 5.6           |
| 170             | 22.2                  | 11.7          | 8.7           | 7.2            | 6.4           |
| 180             | 25.0                  | 13.1          | 9.7           | 8.1            | 7.2           |
| 190             | 27.7                  | 14.6          | 10.8          | 9.0            | 8.0           |
| 200             | 30.5                  | 16.0          | 11.9          | 9.9            | 8.8           |

## 1" Uponor PEX surface temperature at 90°F/32.2°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 33.5                     | 74.3          | 82.1          | 85.0           | 86.4          |
| 40              | 42.9                     | 76.9          | 83.4          | 85.8           | 87.0          |
| 50              | 52.3                     | 79.5          | 84.7          | 86.7           | 87.6          |
| 60              | 61.7                     | 82.1          | 86.0          | 87.5           | 88.2          |
| 70              | 71.2                     | 84.8          | 87.4          | 88.3           | 88.8          |
| 80              | 80.6                     | 87.4          | 88.7          | 89.2           | 89.4          |
| 90              | 90.0                     | 90.0          | 90.0          | 90.0           | 90.0          |
| 100             | 99.4                     | 92.6          | 91.3          | 90.8           | 90.6          |
| 110             | 108.8                    | 95.2          | 92.6          | 91.7           | 91.2          |
| 120             | 118.3                    | 97.9          | 94.0          | 92.5           | 91.8          |
| 130             | 127.7                    | 100.5         | 95.3          | 93.3           | 92.4          |
| 140             | 137.1                    | 103.1         | 96.6          | 94.2           | 93.0          |
| 150             | 146.5                    | 105.7         | 97.9          | 95.0           | 93.6          |
| 160             | 155.9                    | 108.3         | 99.3          | 95.9           | 94.2          |
| 170             | 165.3                    | 110.9         | 100.6         | 96.7           | 94.8          |
| 180             | 174.8                    | 113.6         | 101.9         | 97.5           | 95.3          |
| 190             | 184.2                    | 116.2         | 103.2         | 98.4           | 95.9          |
| 200             | 193.6                    | 118.8         | 104.6         | 99.2           | 96.5          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## 1¼" Uponor PEX heat loss at 90°F/32.2°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -20.1                 | -10.0         | -7.3          | -6.0           | -5.3          |
| 40              | -16.7                 | -8.3          | -6.1          | -5.0           | -4.4          |
| 50              | -13.4                 | -6.7          | -4.9          | -4.0           | -3.5          |
| 60              | -10.0                 | -5.0          | -3.7          | -3.0           | -2.6          |
| 70              | -6.7                  | -3.3          | -2.4          | -2.0           | -1.8          |
| 80              | -3.3                  | -1.7          | -1.2          | -1.0           | -0.9          |
| 90              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 100             | 3.3                   | 1.7           | 1.2           | 1.0            | 0.9           |
| 110             | 6.7                   | 3.3           | 2.4           | 2.0            | 1.8           |
| 120             | 10.0                  | 5.0           | 3.7           | 3.0            | 2.6           |
| 130             | 13.4                  | 6.7           | 4.9           | 4.0            | 3.5           |
| 140             | 16.7                  | 8.3           | 6.1           | 5.0            | 4.4           |
| 150             | 20.1                  | 10.0          | 7.3           | 6.0            | 5.3           |
| 160             | 23.4                  | 11.7          | 8.5           | 7.1            | 6.2           |
| 170             | 26.8                  | 13.3          | 9.8           | 8.1            | 7.1           |
| 180             | 30.1                  | 15.0          | 11.0          | 9.1            | 7.9           |
| 190             | 33.5                  | 16.7          | 12.2          | 10.1           | 8.8           |
| 200             | 36.8                  | 18.4          | 13.4          | 11.1           | 9.7           |

## 1¼" Uponor PEX surface temperature at 90°F/32.2°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 34.2                     | 73.9          | 81.7          | 84.7           | 86.2          |
| 40              | 43.5                     | 76.6          | 83.1          | 85.6           | 86.9          |
| 50              | 52.8                     | 79.3          | 84.5          | 86.5           | 87.5          |
| 60              | 62.1                     | 81.9          | 85.9          | 87.4           | 88.1          |
| 70              | 71.4                     | 84.6          | 87.2          | 88.2           | 88.7          |
| 80              | 80.7                     | 87.3          | 88.6          | 89.1           | 89.4          |
| 90              | 90.0                     | 90.0          | 90.0          | 90.0           | 90.0          |
| 100             | 99.3                     | 92.7          | 91.4          | 90.9           | 90.6          |
| 110             | 108.6                    | 95.4          | 92.8          | 91.8           | 91.3          |
| 120             | 117.9                    | 98.1          | 94.1          | 92.6           | 91.9          |
| 130             | 127.2                    | 100.7         | 95.5          | 93.5           | 92.5          |
| 140             | 136.5                    | 103.4         | 96.9          | 94.4           | 93.1          |
| 150             | 145.8                    | 106.1         | 98.3          | 95.3           | 93.8          |
| 160             | 155.1                    | 108.8         | 99.7          | 96.2           | 94.4          |
| 170             | 164.4                    | 111.5         | 101.0         | 97.0           | 95.0          |
| 180             | 173.7                    | 114.2         | 102.4         | 97.9           | 95.6          |
| 190             | 183.0                    | 116.8         | 103.8         | 98.8           | 96.3          |
| 200             | 192.3                    | 119.5         | 105.2         | 99.7           | 96.9          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## 1½" Uponor PEX heat loss at 90°F/32.2°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -23.4                 | -11.3         | -8.1          | -6.6           | -5.8          |
| 40              | -19.5                 | -9.4          | -6.8          | -5.5           | -4.8          |
| 50              | -15.6                 | -7.5          | -5.4          | -4.4           | -3.9          |
| 60              | -11.7                 | -5.6          | -4.1          | -3.3           | -2.9          |
| 70              | -7.8                  | -3.8          | -2.7          | -2.2           | -1.9          |
| 80              | -3.9                  | -1.9          | -1.4          | -1.1           | -1.0          |
| 90              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 100             | 3.9                   | 1.9           | 1.4           | 1.1            | 1.0           |
| 110             | 7.8                   | 3.8           | 2.7           | 2.2            | 1.9           |
| 120             | 11.7                  | 5.6           | 4.1           | 3.3            | 2.9           |
| 130             | 15.6                  | 7.5           | 5.4           | 4.4            | 3.9           |
| 140             | 19.5                  | 9.4           | 6.8           | 5.5            | 4.8           |
| 150             | 23.4                  | 11.3          | 8.1           | 6.6            | 5.8           |
| 160             | 27.3                  | 13.1          | 9.5           | 7.8            | 6.7           |
| 170             | 31.2                  | 15.0          | 10.8          | 8.9            | 7.7           |
| 180             | 35.1                  | 16.9          | 12.2          | 10.0           | 8.7           |
| 190             | 39.0                  | 18.8          | 13.5          | 11.1           | 9.6           |
| 200             | 43.0                  | 20.6          | 14.9          | 12.2           | 10.6          |

## 1½" Uponor PEX surface temperature at 90°F/32.2°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 34.9                     | 73.6          | 81.4          | 84.5           | 86.1          |
| 40              | 44.1                     | 76.3          | 82.9          | 85.4           | 86.7          |
| 50              | 53.3                     | 79.1          | 84.3          | 86.3           | 87.4          |
| 60              | 62.5                     | 81.8          | 85.7          | 87.3           | 88.0          |
| 70              | 71.6                     | 84.5          | 87.1          | 88.2           | 88.7          |
| 80              | 80.8                     | 87.3          | 88.6          | 89.1           | 89.3          |
| 90              | 90.0                     | 90.0          | 90.0          | 90.0           | 90.0          |
| 100             | 99.2                     | 92.7          | 91.4          | 90.9           | 90.7          |
| 110             | 108.4                    | 95.5          | 92.9          | 91.8           | 91.3          |
| 120             | 117.5                    | 98.2          | 94.3          | 92.7           | 92.0          |
| 130             | 126.7                    | 100.9         | 95.7          | 93.7           | 92.6          |
| 140             | 135.9                    | 103.7         | 97.1          | 94.6           | 93.3          |
| 150             | 145.1                    | 106.4         | 98.6          | 95.5           | 93.9          |
| 160             | 154.2                    | 109.1         | 100.0         | 96.4           | 94.6          |
| 170             | 163.4                    | 111.8         | 101.4         | 97.3           | 95.2          |
| 180             | 172.6                    | 114.6         | 102.8         | 98.2           | 95.9          |
| 190             | 181.8                    | 117.3         | 104.3         | 99.1           | 96.5          |
| 200             | 191.0                    | 120.0         | 105.7         | 100.1          | 97.2          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## 2" Uponor PEX heat loss at 90°F/32.2°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -29.9                 | -13.7         | -9.7          | -7.8           | -6.7          |
| 40              | -24.9                 | -11.4         | -8.1          | -6.5           | -5.6          |
| 50              | -19.9                 | -9.1          | -6.4          | -5.2           | -4.5          |
| 60              | -14.9                 | -6.9          | -4.8          | -3.9           | -3.4          |
| 70              | -10.0                 | -4.6          | -3.2          | -2.6           | -2.2          |
| 80              | -5.0                  | -2.3          | -1.6          | -1.3           | -1.1          |
| 90              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 100             | 5.0                   | 2.3           | 1.6           | 1.3            | 1.1           |
| 110             | 10.0                  | 4.6           | 3.2           | 2.6            | 2.2           |
| 120             | 14.9                  | 6.9           | 4.8           | 3.9            | 3.4           |
| 130             | 19.9                  | 9.1           | 6.4           | 5.2            | 4.5           |
| 140             | 24.9                  | 11.4          | 8.1           | 6.5            | 5.6           |
| 150             | 29.9                  | 13.7          | 9.7           | 7.8            | 6.7           |
| 160             | 34.9                  | 16.0          | 11.3          | 9.1            | 7.8           |
| 170             | 39.9                  | 18.3          | 12.9          | 10.4           | 9.0           |
| 180             | 44.8                  | 20.6          | 14.5          | 11.7           | 10.1          |
| 190             | 49.8                  | 22.8          | 16.1          | 13.0           | 11.2          |
| 200             | 54.8                  | 25.1          | 17.7          | 14.3           | 12.3          |

## 2" Uponor PEX surface temperature at 90°F/32.2°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 36.3                     | 73.2          | 81.0          | 84.2           | 85.8          |
| 40              | 45.2                     | 76.0          | 82.5          | 85.1           | 86.5          |
| 50              | 54.2                     | 78.8          | 84.0          | 86.1           | 87.2          |
| 60              | 63.1                     | 81.6          | 85.5          | 87.1           | 87.9          |
| 70              | 72.1                     | 84.4          | 87.0          | 88.1           | 88.6          |
| 80              | 81.0                     | 87.2          | 88.5          | 89.0           | 89.3          |
| 90              | 90.0                     | 90.0          | 90.0          | 90.0           | 90.0          |
| 100             | 99.0                     | 92.8          | 91.5          | 91.0           | 90.7          |
| 110             | 107.9                    | 95.6          | 93.0          | 91.9           | 91.4          |
| 120             | 116.9                    | 98.4          | 94.5          | 92.9           | 92.1          |
| 130             | 125.8                    | 101.2         | 96.0          | 93.9           | 92.8          |
| 140             | 134.8                    | 104.0         | 97.5          | 94.9           | 93.5          |
| 150             | 143.7                    | 106.8         | 99.0          | 95.8           | 94.2          |
| 160             | 152.7                    | 109.5         | 100.5         | 96.8           | 94.9          |
| 170             | 161.7                    | 112.3         | 101.9         | 97.8           | 95.6          |
| 180             | 170.6                    | 115.1         | 103.4         | 98.7           | 96.3          |
| 190             | 179.6                    | 117.9         | 104.9         | 99.7           | 97.0          |
| 200             | 188.5                    | 120.7         | 106.4         | 100.7          | 97.7          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## 2½" Uponor PEX heat loss at 90°F/32.2°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -36.0                 | -16.1         | -11.2         | -8.9           | -7.6          |
| 40              | -30.0                 | -13.4         | -9.3          | -7.5           | -6.4          |
| 50              | -24.0                 | -10.7         | -7.5          | -6.0           | -5.1          |
| 60              | -18.0                 | -8.0          | -5.6          | -4.5           | -3.8          |
| 70              | -12.0                 | -5.4          | -3.7          | -3.0           | -2.5          |
| 80              | -6.0                  | -2.7          | -1.9          | -1.5           | -1.3          |
| 90              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 100             | 6.0                   | 2.7           | 1.9           | 1.5            | 1.3           |
| 110             | 12.0                  | 5.4           | 3.7           | 3.0            | 2.5           |
| 120             | 18.0                  | 8.0           | 5.6           | 4.5            | 3.8           |
| 130             | 24.0                  | 10.7          | 7.5           | 6.0            | 5.1           |
| 140             | 30.0                  | 13.4          | 9.3           | 7.5            | 6.4           |
| 150             | 36.0                  | 16.1          | 11.2          | 8.9            | 7.6           |
| 160             | 42.0                  | 18.8          | 13.1          | 10.4           | 8.9           |
| 170             | 48.0                  | 21.5          | 14.9          | 11.9           | 10.2          |
| 180             | 54.1                  | 24.1          | 16.8          | 13.4           | 11.5          |
| 190             | 60.1                  | 26.8          | 18.6          | 14.9           | 12.7          |
| 200             | 66.1                  | 29.5          | 20.5          | 16.4           | 14.0          |

## 2½" Uponor PEX surface temperature at 90°F/32.2°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 37.6                     | 73.0          | 80.8          | 83.9           | 85.6          |
| 40              | 46.3                     | 75.9          | 82.3          | 84.9           | 86.3          |
| 50              | 55.0                     | 78.7          | 83.8          | 86.0           | 87.1          |
| 60              | 63.8                     | 81.5          | 85.4          | 87.0           | 87.8          |
| 70              | 72.5                     | 84.3          | 86.9          | 88.0           | 88.5          |
| 80              | 81.3                     | 87.2          | 88.5          | 89.0           | 89.3          |
| 90              | 90.0                     | 90.0          | 90.0          | 90.0           | 90.0          |
| 100             | 98.7                     | 92.8          | 91.5          | 91.0           | 90.7          |
| 110             | 107.5                    | 95.7          | 93.1          | 92.0           | 91.5          |
| 120             | 116.2                    | 98.5          | 94.6          | 93.0           | 92.2          |
| 130             | 125.0                    | 101.3         | 96.2          | 94.0           | 92.9          |
| 140             | 133.7                    | 104.1         | 97.7          | 95.1           | 93.7          |
| 150             | 142.4                    | 107.0         | 99.2          | 96.1           | 94.4          |
| 160             | 151.2                    | 109.8         | 100.8         | 97.1           | 95.1          |
| 170             | 159.9                    | 112.6         | 102.3         | 98.1           | 95.9          |
| 180             | 168.7                    | 115.4         | 103.9         | 99.1           | 96.6          |
| 190             | 177.4                    | 118.3         | 105.4         | 100.1          | 97.3          |
| 200             | 186.1                    | 121.1         | 106.9         | 101.1          | 98.1          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.

# Pipe heat loss and surface temperature

## 3" Uponor PEX-a heat loss at 90°F/32.2°C ambient

| Water temp (°F) | Heat loss (btu/hr·ft) |               |               |                |               |
|-----------------|-----------------------|---------------|---------------|----------------|---------------|
|                 | No insulation         | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | -41.9                 | -18.4         | -12.7         | -10.0          | -8.5          |
| 40              | -34.9                 | -15.4         | -10.6         | -8.4           | -7.1          |
| 50              | -28.0                 | -12.3         | -8.5          | -6.7           | -5.7          |
| 60              | -21.0                 | -9.2          | -6.3          | -5.0           | -4.3          |
| 70              | -14.0                 | -6.1          | -4.2          | -3.3           | -2.8          |
| 80              | -7.0                  | -3.1          | -2.1          | -1.7           | -1.4          |
| 90              | 0.0                   | 0.0           | 0.0           | 0.0            | 0.0           |
| 100             | 7.0                   | 3.1           | 2.1           | 1.7            | 1.4           |
| 110             | 14.0                  | 6.1           | 4.2           | 3.3            | 2.8           |
| 120             | 21.0                  | 9.2           | 6.3           | 5.0            | 4.3           |
| 130             | 28.0                  | 12.3          | 8.5           | 6.7            | 5.7           |
| 140             | 34.9                  | 15.4          | 10.6          | 8.4            | 7.1           |
| 150             | 41.9                  | 18.4          | 12.7          | 10.0           | 8.5           |
| 160             | 48.9                  | 21.5          | 14.8          | 11.7           | 9.9           |
| 170             | 55.9                  | 24.6          | 16.9          | 13.4           | 11.4          |
| 180             | 62.9                  | 27.6          | 19.0          | 15.1           | 12.8          |
| 190             | 69.9                  | 30.7          | 21.1          | 16.7           | 14.2          |
| 200             | 76.9                  | 33.8          | 23.2          | 18.4           | 15.6          |

## 3" Uponor PEX surface temperature at 90°F/32.2°C ambient

| Water temp (°F) | Surface temperature (°F) |               |               |                |               |
|-----------------|--------------------------|---------------|---------------|----------------|---------------|
|                 | No insulation            | ½" insulation | 1" insulation | 1½" insulation | 2" insulation |
| 30              | 38.7                     | 72.9          | 80.6          | 83.7           | 85.4          |
| 40              | 47.3                     | 75.8          | 82.1          | 84.8           | 86.2          |
| 50              | 55.8                     | 78.6          | 83.7          | 85.8           | 87.0          |
| 60              | 64.4                     | 81.5          | 85.3          | 86.9           | 87.7          |
| 70              | 72.9                     | 84.3          | 86.9          | 87.9           | 88.5          |
| 80              | 81.5                     | 87.2          | 88.4          | 89.0           | 89.2          |
| 90              | 90.0                     | 90.0          | 90.0          | 90.0           | 90.0          |
| 100             | 98.5                     | 92.8          | 91.6          | 91.0           | 90.8          |
| 110             | 107.1                    | 95.7          | 93.1          | 92.1           | 91.5          |
| 120             | 115.6                    | 98.5          | 94.7          | 93.1           | 92.3          |
| 130             | 124.2                    | 101.4         | 96.3          | 94.2           | 93.0          |
| 140             | 132.7                    | 104.2         | 97.9          | 95.2           | 93.8          |
| 150             | 141.3                    | 107.1         | 99.4          | 96.3           | 94.6          |
| 160             | 149.8                    | 109.9         | 101.0         | 97.3           | 95.3          |
| 170             | 158.3                    | 112.8         | 102.6         | 98.4           | 96.1          |
| 180             | 166.9                    | 115.6         | 104.2         | 99.4           | 96.9          |
| 190             | 175.4                    | 118.4         | 105.7         | 100.4          | 97.6          |
| 200             | 184.0                    | 121.3         | 107.3         | 101.5          | 98.4          |

1. All calculations based on cylindrical thermal resistance methodology (ASHRAE).
2. Based on fluid velocity of 8 ft./sec. at 160°F/71.1°C (maximizing heat transfer from 100% water).
3. Pipe convection set to be 1.761 Btu/hr·ft²·°F (based on standard value for free convection of air).
4. This heat loss comparison uses 0.24 Btu·in/(hr·ft²·°F) as the insulation thermal conductivity.  
This is a standard value for fiberglass pipe insulation at a 100°F/37.8°C mean temperature.





**Uponor Inc.**  
5925 148th Street West  
Apple Valley, MN 55124  
USA

T 800.321.4739  
F 952.891.2008

**Uponor Ltd.**  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
CANADA

T 888.994.7726  
F 800.638.9517

**uponor**