

### Features

- Two-way diverter valve
- Diverter valve code-approved for backflow protection
- 15 gpm (57 lpm) flow rate using 1/2" high-flow valves
- Handshower sold separately
- Coordinates with Components faucets, accessories, and showering components to complete your bathroom

### Material

- Brass
- KOHLER® finishes resist corrosion and tarnishing

### Installation


- Deck- or bath-mount

### Recommended Products/Accessories

K-72421-G Three-function handshower, 1.75 gpm  
K-22165-G Four-function handshower, 1.75 gpm  
K-22166-G Four-function handshower, 1.75 gpm  
79583 Roughing-in Kit for Deck-Mount Handshowers  
K-23723 Faucet cleaner

### Included Components

GP78825 Polished Chrome hose kit



### Codes/Standards





ASME A112.18.1/CSA B125.1


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	TT	Vibrant Titanium

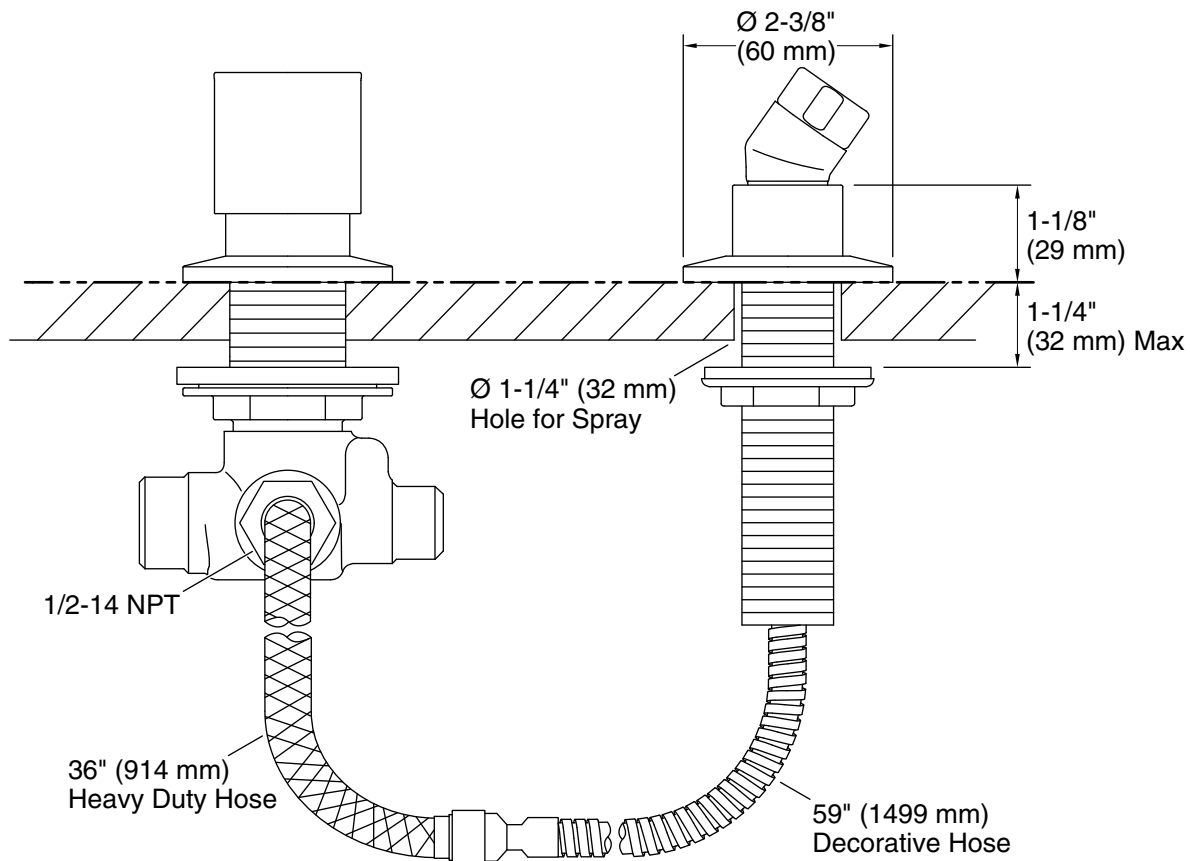

### Technical Information

All product dimensions are nominal.

#### Shower Valve:

Flow Rate (Max) @ 45 psi	15 gal/min (56.8 l/min)
Pressure:	45 psi (3.1 bar)
Maximum (Static) Pressure:	125 psi (8.6 bar)
Drain included:	No

### Notes

Install this product according to the installation instructions.