

# 4-Way Cassette Heat Pump Ductless System

Indoor Model: **D5FSCAH24XAK**


Job Data:

Tag #:


Date:

Location:

Carrier#:

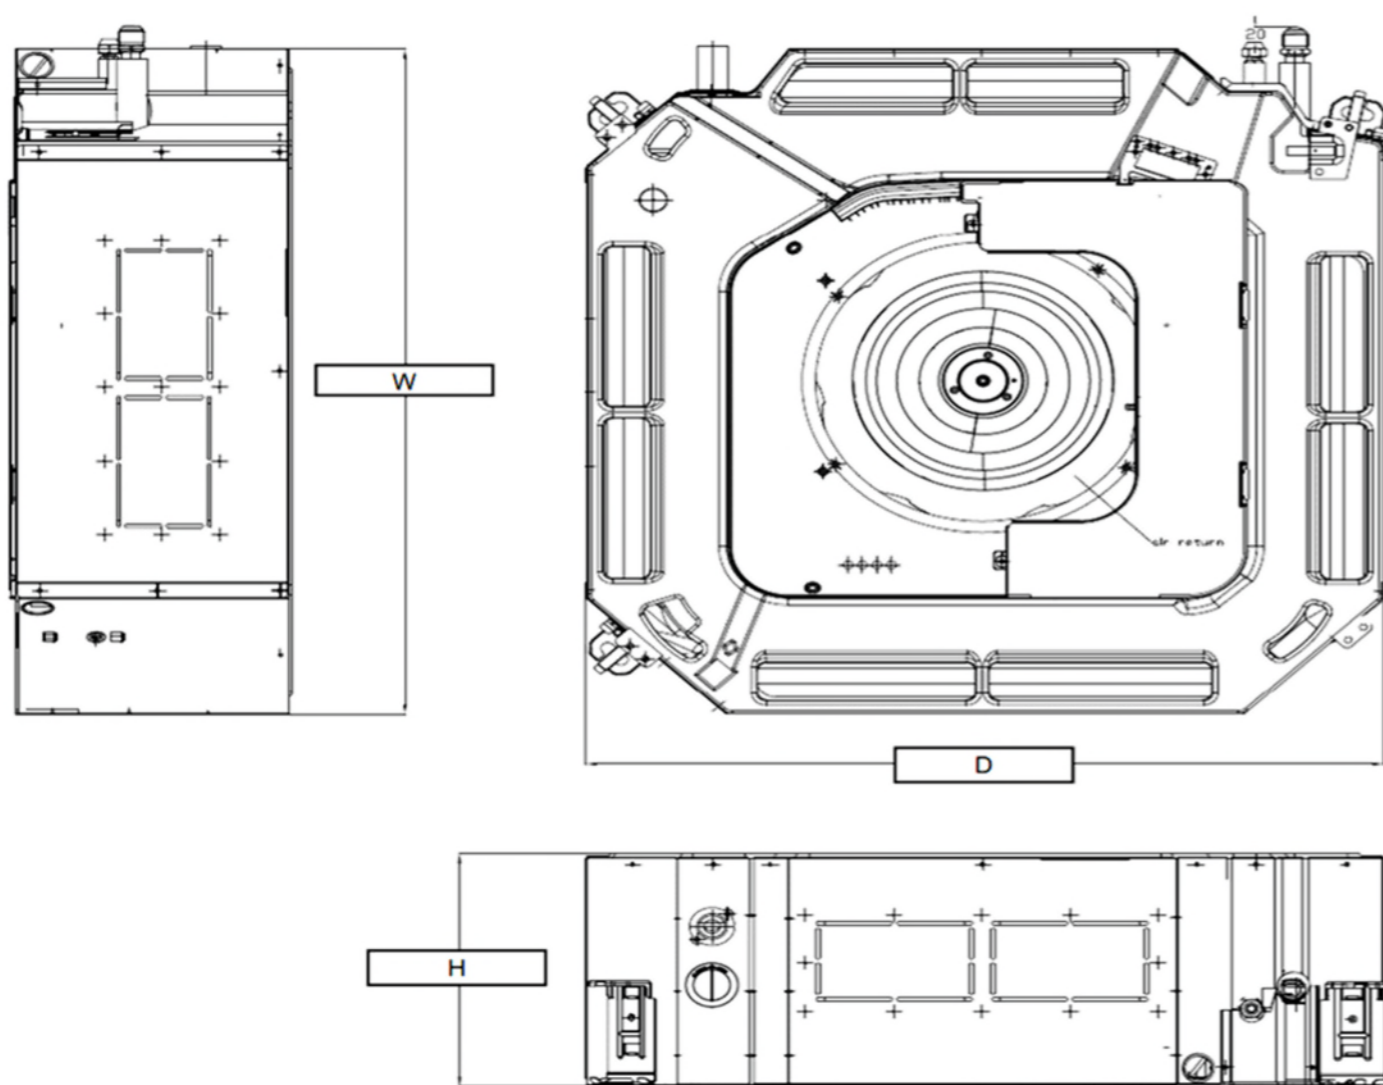

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
12K/18K	mm	570	570	245
	inch	22.44	22.44	9.65
24K	mm	830	830	205
	inch	32.68	32.68	8.07

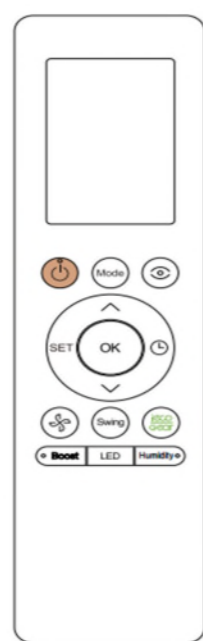

## INDOOR STANDARD FEATURES

- Modes: Cool, Heat, Dry, Fan, Auto
- Outside Air Intake
- Four fan speeds
- Sleep Mode
- Built-in condensate lift pump
- Follow Me (senses temperature at handheld remote)
- Auto-Restart function
- Quiet indoor operation
- Anti-corrosive fin coating
- Ceiling Grille

## RESIDENTIAL APPLICATION LIMITED WARRANTY\*

- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

D5FSCAH24XAK			
<b>System</b>	Indoor Model #	D5FSCAH24XAK	
	Indoor Size	24000	
<b>Electrical</b>	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	3
<b>Operating Range</b>	Cooling Indoor DB Min - Max	°F(°C)	60~90 (16~32)
	Heating Indoor DB Min - Max	°F(°C)	32~86 (0~30)
<b>Indoor Coil</b>	Face Area	Sq. Ft.	3.86
	No. Rows	2	
	Fins per inch	20	
	Circuits	4	
<b>Indoor Unit</b>	Number of Fan Speeds	624/568/426	
	Airflow (highest to lowest)	CFM	706.30/635.67/547.38
	Sound Pressure (highest to lowest)	dB(A)	45.0/42.5/33.5/29.5
	Moisture Removal	L/h	2.36
	Air Throw Data	ft(m)	13.12(4)
<b>Dimensions</b>	Body Height	in (mm)	8.07(205)
	Body Width	in (mm)	32.68(830)
	Body Depth	in (mm)	32.68(830)
	Body Net Weight	lbs (kg)	47.18(21.4)
	Panel Height	in (mm)	1.969(50)
	Panel Width	in (mm)	37.40(950)
	Panel Depth	in (mm)	37.40(950)
	Shipping Height	in (mm)	9.84(250)
	Shipping Width	in (mm)	35.83(910)
	Shipping Depth	in (mm)	35.83(910)
Shipping Net Weight	lbs (kg)	59.08(26.8)	
<b>CONTROLS</b>			
<b>Standard</b>	Wireless Remote Controller (°F/°C Convertible)		
<b>Required</b>	Cassette Panel	KSALG0203AAA	
<b>Optional</b>	Wired Remote Control 7 Day Programmable	KSACN1401AAA	
	Wired Remote Control with Timer Function	KSACN1201AAA	
	Wi-Fi™ Kit High Wall	KSAIF0701AAA	
	24V Mini Interface	KSAIC0601230	