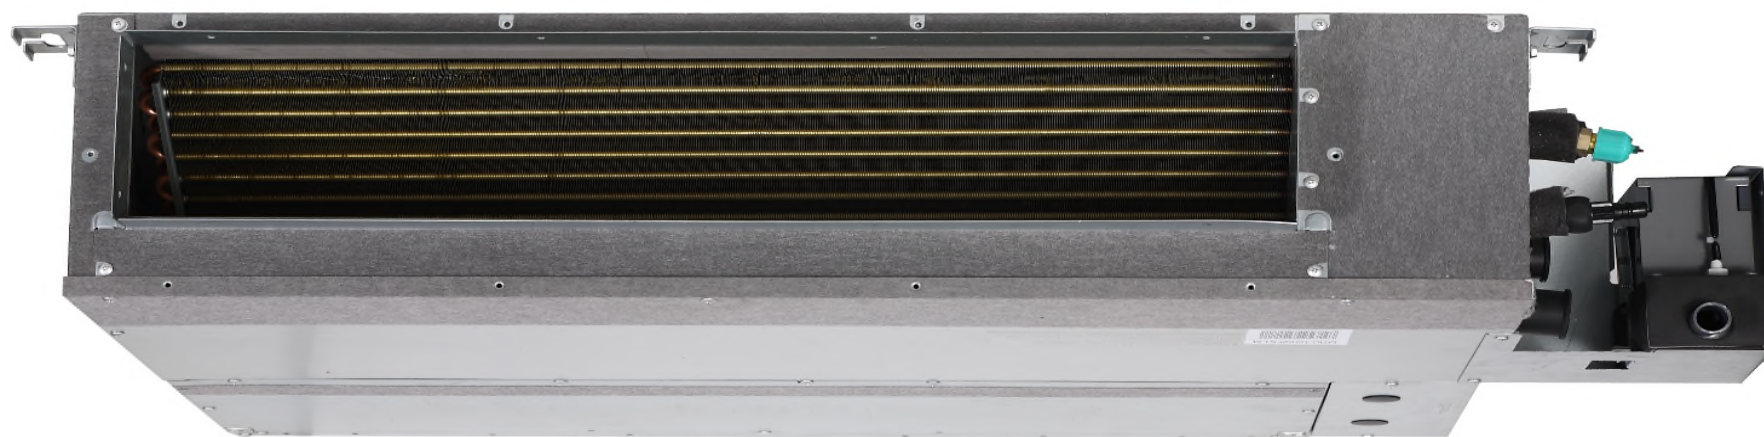


Indoor Model: D5FSDAH06XAK

Job Data:

Location: _____



Tag #: _____

Carrier#:Date: _____

- Modes: Cool, Heat, Dry, Fan, Auto
- Vertical or Horizontal Installation
- Rear or Bottom Return
- Outside Air Intake
- Condensate Lift pump shipped with the unit
- Follow Me (senses temperature at handheld remote)
- Auto-Restart function
- Quiet indoor operation
- Anti-corrosive fin coating

• Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

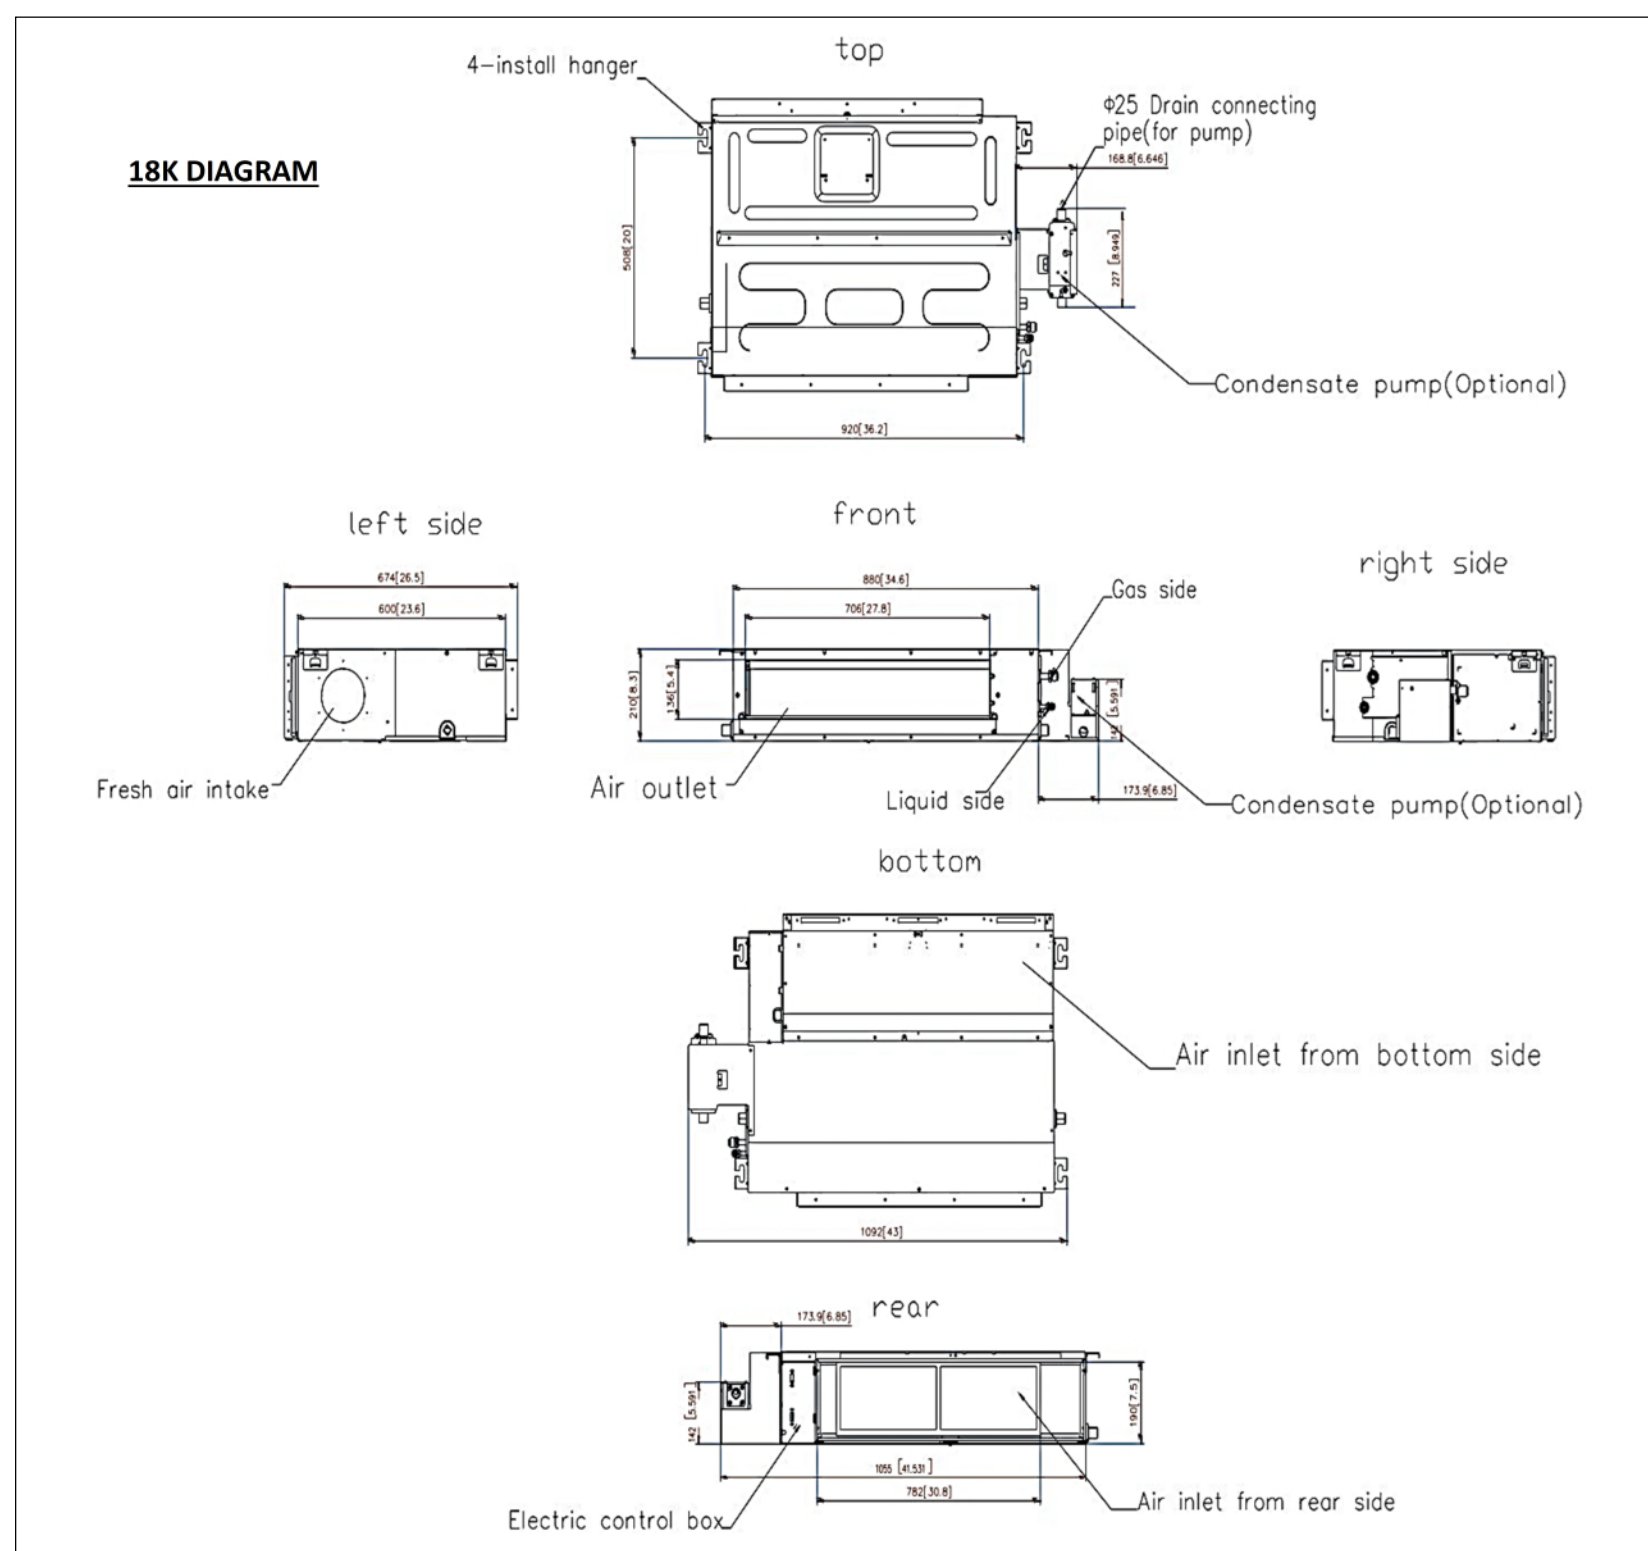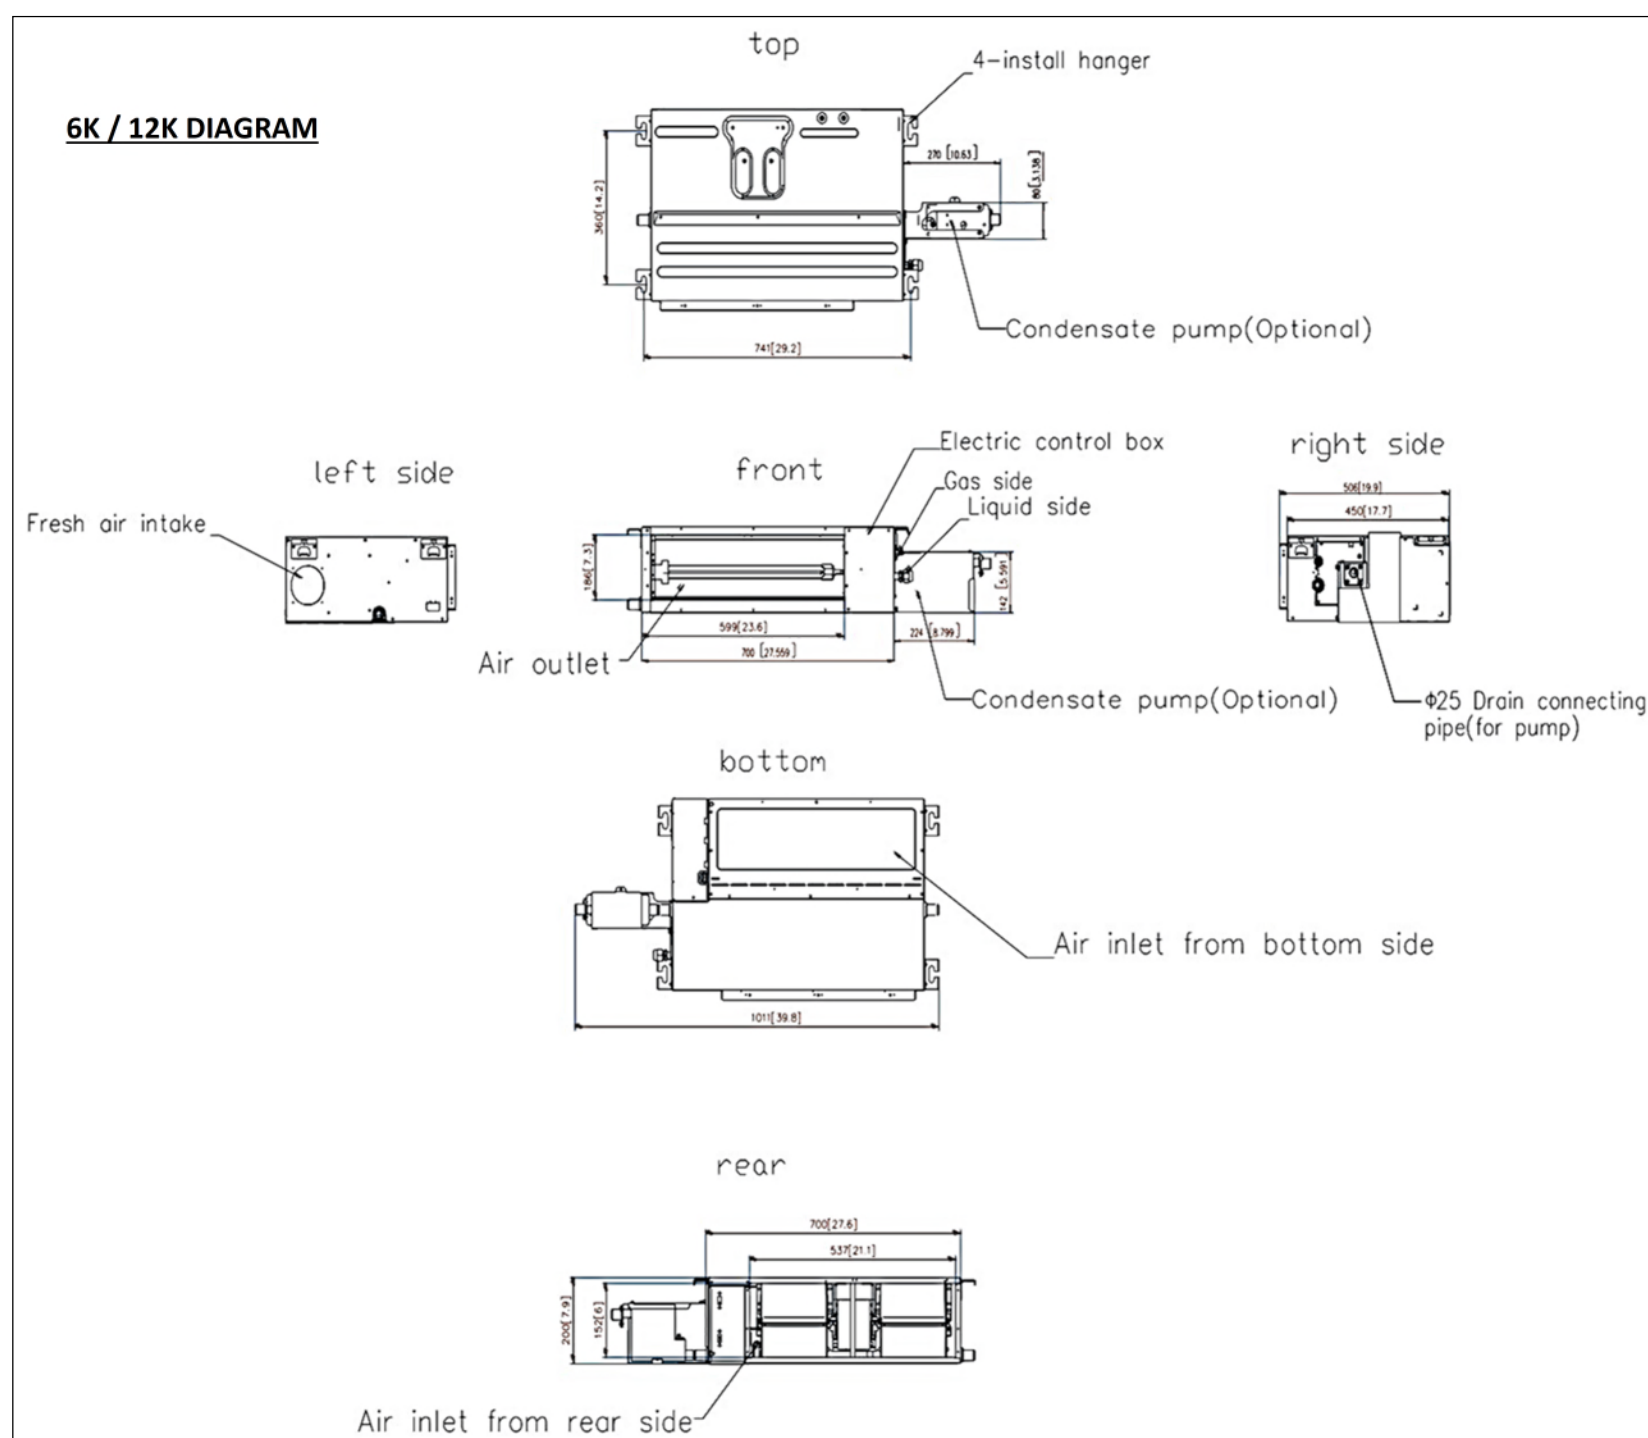

D5FSDAH06XAK			
System	Indoor Model #		D5FSDAH06XAK
	Indoor Size		6000
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	3
Operating Range	Cooling Indoor DB Min - Max	°F(°C)	60~90 (16~32)
	Heating Indoor DB Min - Max	°F(°C)	32~86 (0~30)
Indoor Coil	Face Area	Sq. Ft.	1.19
	No. Rows		3
	Fins per inch		18
	Circuits		3
Indoor Unit	Number of Fan Speeds		980/910/840
	Airflow (highest to lowest)	CFM	323.73 / 264.87 / 206.01 / 147.15 / 117.72
	Sound Pressure (highest to lowest)	dB(A)	N\A/32.5/30.5/29.5/22
	Moisture Removal	L/h	NA
	Air Throw Data	ft(m)	NA
Dimensions	Height	in (mm)	7.87(200)
	Width	in (mm)	27.56(700)
	Depth	in (mm)	19.92(506)
	Net Weight	lbs (kg)	39.46(17.9)
	Shipping Height	in (mm)	10.83(275)
	Shipping Width	in (mm)	42.13(1070)
	Shipping Depth	in (mm)	21.26(540)
	Shipping Net Weight	lbs (kg)	46.74(21.2)
CONTROLS			
Standard	Wireless Remote Controller (°F/°C Convertible)		
	Wired Remote Control 7 Day Programmable		KSACN1401AAA
Optional	Wired Remote Control with Timer Function		KSACN1201AAA
	24V Mini Interface		KSAIC0601230

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
6K/12K	mm	700	506	200
	inch	27.56	19.92	7.87
18K	mm	880	674	210
	inch	34.65	26.54	8.27

