
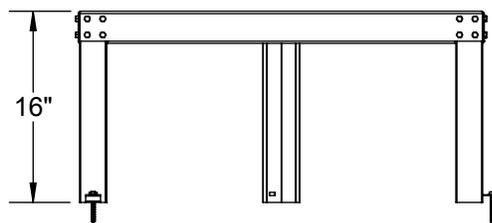
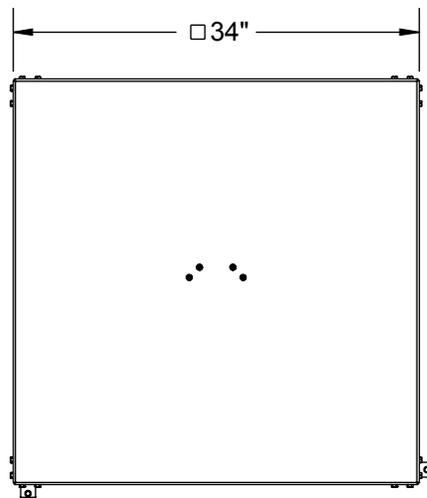


PRODUCT SPECIFICATION DRAWING
QUICKSTAND™ 34" X 34" (Water Heater & Equipment Support)
#40-S-34-U (unassembled)

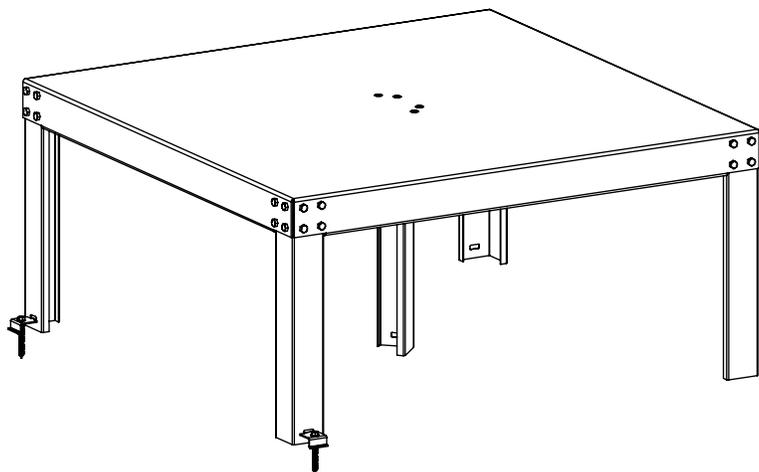

The QUICKSTAND™ #40-S-34-U stand safely elevates water heaters and other equipment above the floor (2,000 lbs rating).

ALL DIMENSIONS IN INCHES

Product Information:

- **Material & Hardware:**
 Top: 11GA CRS, Galvanized
 Attachment Bracket: 11GA CRS, Galvanized
 Leg: 16GA CRS, Galvanized, 5 places
 Safety Clip: 14GA CRS, Galvanized, 2 places
 Hex Bolt, #1/4-20 x 5/8"L, 36 places
 Screw, Machine, #1/4-20 X 5/8"L, SST, 100° Phillips Flat Head, 4 places
 Nut, Hex, #1/4-20, 40 places
 Washer, #1/4, External Tooth, Lock, 40 places
- Engineered and lab tested to meet Uniform Plumbing Code (UPC) and International Plumbing Code (IPC) requirements, including elevation of water heater's ignition source 18" above the floor
- Holds up to 2,000 pounds (typical 100 to 120 U.S. gallons plus)
- QUICKSTAND™ weight approximately 61 pounds without packaging
- Available in unassembled configuration ONLY

THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION.



CONVERTING MAKE-SHIFT MET-ODS INTO ENGINEERED SOLUTIONS™

800-321-0316 OR 760-744-6944 / FAX: 760-744-0507 / WWW.HOLDRITE.COM
 spec_40-S-34-U_RevA

Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	