

# KOHLER® Faucets

## Purist®

### Rite-Temp® bath and shower trim kit with push-button diverter and cross handle, 2.5 gpm K-T14420-3

#### Features

- Cross handle
- 35° spout
- Includes showerhead with arm and flange, nondiverter spout with NPT connection, and faceplate with handle and push-button diverter
- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- Coordinates with Purist faucets, accessories, and showering components to complete your bathroom

#### Material

- Premium material construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

#### Installation

- Trim only; requires valve to complete installation (sold separately)

#### Required Products/Accessories

K-11748 Series Rite-Temp® Valves

#### Adapters, Rough-in and Extension Kits

1016154

88526

#### Optional Products/Accessories

88526 Thin Wall Trim Kit

1016154 Rite-Temp® Deep Rough-In



#### Codes/Standards

ASME A112.18.1/CSA B125.1










DOE - Energy Policy Act 1992

#### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	BGP	Brushed Graphite
	TT	Vibrant Titanium


1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

6-21-2025 01:05 - US/CA

THE BOLD LOOK  
OF **KOHLER®**

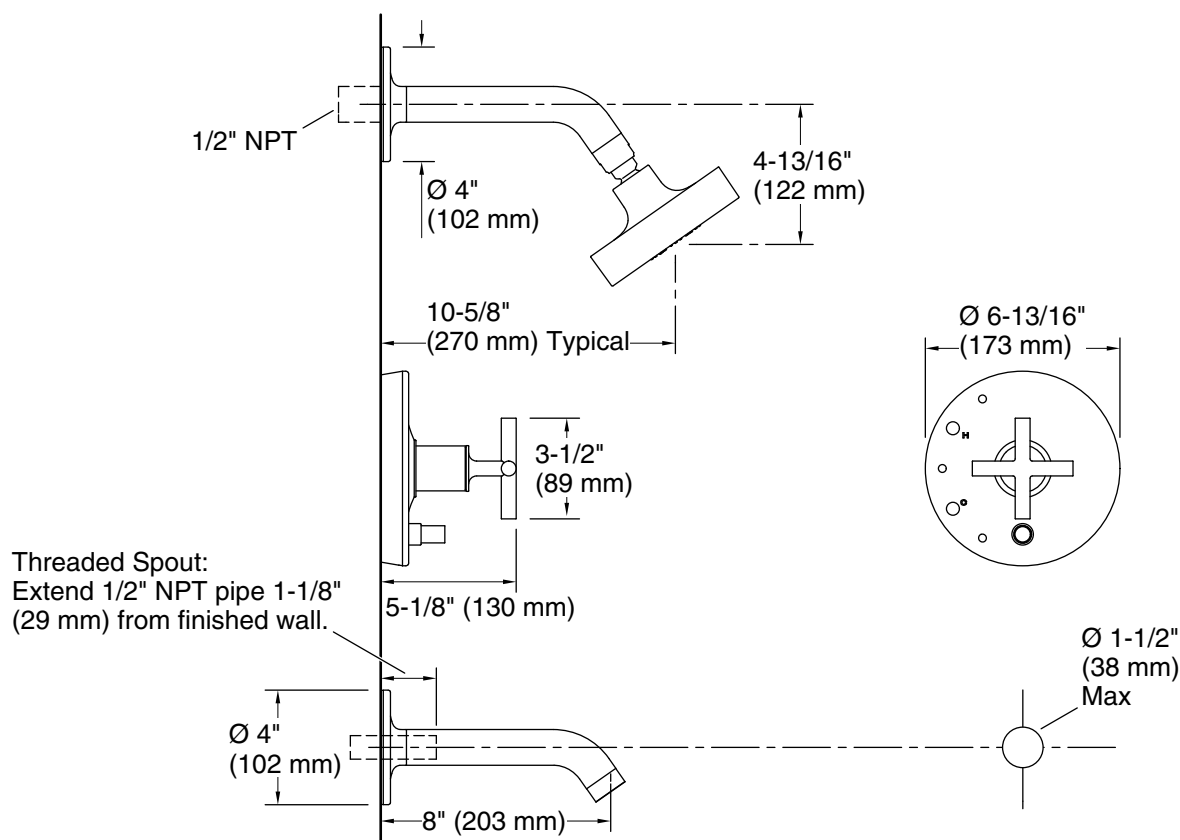

## Technical Information

All product dimensions are nominal.

### Spout:

Spout reach: 8" (204 mm)

Shower/Rainhead rated max flow: 2.5 gal/min (9.5 l/min)

## Notes

Install this product according to the installation guide.

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap the shower outlet if deck-mount spout, diverter, or handshower is connected to the spout outlet.