

Ceiling & Floor Heat Pump Ductless System

Indoor Model: D5FCFAH58XAK

Job Dat:

Location:

Tag #:


Carrier#:

Date:



- INDOOR STANDARD FEATURES
- Modes: Cool, Heat, Dry, Fan, Auto
 - Four fan speeds
 - Capable to be mounted on floor and ceiling
 - Turbo Mode
 - Active Clean (i-clean)
 - Follow Me (senses temperature at handheld remote)
 - Auto-Restart function
 - Quiet indoor operation
 - Anti-corrosive fin coating
 - Factory Pre- installed Leak Detection System
 - Pipe Connection Size - Liquid: 3/8in (9.52mm)
 - Pipe Connection Size - Suction: 3/4in (19mm)
- RESIDENTIAL APPLICATION LIMITED WARRANTY*
- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

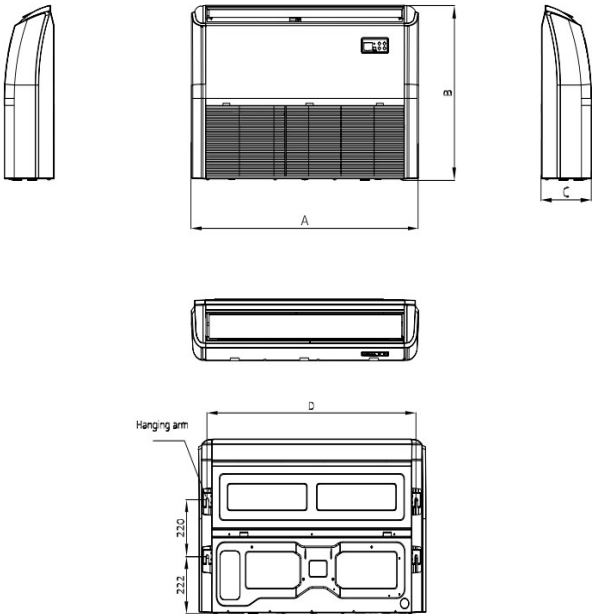

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
36K ~ 60K	in(mm)	64.96(1650)	26.57(675)	9.25(235)

Indoor - Heat Pump			
System	Indoor Model #		D5FCFAH58XAK
	Indoor Size		60000
Electrical	Voltage, Phase, Cycle		V/Ph/Hz 208-230/1/60
	Power Supply		Indoor unit powered by outdoor unit
	MCA		A. 3
Operating Range	Cooling Indoor DB Min - Max		°F(°C) 60~90(16 ~ 32)
	Heating Indoor DB Min - Max		°F(°C) 32~86(0 ~ 30)
Indoor Coil	Face Area		Sq. Ft. 8.08
	No. Rows		4
	Fins per inch		20
	Circuits		12
Indoor Unit	Number of Fan Speeds		1290/1180/960
	Airflow (highest to lowest)		CFM 1365.55 / 1236.06 / 1118.34 / 882.90 / 776.95
	Sound Pressure (highest to lowest)		dB(A) N/A/54.5/49.0/42.0/39.0
	Moisture Removal		L/h 7.16
Dimensions	Body Height		in (mm) 9.25(235)
	Body Width		in (mm) 64.96(1650)
	Body Depth		in (mm) 26.57(675)
	Body Net Weight		lbs (kg) 95.24(43.2)
	Shipping Height		in (mm) 12.13(308)
	Shipping Width		in (mm) 68.31(1735)
	Shipping Depth		in (mm) 29.92(760)
	Shipping Net Weight		lbs (kg) 111.33(50.50)

Accessories		
Standard	Wireless Remote Controller (*F/°C Convertible)	
Optional	Wired Remote Control 7 Day Programmable	KSACN1401AAA
	Wired Remote Control with Timer Function	KSACN1201AAA
	24V Mini Interface	KSAIC0601230



R-454B



R-454B



R-454B