



Composed[®] | K-181029-BC1

Touchless lavatory faucet and soap dispenser for Constellation[™] lavatory system, 0.5 gpm

Features

- Touchless faucet, soap dispenser, and accessory combination designed for Constellation[™] 30" wall-mount lavatory systems
- Faucet with Kinesis[®] technology and concealed sensor gives a clean aesthetic and provides extraordinarily accurate and reliable actuation in varying installation environments
- 0.5 gpm (1.9 lpm) maximum flow rate
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- Vandal-resistant aerator
- Soap dispenser possesses adjustable volume and sensor range for precise actuations
- Soap dispenser requires low (1-20 cps or gr/m-s) viscosity foam soap with no suspended particles. Please see Installation Guide or Maintenance and Use Guide for specific soap recommendations
- Below-counter faucet valving and soap dispenser reservoir reduce footprint and provide easier servicing
- Vandal-resistant sensor on soap dispenser delays dispensing for 30 seconds if blocked for ten seconds
- Above-counter low soap and low battery indicators
- Coordinating bag hook holds purses, backpacks, and other bags
- Includes assembled faucet and soap dispenser, bag hook, multi-outlet power supply, two 10' (3.1 m) cable assemblies, overflow assembly, 1-gallon bulk soap refill, mechanical mixing tee



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- BN Vibrant Brushed Nickel
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 12:0 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.

ADA

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
UL 1310
ADA
ICC/ANSI A117.1

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

Technical Information

All product dimensions are nominal.

Spout

Spout Reach: 5-13/16" (148 mm)

Flow Rate

Faucet Flow Rate: 0.5 gpm (1.9 l/min)

Valves

Included Valve: Thermostatic Mixer

Pressure/Fixture Supply Requirements

Minimum Flow Rate: 0.5 gpm (1.9 l/min)

Material

- Durable brass construction
-

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

110/220 V, 50/60 Hz




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 12:0 - US-CA

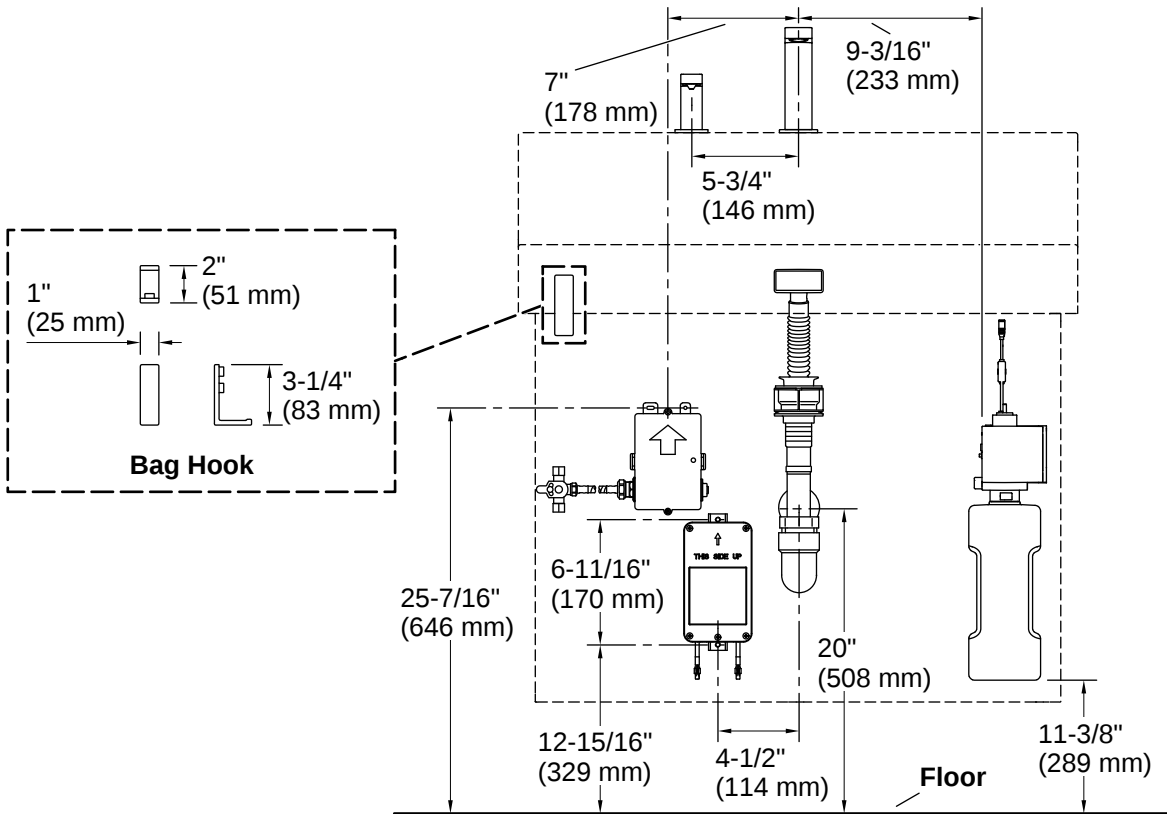

Installation

- Deck-mount

Installation Notes

Install this product according to the installation instructions.

For installations requiring ASSE 1070 compliance, purchase the 99799 NA thermostatic mixing valve (sold separately). One thermostatic mixing valve is required per faucet.

ADA compliant when installed to the specific requirements of these regulations.

