



# Strayt™ | K-103S36-SANA

Touchless single-hole lavatory faucet with Kinesis® sensor technology, 0.5 gpm

## Features

- Kinesis® technology with concealed sensor allows for a clean aesthetic and provides extraordinarily accurate and reliable actuation in varying installation environments
- Below-counter valving reduces the faucet footprint and provides easier service
- Design-forward aesthetic for commercial bathroom spaces
- 0.5 gpm (1.9 lpm) maximum flow rate
- Requires battery, plug-in AC power, or Hybrid Energy System (each sold separately)
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- Vandal-resistant aerator
- 18" (457 mm) stainless steel braided flexible supply hose for easy installation
- Grid drain
- Concealed mechanical mixer sold separately
- Complies with the Safe Drinking Water Act (SDWA)
- Box includes: Spout assembly, grid drain, control box assembly, supply hose, and standard mounting hardware



## Available Colors/Finishes

*Color tiles intended for reference only.*

|     |                               |
|-----|-------------------------------|
| CP  | Polished Chrome               |
| BN  | Vibrant Brushed Nickel        |
| BL  | Matte Black                   |
| 2MB | Vibrant Brushed Moderne Brass |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

7-07-2026 13:01 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

*ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.*

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 372  
NSF/ANSI/CAN 61  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

## Technology

- Kinesis® sensor technology offers on-demand detection for maximum water savings

## Warranty

*See website for detailed warranty information.*

KOHLER® One-Year Limited Warranty

## Technical Information

*All product dimensions are nominal.*

### Spout

Spout Reach: 5-1/4" (133 mm)

### Flow Rate

Faucet Flow Rate: 0.5 gpm (1.9 l/min)

## Material

- Metal construction spout
- Cast brass valve

## Required Products/Accessories

- K-13480-A AC single supply, North American outlets

or

- K-13481-A Multi-outlet power supply, North American outlets

or

- 1359812 Dc Power Unit

or

- 1377524 Powercell Assembly




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

7-07-2026 13:01 - US-CA

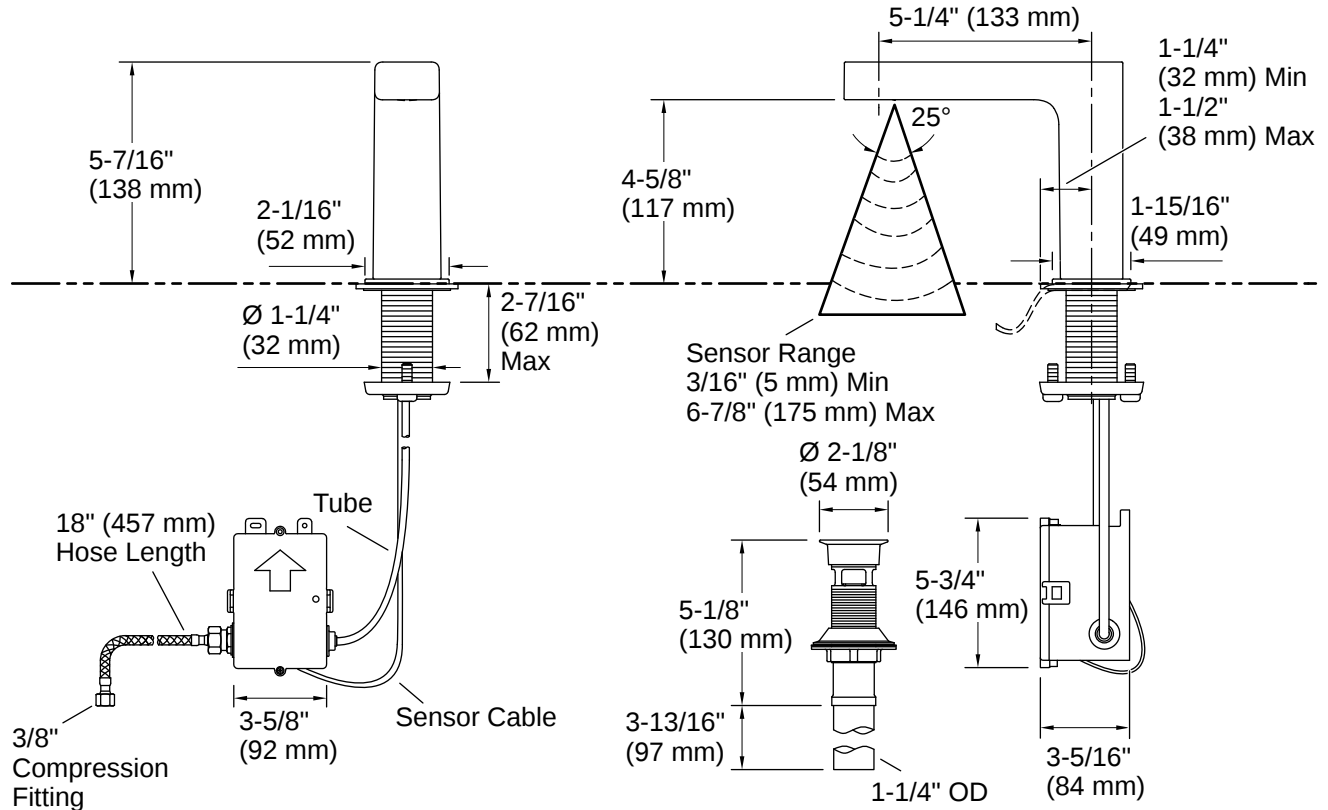

## Installation

- Single-hole mounting

## Installation Notes

*Install this product according to the installation instructions.*

A 1-1/4" (32 mm) minimum to 1-1/2" (38 mm) maximum diameter mounting hole is required.

The minimum distance between the back of the faucet spout and the wall must be 1-3/4" (44 mm). This will allow proper clearance for setscrew access.

The maximum distance between the bathroom sink basin edge to the base of the faucet spout must be 1-3/4" (44 mm).

This product requires an AC power supply (not included).  
ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-07-2026 13:01 - US-CA