

TURN HVAC EYESORES INTO PROFITS!



* "Air leakage accounts for between 25 percent and 40 percent of the energy used for heating and cooling in a typical residence." **ENERGY STAR®**



Elevate Your HVAC Installs! Reputation • Differentiation • Profit



- ✓ Stops Costly Air Leakage
- ✓ Prevents Rodent & Bug Intrusion
- ✓ Protects Equipment Performance
- ✓ Isolates Piping for Vibration
- ✓ Noise Reduction



Stop Air
Leakage



Stops Water
Penetration



Pest & Rodent
Intrusion



UV Weather
Protection



Indoor
Air Quality



Isolates
Pipe Noise



Full Code
Compliance



Made in the USA



AIREX
TITANOUTLET™

760.343.2277 | www.AirexMfg.com

TITAN TRS OUTLET™

NOW With a 3/4" Thick Gasket

The **AIREX TITAN OUTLET™** makes sealing pipe wall penetrations a snap. Perfect for sealing anywhere on lap siding, deep grout brick walls, stucco and stone wall. Save time and labor. No more trying to cut and remount siding, installing mounting brackets or other laborous methods.

The **AIREX TITAN OUTLET™** engineered design gives every job a professional appearance. Sustainable gasket sealing against costly air leakage and preventing water penetration. Keeps out bug and rodent intrusion while supporting and isolating the piping from vibration.

- Prevents Expansion and Contraction
- Superior Weather & UV Resistance
UL F1 Construction
- Permanent Support for Refrigeration Pipe



New 3/4" Gasket
Perfect For Sealing Lap Siding, Masonry & Stucco

TITAN OUTLET APPROVED PERFORMANCE TESTING

ASTM E 2178 Air Permeance of Building Material
ASTM D1525C Temperature Deformation Test
UL 746C Outdoor Suitability – Rating F1



EFLEXGUARD™



PROSYSTEMKIT™

TRS should be combined with **E-FLEX GUARD** to protect insulation energy savings. Available as **PRO-SYSTEM KIT**

Stucco, Masonry Applications

Model #	Suction Line Insulated	Both Lines Insulated Mini Splits - Heat Pumps	Diameter
TRS-550-G	(Fits: 1/2" wall thickness with 5/8", 3/4", 7/8" tube)	3/8" Wall Insulation Thickness	1.70" (4cm)
TRS-575-G	(Fits: 3/4" wall thickness with 5/8", 3/4", 7/8" tube)	1/2" Wall Insulation Thickness	2.38" (6cm)
TRS-510-G	(Fits: 1" wall thickness with 3/4", 7/8" tube or 3/4" wall thickness pipe insulation with 1-1/8" tube)	3/4" Wall Insulation Thickness	3.19" (8cm)


PROSYSTEM KIT TRS MODELS

Stucco, Masonry Applications

G-Gray W-White

Recommended Sizing Chart

Model #	Suction Line Insulated	Both Lines Insulated Mini Splits - Heat Pumps	Diameter
TRS650G-72EB	(Fits: 1/2" wall thickness with 5/8", 3/4", 7/8" tube)	3/8" Wall Insulation Thickness	1.70" (4cm)
TRS675G-72CB	(Fits: 3/4" wall thickness with 5/8", 3/4", 7/8" tube)	1/2" Wall Insulation Thickness	2.38" (6cm)
TRS610G-72XB	(Fits: 1" wall thickness with 5/8", 3/4", 7/8" tube or 3/4" wall thickness pipe insulation with 1-1/8" tube)	3/4" Wall Insulation Thickness	3.19" (8cm)

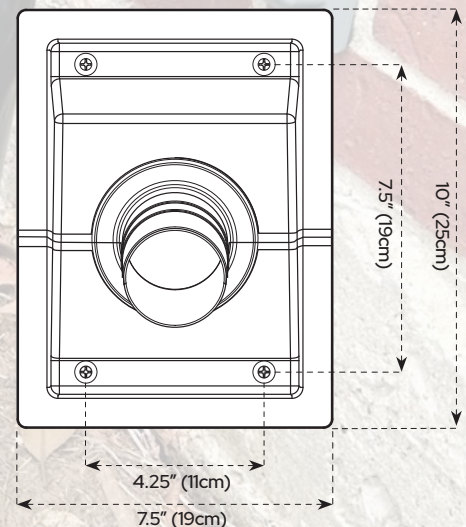

*ENERGY STAR® Air Leakage 2006



Made in the USA



B-Black W-White

customerservice@airexmfg.com

