

► Code Number

3915503

► Description

Concealed Hydraulically Operated Urinal Flushometer, for 3/4" back spud urinals.

► Flush Cycle

3.5 gpf/13.2 lpf

► Specifications

Quiet, Concealed, Diaphragm Type, Rough Brass Urinal Flushometer for either left or right hand supply with the following features:

- ADA Compliant Non-Hold-Open feature type Actuator (not included, order separately-specify Actuator type listed below)
- 3/4" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Elbow Flush Connection and Spud Coupling for 3/4" Concealed Back Spud
- Chrome Plated Exposed Flushometer Parts
- Diaphragm, Handle Packing, Stop Seat and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance.
- Flush Accuracy Controlled by CID Technology
- Dual Filtered By-pass Diaphragm

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.2.

► Variations

2-16 3/4 LDIM

► L Dimension

Specify the "L" Dimension for the proper length of the Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2 3/4".


► Actuator Types: (not included-order separately-please check one)

- ☐ Fixture Wall Actuator (HY-33-A) (rear access required)
- ☐ Metal Partition Actuator (HY-49-A)
- ☐ Side Wall Mounted Actuator (HY-72-A)
- ☐ Metal Button Fixture Wall Actuator (HY-100-A) (rear access required)
- ☐ MBPM - Metal Button Panel Mount (HY-108-A)

See Actuator Specification pages for details on Actuators.

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

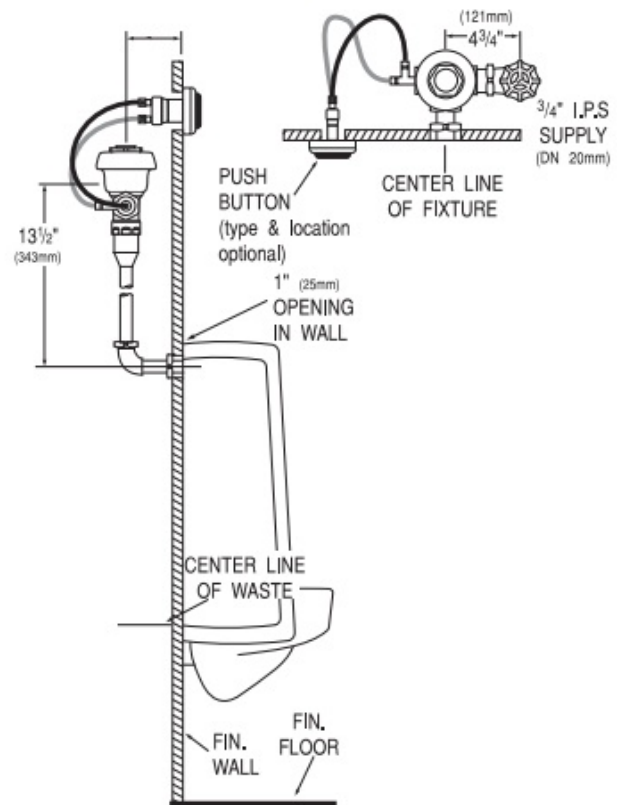

► Compliance & Certifications



This space for Architect/Engineer Approval