

Flex Damper – Ceiling Radiation Damper

FlexDamper®

PC-RD06C6



- Folded ceramic curtain style damper to meet both Combustible and Non-Combustible UL Assemblies
- Allows for two-stage construction; fan housing and damper sleeve during framing, fan/motor/damper installation after finishes
- Easy access to fan/motor/damper for maintenance
- Approved for WhisperGreen® Select, WhisperCeiling® DC, WhisperSense® DC, WhisperFit® DC, and WhisperValue® DC 10 1/4" 50-150 CFM fans*, fan/lights and fans with motion sensor
- Galvanized steel frame with 165°F fusible link
- High temperature, non-asbestos, reinforced fiber thermal fabric damper

ADDITIONAL BENEFITS

- For use in 1, 2, and 3 hour rated floor-ceiling and roof-ceiling constructions (UL 555C and UL 263)
- 5 year warranty

*Please see product submittal for approved model numbers




File #: 3225-1598:100



All-in-one flexible radiation damper for combustable and non-combustible assemblies.

PC-RD06C6

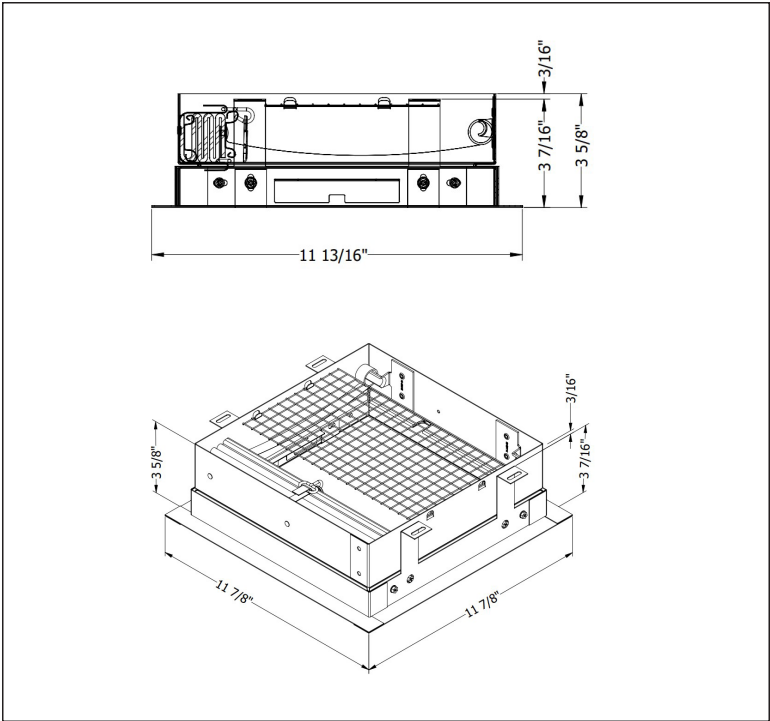


Integrated metal notch allows for easy installation of lights and motion sensors

Kit includes:


- Radiation damper
- Galvanized steel frame
- Mounting screws for frame to fan housing
- Clip and grommets to secure wire/pigtail
- Plaster guard
- Installation guide
- Warranty information

	UL Approved for the Following Fan Models:
Damper Model PC-RD06C6	WhisperGreen Select, WhisperCeiling DC, WhisperSense DC, WhisperFit DC, WhisperValue DC Please see product submittal for approved model numbers

NON-COMBUSTIBLE ASSEMBLY

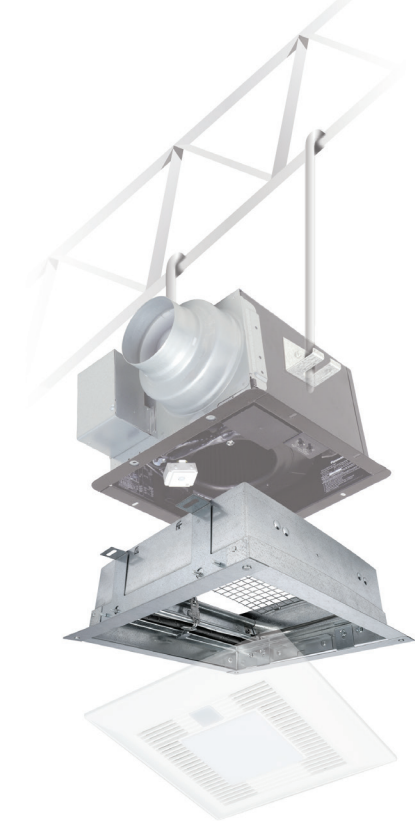

COMBUSTIBLE ASSEMBLY

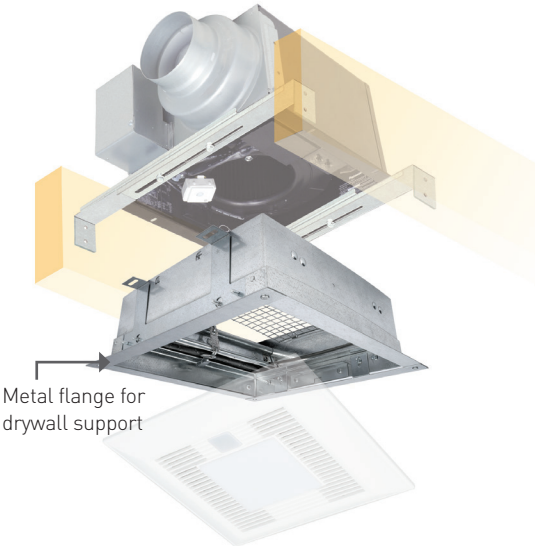

Metal flange for drywall support



Panasonic
IAQ Division
Two Riverfront Plaza
Newark, NJ 07102
iaq.na.panasonic.com

For Order Information
PHONE: 866-292-7299
FAX: 888-553-0723
ventfans@us.panasonic.com